

Wired magnetic door contact sensor

NO/NC mode optional

20±5(mm) gap distance


MAX Voltage≤100VDC,MAX current≤500mA

Suitable for wooden door or window

Fireproof ABS shell,White/Brown color optional

Weight10g

SMQT®

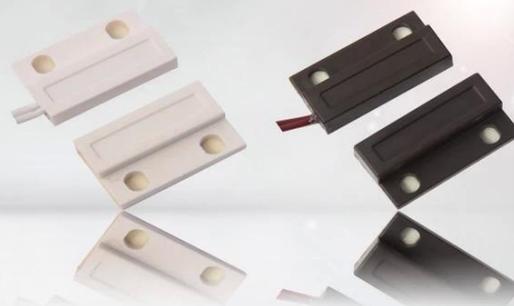

• Parameter

SMQT®

Parâmetro	
Nome do Produto	Sensor de porta magnético com fio
Modelo	EB-134
Dimensão	24 × 41 × 6 (mm)
Modo de código	NO / NF (opcional)
lacuna	20 ± 5 (mm)
Tensão máxima	≤ 100V DC
Corrente máx.	≤500mA
Classificação máxima	≤ 10W
Cor	Castanho / Branco (opcional)
Adequado para	Porta ou janela de madeira
Material	Caixa anti-incêndio ABS
Temperatura de trabalho	-10 °C ~ 50 °C
Peso líquido	10g

• In-kind shooting

SMQT®



• *Feature*

SMQT



EB-134

Dimension:24×41×6(mm)

NO/NC mode optional(default is NC mode)

20±5(mm) Gap

MAX voltage≤100VDC,MAX current≤500mA

Suitable for Wooden door or window

Fireproof ABS material shell

White/Brown color optional

Weight 10g

Welcome OEM, 2 years quality warranty

•Packaging & shipping

SMQT

Lista de embalagens	
Nome do Produto	EB-134
Quantidade	1600 peças por caixa
Tamanho do cartão	38 * 30 * 30 (cm)
Peso	20kg



WE LOGISTICS



• Office show

SMQT



• Exhibition

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair