

Wired magnetic contact sensor

NC/NO mode optional

20±5(mm) gap distance


MAX voltage≤100V DC,MAX current≤500mA

Suitable for wooden door or window

White/Brown color optional

12g weight

SMQT®

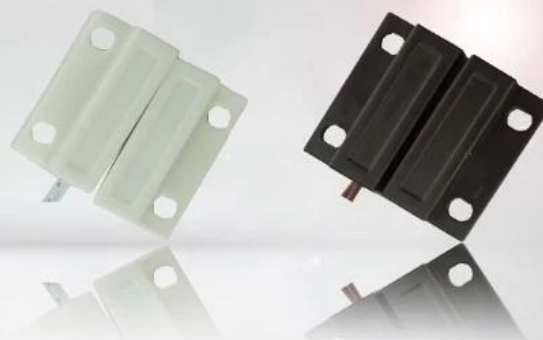

• Parameter

SMQT®

Especificação	
Nome do Produto	Sensor de contato magnético de porta com fio
Número do modelo	EB-134
Dimensões	24L * 14W * 6H (mm)
Conexão	Normalmente aberto / normalmente fechado
Distância de funcionamento	20 ± 5 (mm)
Pressão máxima	≤ 100VDC
Corrente de carga	≤500mA
Potência de trabalho	≤ 10W
Material da Caixa	ABS material à prova de fogo
Cor da forma	Castanho / Branco
Escopo	Porta ou janela não ferrosa
Peso do Produto	10g

• Introduction

SMQT®

O sistema magnético de controle de acesso de porta e alarme de porta magnética é o detector magnético porta contato interruptor porta senSor.


PRODUCT FEATURE



• *Feature*

SMQT

PRODUCT FEATURE

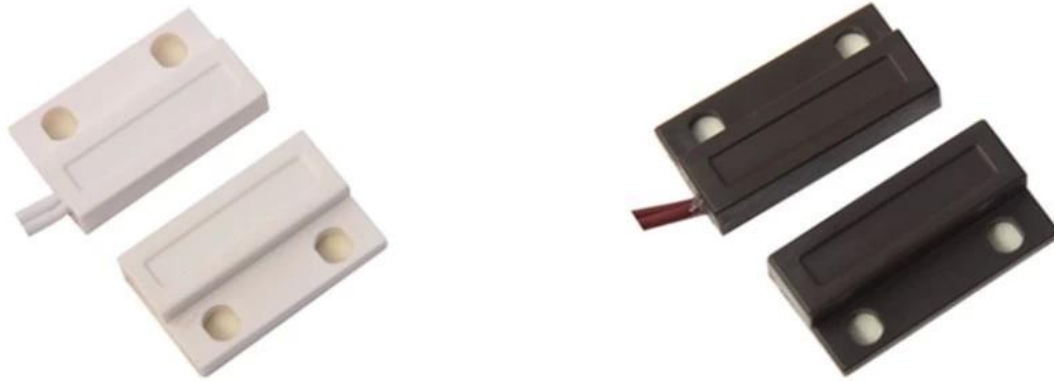

EB-134

Dimension: 24×41×6(mm)

NO/NC mode optional (default is NC mode)

20±5(mm) Gap

MAX voltage ≤ 100VDC, MAX current ≤ 500mA

Suitable for Wooden door or window

Fireproof ABS material shell

White/Brown color optional

Weight 10g

Welcome OEM, 2 years quality warranty

● *Packaging & shipping*

SMQT®



• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

