Parameter

SMQT

Наименование товара	Outdoor водонепроницаемый датчик луча
Номер модели	ABT
Рабочее напряжение	13.8 ~ 24VDC 11 ~ 28VAC
Рабочий ток	40-65mA
скорость Индикация	50 ~ 700м / сек
Выход Анти-снос	Северная Каролина
температура окружающего воздуха	-20 ℃ ~ + 50 ℃
выход сигнала тревоги	НЕТ / NC
регулировка уровня	180 ° ± 90 °
Vertocal регулировка	± 10 °
цвет	черный
материал	PC смолы

Introduction

SMQT

PRODUCT PICTURE

Инфракрасный луч барьера детектор движения используется на заборе,

как инфракрасный работы детектора забор с системой сигнализации.

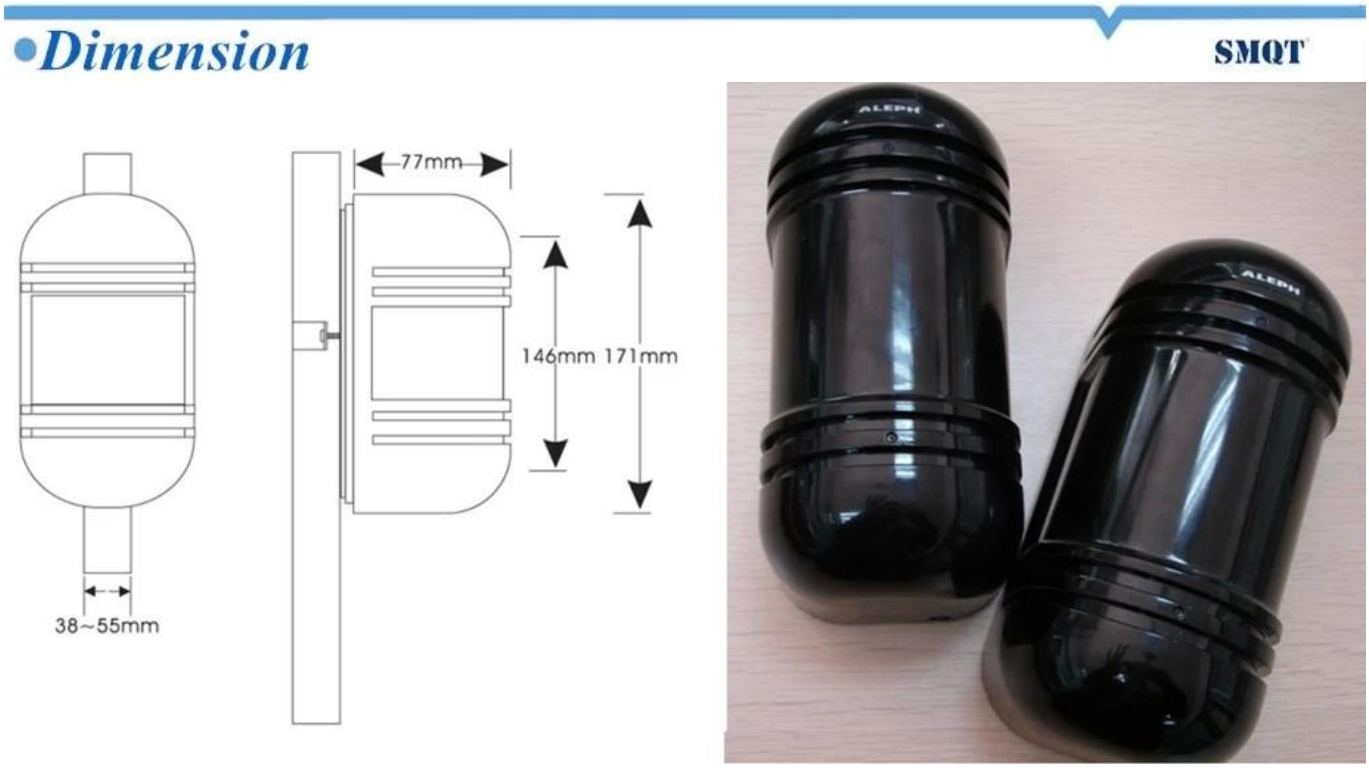

PRODUCT FEATURE

Sealed integration structure is able to work inthe has enviroment

Automtically regulate to confranted with fog or inclement weathe

Sensitivity(AGC circuit)

easily adjust and calibrate the horizontal/vertical optional angle

Built -in integrate optical telescopes, anti-jamming jacket

Anti-lighting circuit designed

High-power infrared receiver on the tubes,low-power digital

•*Packaging & shipping*

SMQT

• *Office show*

SMQT

• *Exhibition*

SMQT

2011 Brazil Fair
2012 Shenyang Fair
2013 Jinan Fair
2013 Shenzhen Fair
共赢
.....
2012 Shenyang Fair
2013 Shenyang Fair
2013 Shenzhen Fair
2015 Shenzhen Fair