Parameter

SMQT

Количество балок	2/4/6/8/10
Расстояние (в помещении)	5м / 10м / 20м / 30м / 40м / 60м
Детектор высоты	37/72/125/167 / 209 см
Рабочий ток	30 мА ~ 80 мА
Рабочее напряжение	DC12V ~ DC18V
Время обратной связи	<1.5ass
Контакт реле	3A, AC120V / DC24V
Отрегулируйте угол	180º ± 90º
Температура окружающей среды	-35 ℃ ~ 55 ℃

Introduction

SMQT

Низкочастотное инфракрасное излучение: бытовая техника (система дистанционного управления) без помех;
Интеллектуальное определение интенсивности света: снижение энергопотребления, уменьшение ложных срабатываний;
Разнообразные варианты монтажа: поверхностный и скрытый монтаж без точного выравнивания;
Перекрестная инфракрасная съемка: полностью избегайте воздействия солнечного света (уникальная технология);
элегантный внешний вид: стремление к идеальному сочетанию современного домашнего украшения.

Фотоэлектрические инфракрасные лучи Костюм датчика барьера для использования с сигнализацией окошка и забора.

Инфракрасные заборы (также называемые «инфракрасными перилами») - это разновидность активной инфракрасной съемки, в которой используется многолучевой инфракрасный свет от радиопередатчика к приемнику, чтобы в режиме «Низкочастотный передатчик с обнаружением с разделением по времени» излучался инфракрасный свет, когда человек или объект, блокирующий любые соседние два или более световых луча, излучаемых передатчиком, превышает 30 мсек, приемник выдает сигнал тревоги немедленно, когда рядом с солнечным лучом находятся маленькие животные или маленькие объекты, сигнал тревоги не будет выводить сигнал тревоги.

1. Protective cover
2. Mounts
3. Lead Block
4. Tamper proof switch
5. Infrared light transmitting sheet
6. Aluminum alloy rod models
7. Lead

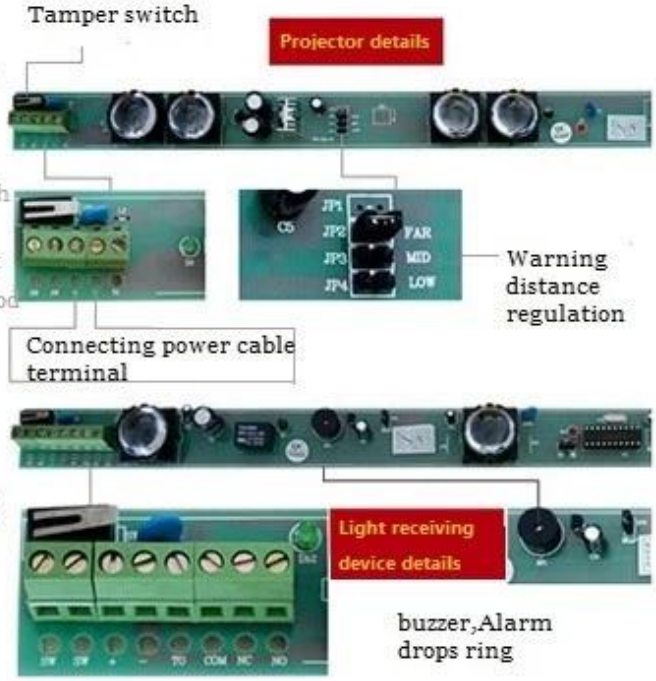

Dimesion Picture

SMQT

Translucent instrument

Optical receiver

71cm(4 beams) The speed of light is different in different lengths

Installations

SMQT

Using CPU micro processing intelligent control, intelligent distinction through the size of the object, there is an illegal intruder when the fence to trigger an alarm. When the smaller cats, dogs, birds and other small animals through the fence , the detector will not trigger the alarm, does not affect people's trouble to switch windows.

Features

SMQT

With tamper resistant, anti interference, high reliability

With anti demolition, anti interference function, when there is an intruder to remove or damage, the immediate alarm model, the

Tamper switch, when the invaders destroyed or disassembled, tamper switch will trigger the alarm immediately bounce.

Waterproof moisture-proof function, can adapt to bad weather

Because this product is used in indoor and outdoor, the use of universal is relatively strong. The products according to the scientific design, with rain proof structure for installation of indoor and outdoor machine of supermarket zone, waterproof, dust-proof, wind and rain, wind and rain does not matter, can adapt to all kinds of bad environment and weather.

Aluminum alloy material design: beautiful and reliable structure

Main body outer shell is made of high quality aluminum alloy material, and the surface of the polishing treatment, bones and durable; the import filter to visible light good filtering function.

Installation and debugging is convenient, 3 when the warning distance can be adjusted

After the installation of the fixed infrared beam of the launch and reception of vision can be achieved 360 degrees of rotation, three block adjustable warning distance, convenient and sensitive.

The bracket adopts the latest sliding cover to be designed, and the installation is more convenient. Disassembly more secure.

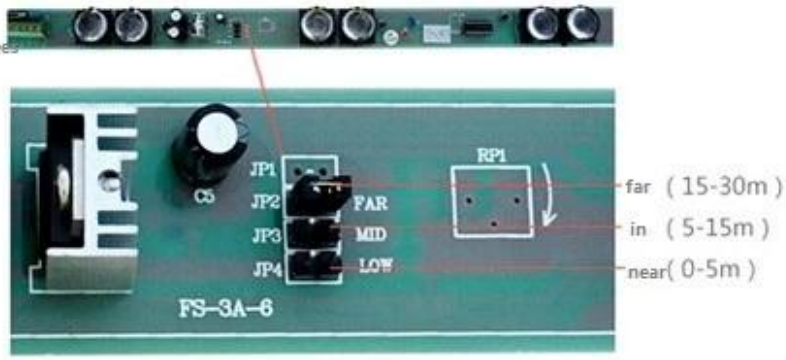

3 warning distance adjustable map

Packing list

SMQT

Wireless infrared beam sensor

Mounting screw

User manual

Packaged box

Office

SMQT

Exhibitions

SMQT