

Converter RS232 to RS485

Compatible with RS-232,RS-485/RS-422 standard of EIA/TIA

RS-232 interface, DB9(holes)

RS-422/RS-485 interface,DB9(pin) with 6 terminals

300-115.2kbps transmission speed


Twisted-pair cables as transmission medium

With protection of $\pm 15\text{KVESD}$,RS-422/RS-485 of 600W lightning strike and surge power of each line.

3500VRMS isolation

500VDC isolation voltage

SMQT

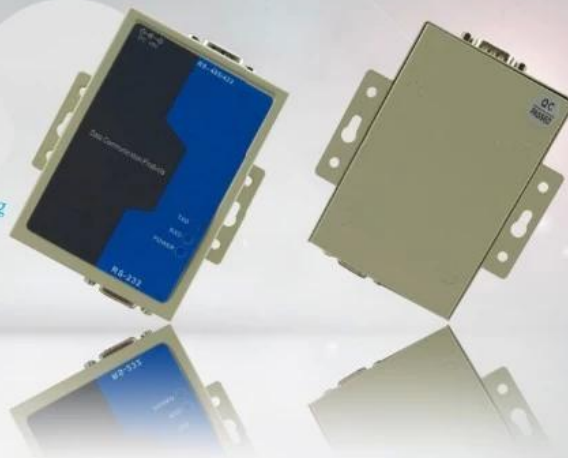

• Parameter

SMQT

Размер товара	90L * 65W * 25.5H (мм)
Внешний источник питания	DC9V
Особенности интерфейса	Интерфейс совместим с EIA / TIA RS-232C, RS-485 / RS-422 стандарт
Электрический интерфейс	RS-232C интерфейс DB9 разъем порт, RS-422 / RS-485 разъем DB9 и оснащен шестью терминалами
Скорость передачи	300-115.2KBPS
индикация сигнала	Три сигнала фары TXD RXD ВЛАСТЬ
среда передачи данных	Экранированная витая пара проводов
Класс защиты	RS-232 $\pm 15\text{KVESD}$ защита, RS-422 / RS-485 интерфейс к 600W на линию защиты от грозных перенапряжений
изоляция	3500VRMS
Напряжение изоляции	500VDC непрерывной
Окружающая среда	5% до 95%
Рабочая Температура	0 °C ~ 50 °C

• Introduction

SMQT

Преобразователь контроля доступа двери 2-проводное Ethernet rs485 rs422 преобразователь и DC преобразователь для дома.



• Feature

SMQT



Converter RS232 to RS485

Interface compatible with EIA / TIA RS-232C,
RS-485 / RS-422 standard

Electrical Interface:

RS-232C interface DB9 female connector port,
RS-422/485 Interface DB9 female connector

Transmission medium: shielded twisted pair wire

300-115.2KBPS transmission rate

Lightning surge protection

Working Humidity: 5%~95%


Environment temperature: 0 °C ~ 50 °C

Net weight: 0.62kg

Welcome OEM and 2 years quality warranty

● *Installation*

SMQT

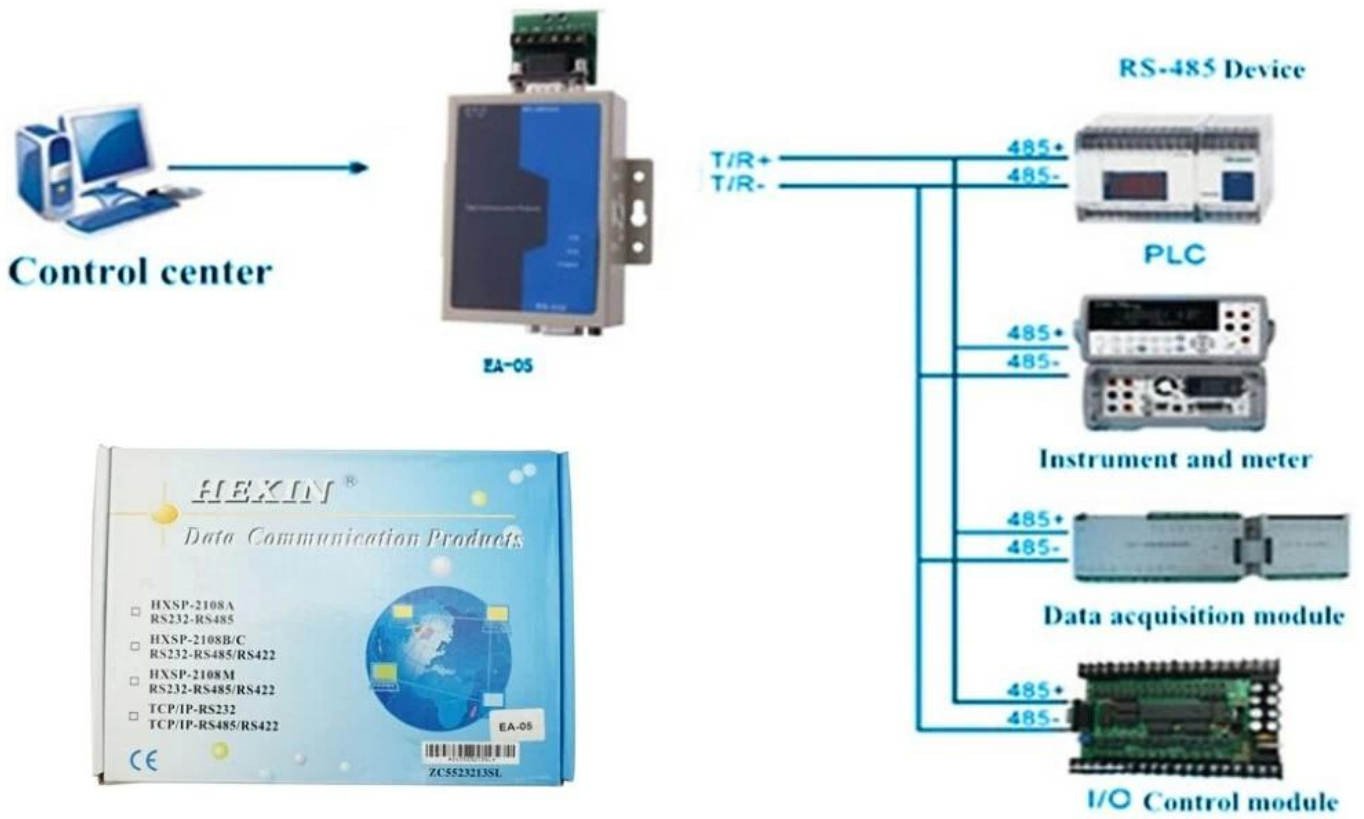

• Show case

SMQT[®]



• Packaging & shipping

SMQT[®]



• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair