• Parameter

SMQT

Размер товара	90L * 65W * 25.5H (мм)
Внешний источник питания	DC9V
Особенности интерфейса	Интерфейс совместим с EIA / TIA RS-232C, RS-485 / RS-422 стандарт
Электрический интерфейс	RS-232C интерфейс DB9 разъем порт, RS-422 / RS-485 разъем DB9 и оснащен шестью терминалами
Скорость передачи	300-115.2KBPS
индикация сигнала	Три сигнала фары TXD RXD ВЛАСТЬ
среда передачи данных	Экранированная витая пара проводов
Класс защиты	RS-232 ± 15KVESD защита, RS-422 / RS-485 интерфейс к 600W на линию защиты от грозовых перенапряжений
изоляция	3500VRMS
Напряжение изоляции	500VDC непрерывной
Окружающая среда	5% до 95%
Рабочая Температура	0 ℃ ~ 50 ℃

• Introduction

SMQT

Преобразователь контроля доступа двери 2-проводное Ethernet rs485 rs422 преобразователь и DC преобразователь для дома.

•Feature

SMQT

EA-05

Converter RS232 to RS485

Interface compatible with EIA / TIA RS-232C, RS-485 / RS-422 standard

Electrical Interface:

RS-232C interface DB9 female connector port, RS-422/485 Interface DB9 female connector

Transmission medium:shielded twisted pair wire

300-115.2KBPS transmission rate

Lightning surge protection

Working Humidity:5%~95%

Environment temprature:0 ℃ ~ 50 ℃

Net weight:0.62kg

Welcome OEM and 2 years quality warranty

•*Installation*

SMQT

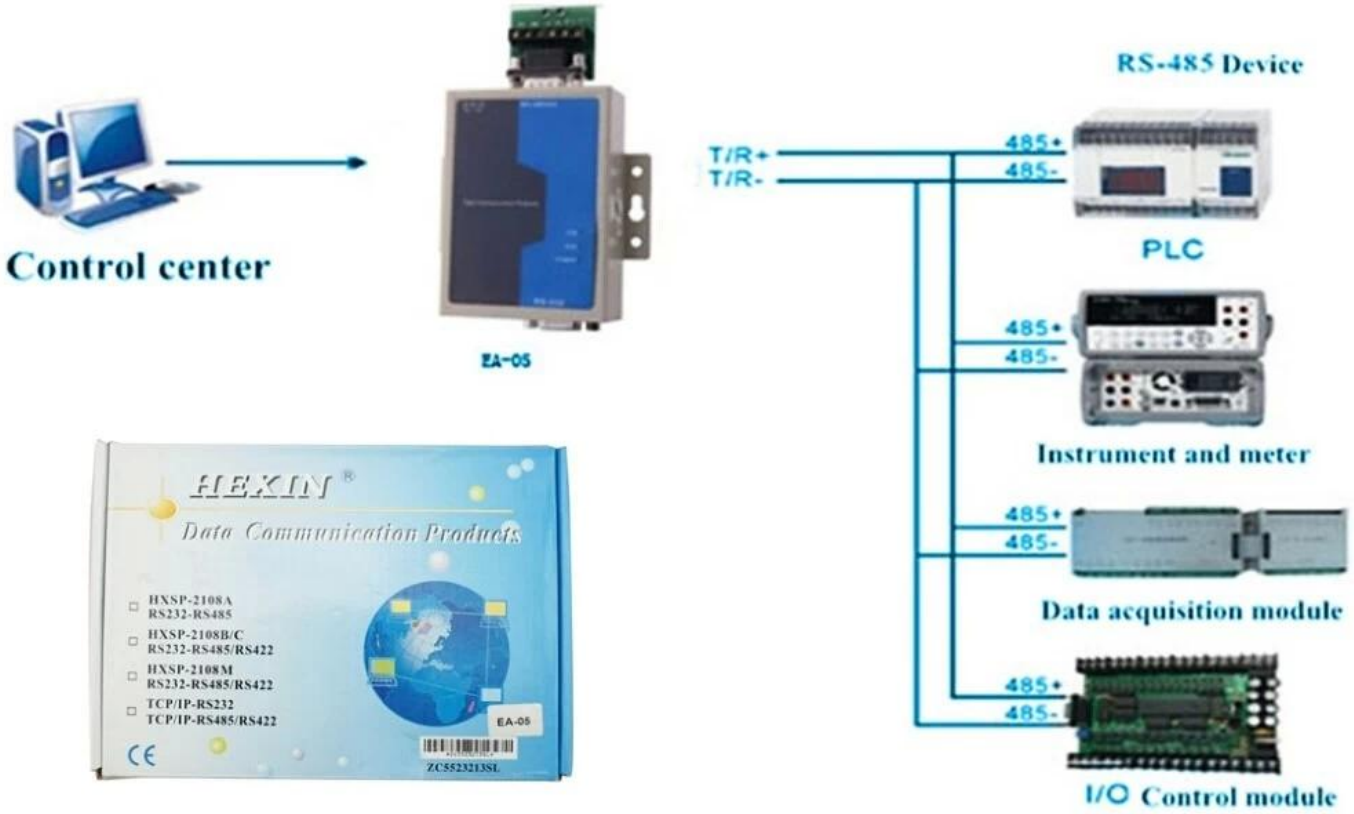

•Show case

SMQT

•Packaging & shipping

SMQT

• *Office show*

SMQT

• *Exhibition*

SMQT

2011 Brazil Fair
2012 Shenyang Fair
2013 Jinan Fair
2013 Shenzhen Fair
共赢
.....
2012 Shenyang Fair
2013 Shenyang Fair
2013 Shenzhen Fair
2015 Shenzhen Fair