

# Wired magnetic contact sensor

*Fireproof ABS material shell*

*NO/NC model optional*


*Brown/white color optoinal*

*20±5(mm) gap distance*

*Suitable wooden door or window*

*14g weight*

**SMQT®**

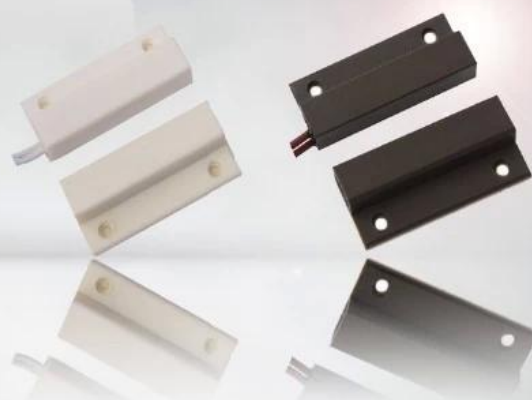

## • Parameter

**SMQT®**

|                       |                                         |
|-----------------------|-----------------------------------------|
| Габаритные размеры    | 41L * 27W * 8 (мм)                      |
| подключение           | Нормально открытый / нормально закрытый |
| Рабочее расстояние    | 20 ± 5 (мм)                             |
| максимальное давление | ≤100VDC                                 |
| Ток нагрузки          | ≤500mA                                  |
| Рабочая мощность      | ≤10W                                    |
| Материал корпуса      | ABS пожаробезопасный материал           |
| Форма цвета           | Коричневый / Белый                      |
| Объем                 | Цветных двери или окна                  |
| Вес изделия           | 12g                                     |

## • Introduction

**SMQT®**

Двери магнитный контакт детектор выключатель двери датчик движения для устройства открытой двери близости тревоги датчика.

# PRODUCT PICTURE



## PRODUCT FEATURE



EB-132

*Dimension: 34×41×6.5(mm)*

*NO/NC mode optional*

*20±5(mm) distance gap*

*MAX voltage ≤ 100VDC, MAX current ≤ 500mA*

*Fireproof ABS material shell*

*White/Brown color optional*

*Suitable for wooden door or window*

*14g weight*

*2 years quality warranty, welcome OEM*



## • Office show

SMQT®



## • Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

