

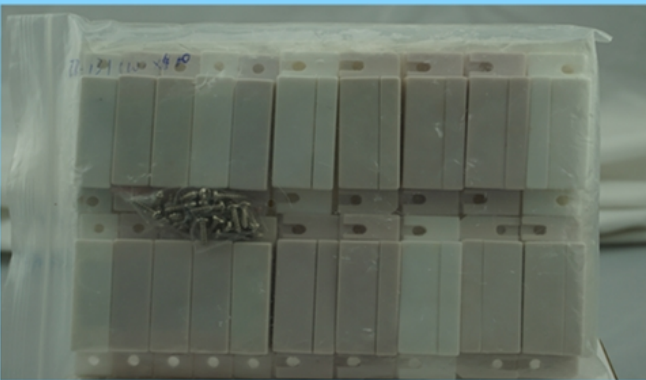
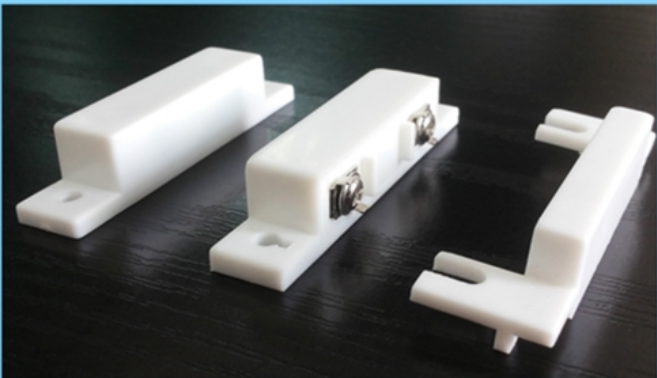
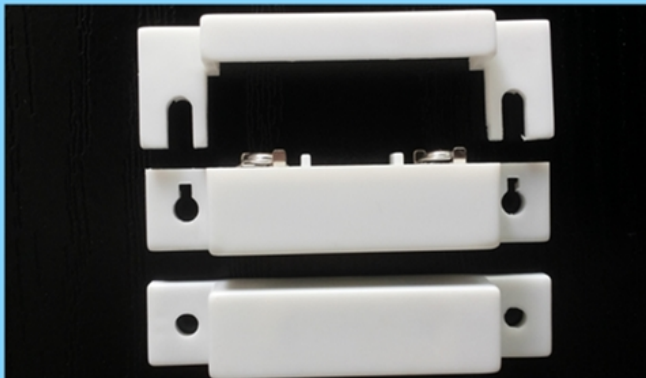
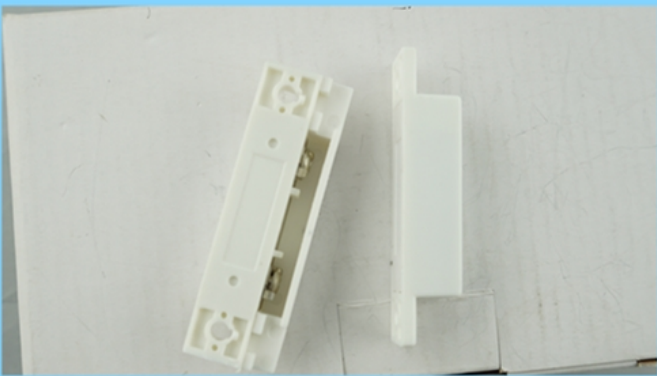
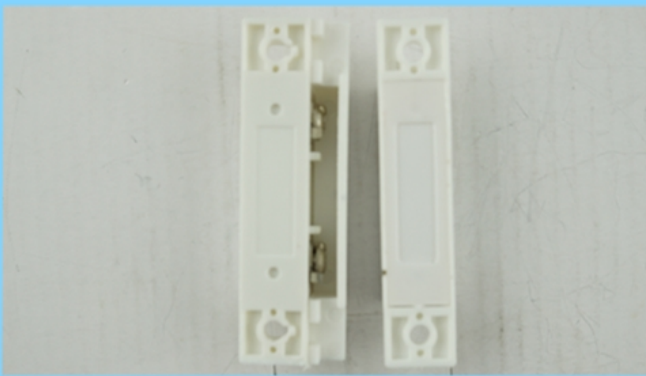


New

Access control & Alarm product supplier

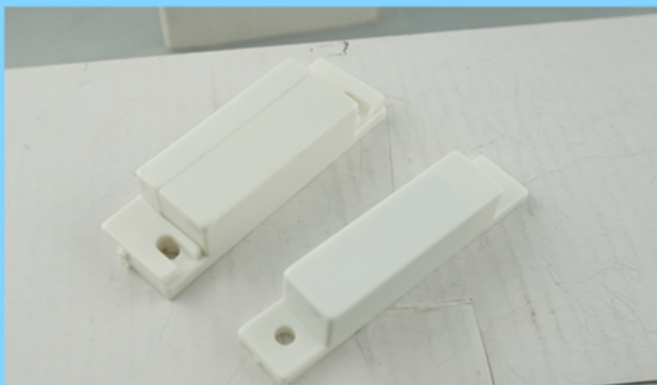

EB-131A ?

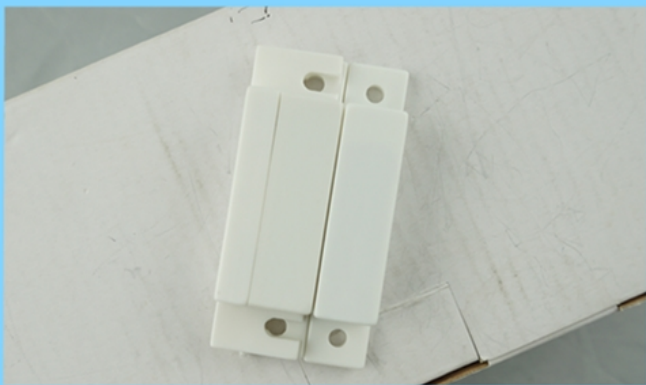


EB-131A'S MAIN PARAMETER

□□□□□□□□□□□□:	2 □□□□□□□□□□□□□□□□□□□□□□□□□□□□
□□□□□□□□□□□:	EB-131A
□□□□□□□□□□□□□□□□□:	Max DC 100
□□□□□□□□□□□□□:	□□□□□□ 0.5A


消費電力:	10W
端子接続:	NC / COM
端子間隔:	20 ~ 30mm
寸法:	本体寸法: 64 * 20 * 13 (mm.) 端子間隔: 64 * 13 * 13 (mm.)
動作電圧:	動作電圧範囲: 5V ~ 12V
動作電流:	動作電流: ABS + 動作電流 + 動作電流
動作温度:	動作温度: 0°C / 50°C (動作温度範囲)
重量:	重量: 15g 10 個入りパッケージ: 250 個入り
パッケージ:	パッケージ: 2 個
OEM:	OEM 対応

動作電圧範囲 EB-131A 動作電流範囲?

NC mode working principle

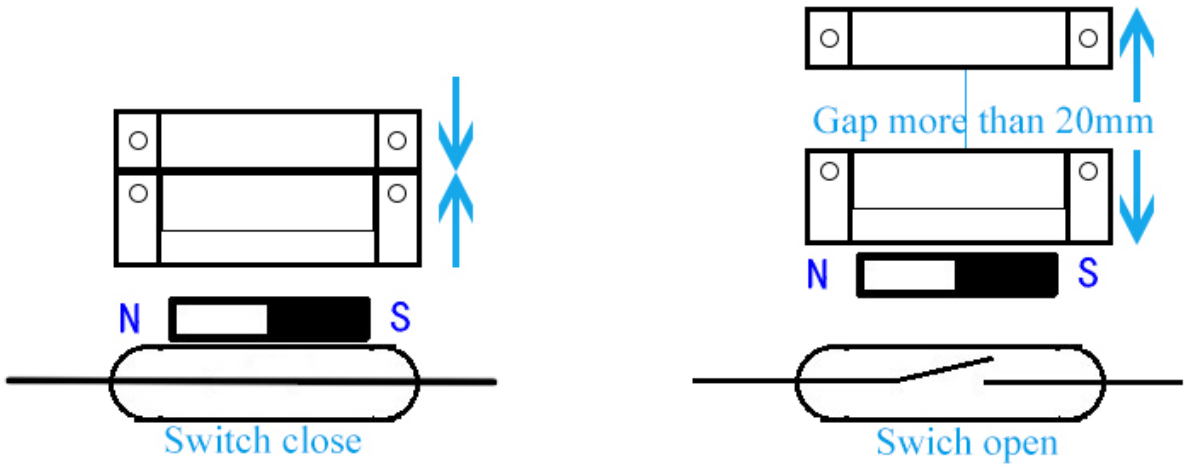

Installation

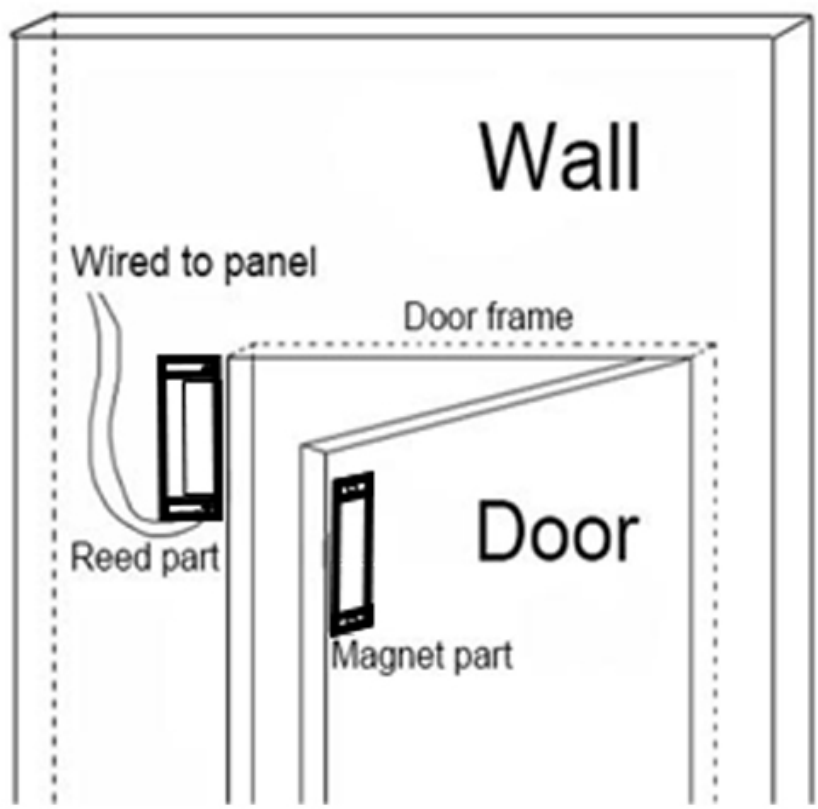


□□□□□□□□□□□□□□□□ □


SMQT
铭汗科技




SMQT
铭汗科技

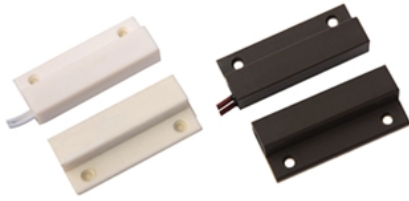

SMQT
铭汗科技

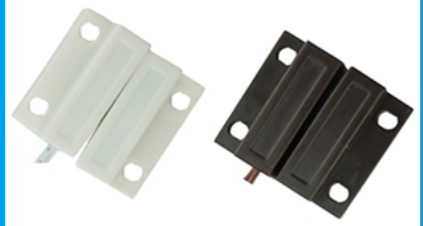

SMQT
铭汗科技

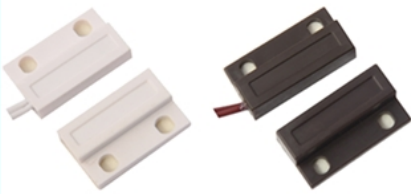

SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技

