




2020 COVID-19



Dynamic facial Reader

with face temperature and mask checking

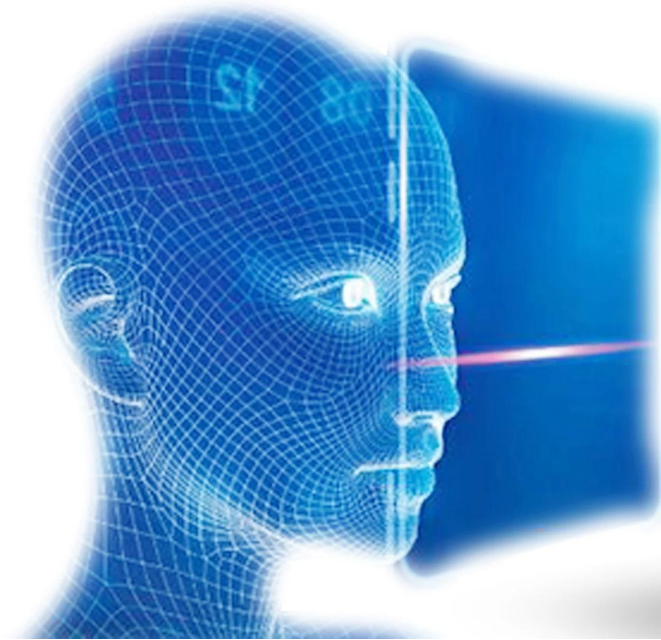



MF-T1008

产品名称	2020 COVID-19	
型号	MF-1008A	MF-1008B
产品描述		
处理器	3516DV300	
存储	EMMC 16 GB	
摄像头	1 / 2.7 "CMOS	
屏幕	4.5 英寸	
操作系统	7 英寸 TFT	
分辨率	600 * 1024	
接口	16: 9	
网络接口	网络接口 8Ω / 2 英寸	
产品规格		
重量	2 英寸, 1920 * 1080	

照度. 照度	照 0.01Lux @ F1.2 (ICR); B / W 0.001Lux @ F1.2	
SNR	≥50db (照 AGC)	
WDR	≥80db	
照照照照照照照照		
照照照照	1.2-2.2 M 照照照照照照	
照照照照	0.5-2 照照	
照照照照	照照照照± 40 照照	
Reco 照照	<500ms	
照照照照照	照照照照照照照照照 22400 照照照照照照照照照 100000 照照照照	
照照照照照		
照照照	30-45 (°C)	
照照照照照照照	± 0.5 (照照照照照照照照)	
照照照照照	0.4 照	
照照照照照照照	<500ms	
照照照照照照照		
照照照照照照照照照照照照照照照	RJ45 10M / 100M 照照照照照照照	
照照照 Weigand	照照照照照照照 / 照照照照照 26 照 34	
照照照照照照照照照照照	照照照照照照照照照 1 照照	
照照照照照照照照照照照	照照照 1USB (照照照照照照照照照照照 ID Identifier)	
照照照照		
照照照照照照照照照	DC 12 照照照 / 3A	
照照照照照照照照照	20W (照照照照)	
照照照照照照照照照照照照照	-15 °C ~ + 60 °C	
照照照照照	5 ~ 90% 照照照照照照照照照照	
照照照	123.5 (W) * 45.5 (H) * 266 (L) 照	123.5 (W) * 45.5 (H) * 266 (L) 照
照照照照照	1.9 照	2.1 照

feateurs 照照照 照照照 MF-T1008 照?

Size

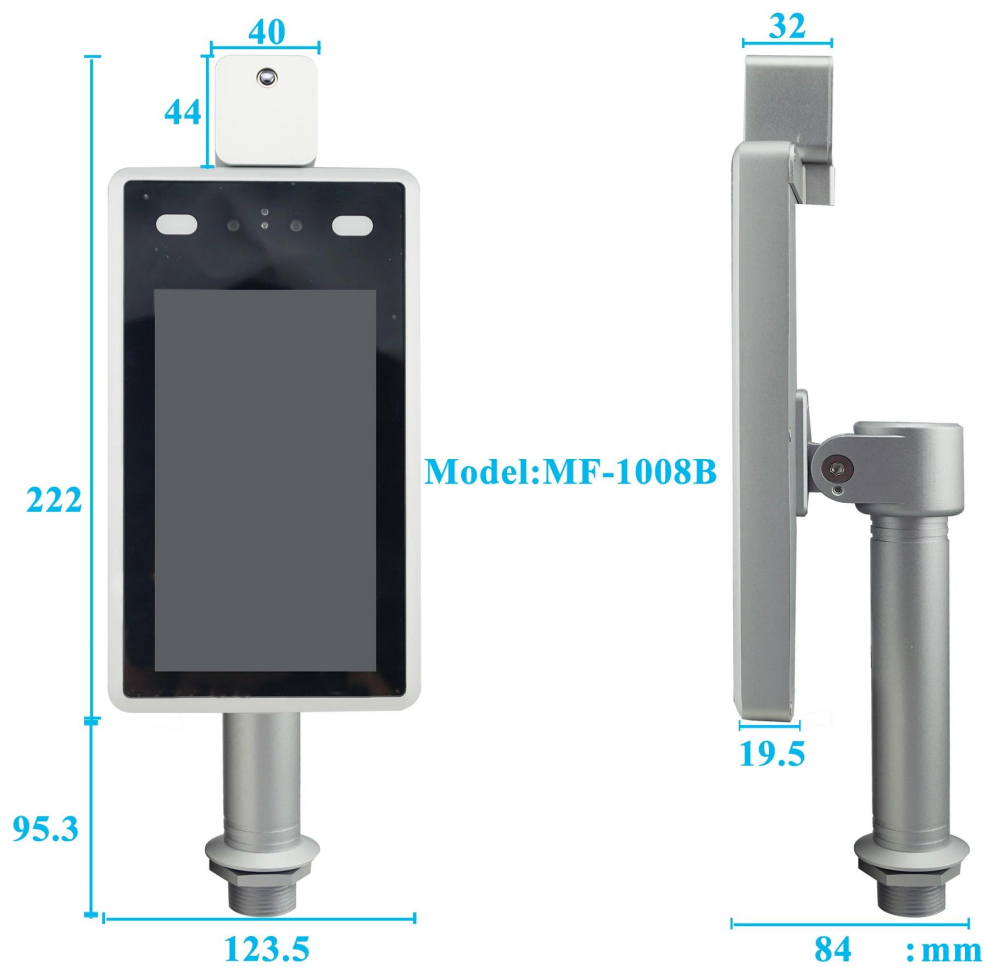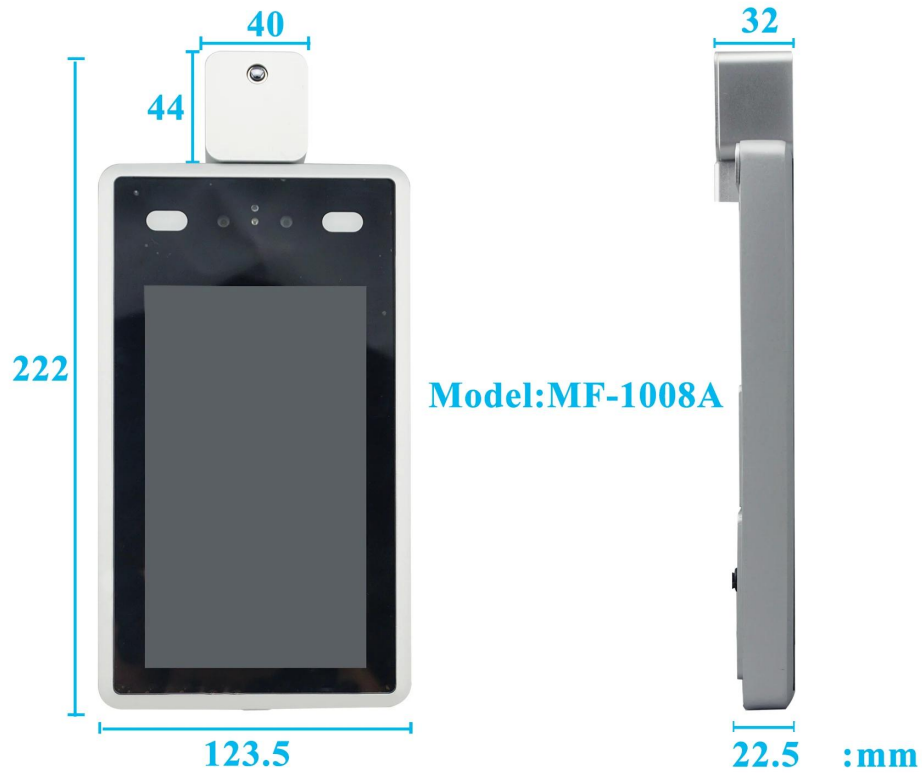


Device Feature

10 system languages and voice adjustable

English
繁体中文
русский
Deutsch
Le français
한국어
Português
Espanol
lingua italiana
日本の


Celsius and Fahrenheit temperature display adjustable

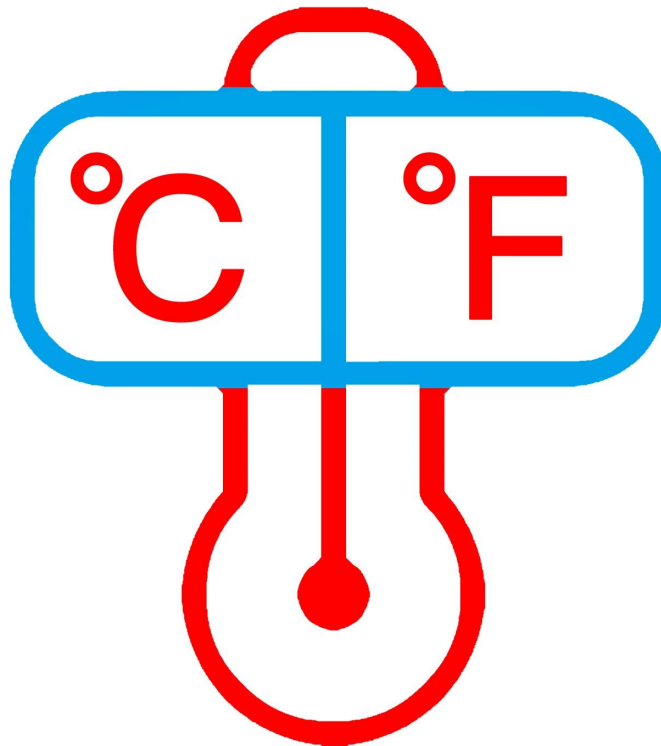

Wire interface introduction



Browser software interface

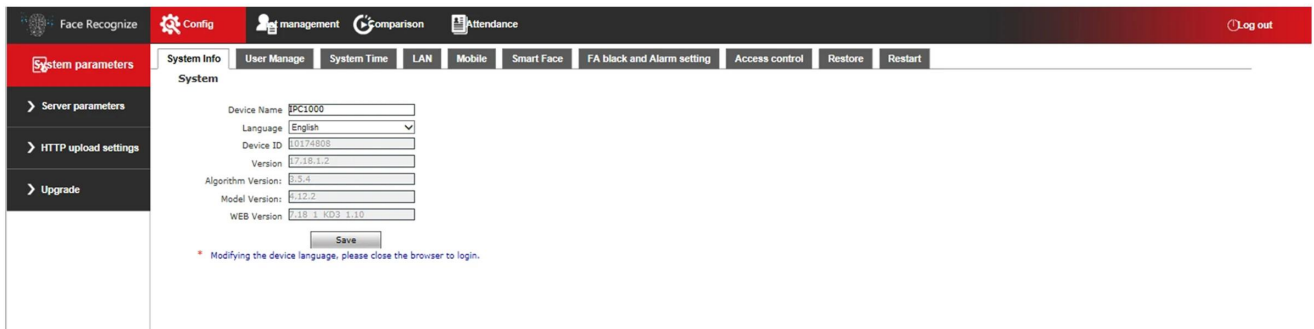

Body temperature detecting in live



MF-1008A



MF-1008B

Temperature measurement range 30-45 (°C) Accuracy $\pm 0.5(^{\circ}\text{C})$;

Automatically identify unmasked personnel and provide real-time warning;

Support mid-range temperature measurement and real-time warning of high temperature;

Support temperature data SDK and HTTP protocol docking;

Support binocular live detection;

Unique face recognition algorithm to accurately recognize faces, face recognition;

time <500ms;

Adopt Linux operating system for better system stability;


IP34 rated dust and water resistant;

MTBF> 50000 H;

Support 22400 face comparison library and 100,000 face recognition records;

Support one Wiegand input or Wiegand output;


Packages

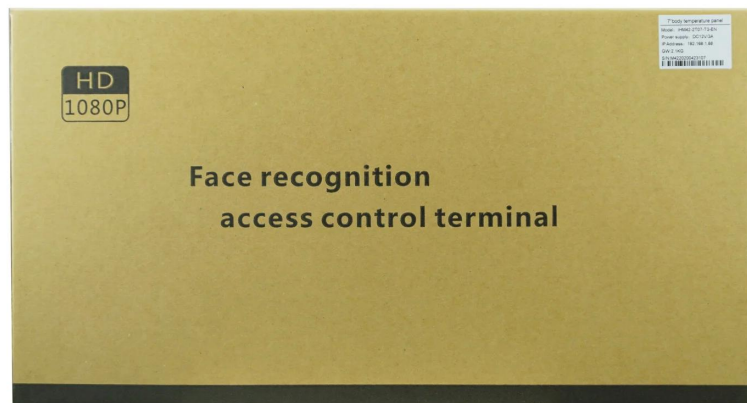

Optional Bracket



A bracket
For MF-1008B




0.55m

B bracket
For MF-1008B



1.1m

C bracket
For MF-1008B

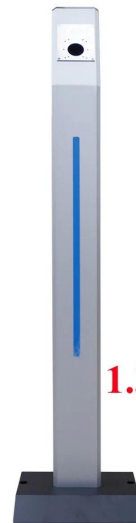

1.3m

D bracket
For MF-1008A

Access control & Time attendance



Apply to a variety of **access control** and **time attendance** sites, such as factories, offices, schools, supermarkets, and so on.

□□□□□□□□□□□□□□□□□□?



