




EB-117B



EB-117B'S MAIN PARAMETER

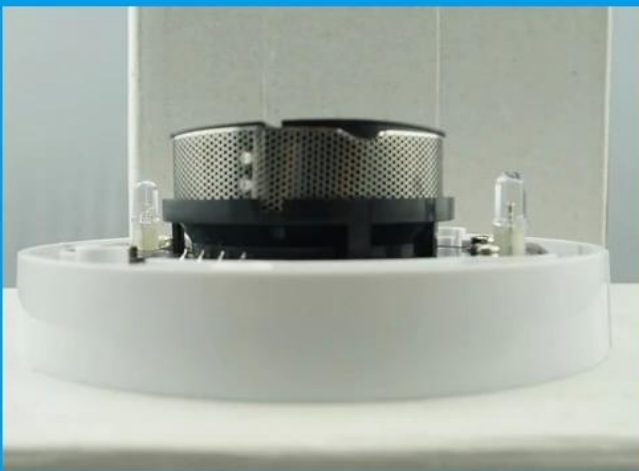

EB-117B'S MAIN PARAMETER

DETECTOR TYPE:	4 WIRE DETECTOR (NO NC DETECTOR)
MODEL:	EB-117B
POWER SUPPLY:	DC 9 ~ 35V
WIRE CONNECTION:	4 WIRE (VCC + GND - DETECTOR (COM) NO NC)
SIZE:	100 * 60 (mm)
INSTALLATION:	20mm DETECTOR HOLE
LED:	LED 2
OPERATING TEMPERATURE:	-10 ~ +50 °C
RELATIVE HUMIDITY:	0 ~ 90% RH (NON-CONDENSING)
WEIGHT:	0.18kg
LED:	LED 2
INSTALLATION:	ABS + PCB DETECTOR
INSTALLATION:	2
OEM:	OEM

EB-117B DETECTOR?



1.4 wire fire alarm system photoelectric smoke detector

2.Working power 9~35V DC

3.Standby current :2 mA(24V NO), 13mA(24V NC)

4.Alarm current:18 mA(24V NO),6 mA(24V NC)

5.Alarm indication:Red LED on

6.Wire port: POWER+(In)/POWER-/ COM/

7.Suitable for fire alarm panel system


8.Conformed EN54-7/UL268 standard

9.2 years warranty , welcome OEM

EB-117B WORKING □□□□□□□□□□?



4 wire detectors wiring diagram

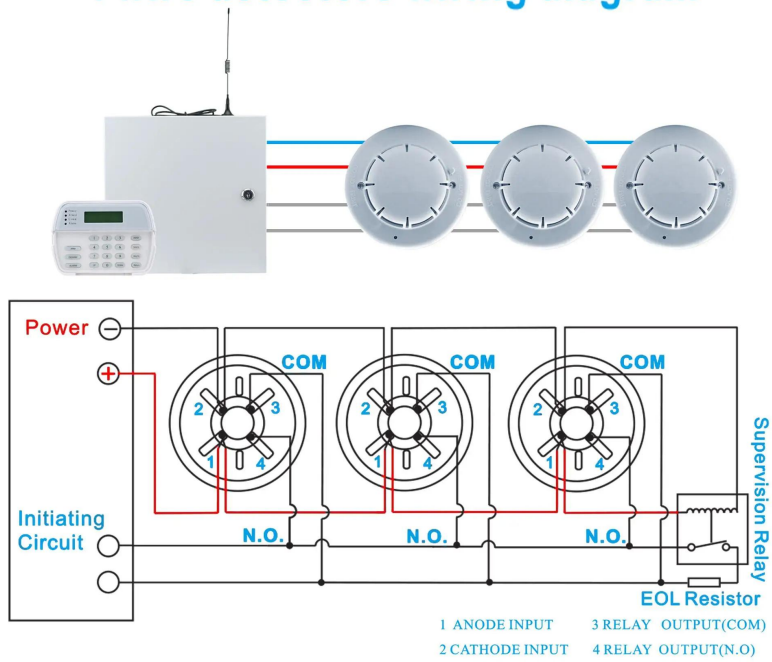

PCB board display



Where to installation?



Mall



Library



Bank

SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技

