



1.9~35V DC 4 wire fire alarm system photoelectric smoke detector

2.Working power DC 9~35V

3.Standby current 2mA(24V NO),13mA(24V NC)

4.Alarm current 18mA(24V NO), 6mA(24V NC)

5.Alarm indication:Red LED on

6.Wire port: POWER+(In)/POWER-/COM/NC(NO)

7.Suitable for fire alarm system



8.Conformed with EN54-7/UL268 standard

9.2 years warranty , welcome OEM

EB-117D □□□□□□□□□□□□□□□□?




4 wire detectors wiring diagram

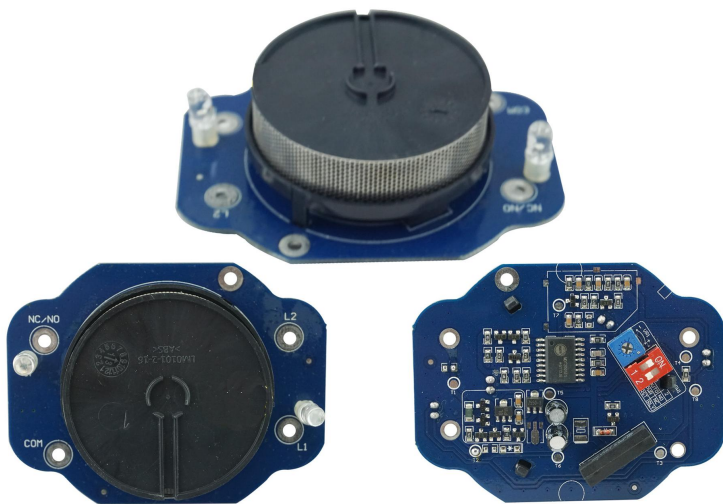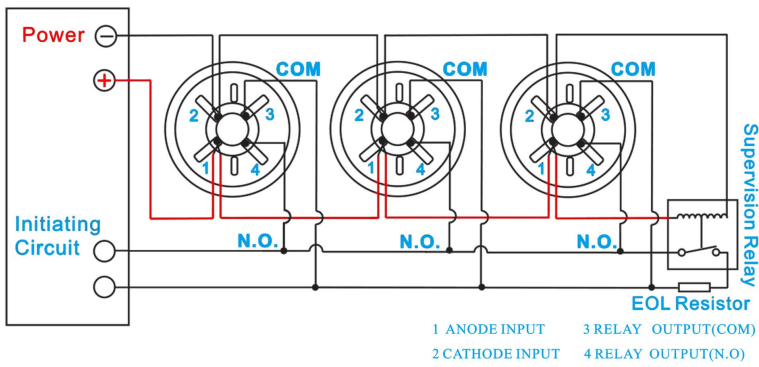

PCB Board

Where to installation?



Mall



Library



Bank

SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技

