

XX
XX



EB-138B'S MAIN PARAMETER



XXXXXXXXXXXXXXXXXXXX:	XX
XXXXXXXXXXXXXXXXXXXX:	EB-138B
XXXXXXXXXXXXXXXXXXXX:	Max DC 100
XXXXXXXXXXXXXXXXXXXX:	XXXXXX 0.5A
XXXXXXXXXXXXXXXXXXXX:	10W
XXXXXXXXXXXXXXXXXXXX:	NC / COM
XXXXXXXXXXXXXXXXXXXX:	20 ~ 30mm
XXXX:	XXXXXX: 49 * 20 * 9.6 (mm.) XXXXXXXXXXXXXX: 49* * * * * 20 9.6 (mm)
XXXXXXXXXXXX:	XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
XXXXXXXXXXXXXXXXXXXX:	XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

ABS:	ABS + 1200 + 1200
ABS:	1200
ABS:	5 1200 1200
ABS:	2 1200
OEM:	OEM

EB-138B'S FEATURE SHOW




Size

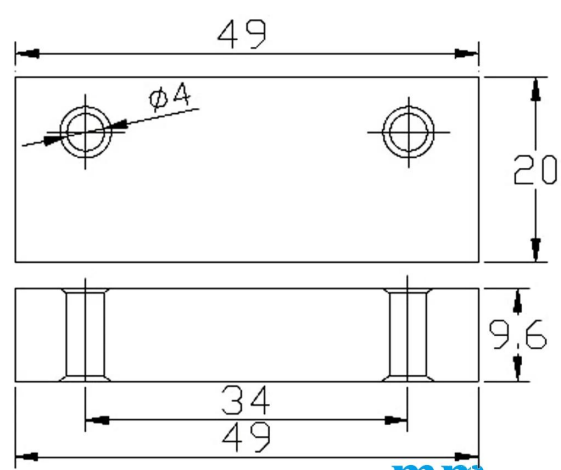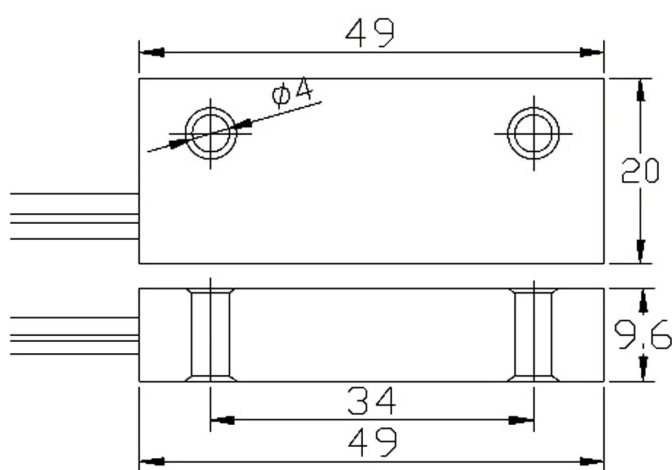


mm

NC mode working principle

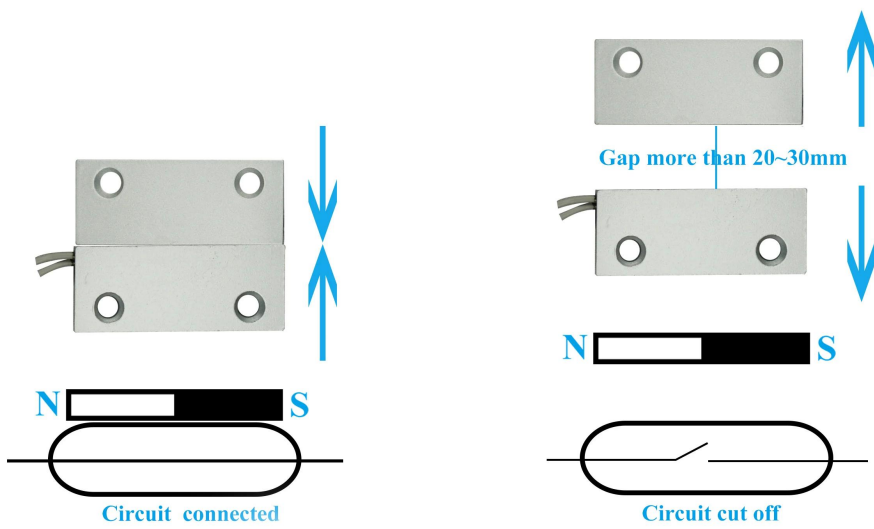

Installation

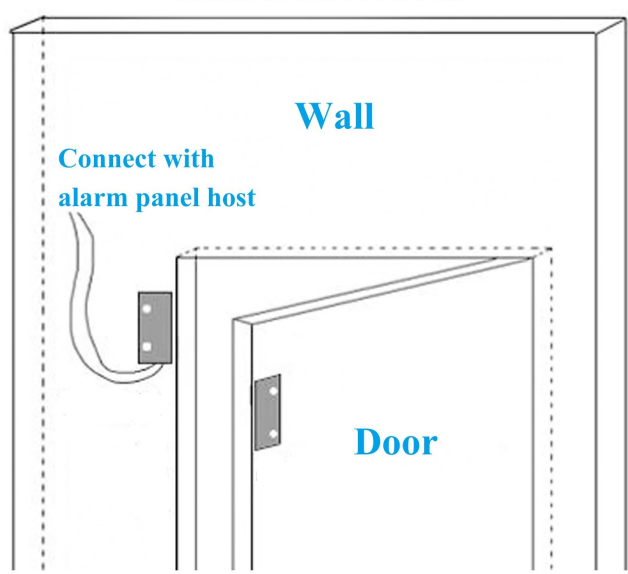

Packaging



10 pairs per bag

SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技

