





問題 EB-117S-2 問題文

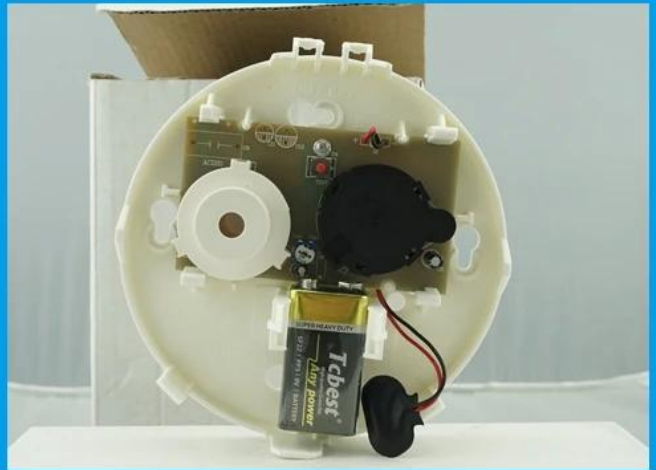

EB-117S-2

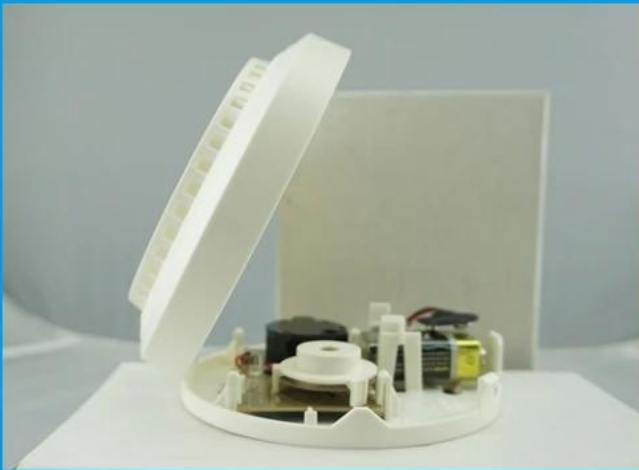

EB-117S-2 PARAMETER

探测原理:	photoelectric
型号:	EB-117S-2
工作电压:	DC 9 (6F22)
探测距离:	> 10m
报警声级:	140 dB (1m)
报警频率:	60 Hz (6 秒)
报警方式:	LED LED 报警 & 蜂鸣器报警
报警时间:	报警时间
报警温度:	-10 ~ +50
报警湿度:	0 ~ 90% RH (非冷凝)
报警重量:	0.2kg
LED:	LED 1
外壳:	ABS + PCB
报警时间:	报警时间
报警频率:	2
OEM:	OEM

EB-117S-2



1.Standalone photoelectric somke detector

2.Working power DC 9V(1 6F22 battery)

3.Standby current :<12uA

4.Alarm current:<=15mA

5.Alarm indication:Red LED flash, alarm sound prompt


6.Sound pressure 85Db at 10 feet

7.Battery life time >=1 year


8.Suitable for office, home use

9.2 years warranty , welcome OEM

EB-117S-2 WORKING □□□□□□□□□□?

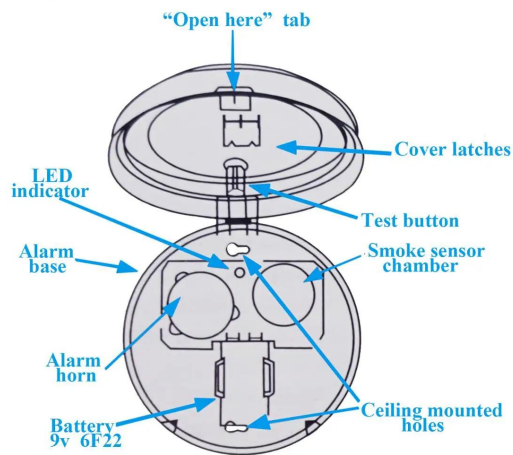


Where it use ?

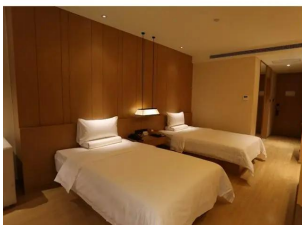

Hotel



Office

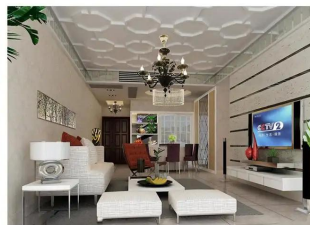

Home



Library



Warehouse

SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技

