

# Converter RS232 to RS485

Compatible with EIA/TIA RS-232,RS-485 standard

Interface:RS232 interface DB9(holes)

RS485 interface DB9(pin)


Transmission medium:normal cables

twisted-pair cables or shield cables

300 to 115-21BDS transmission speed

Working environment :-10 to 80 °C

Working humidity:5% to 95%

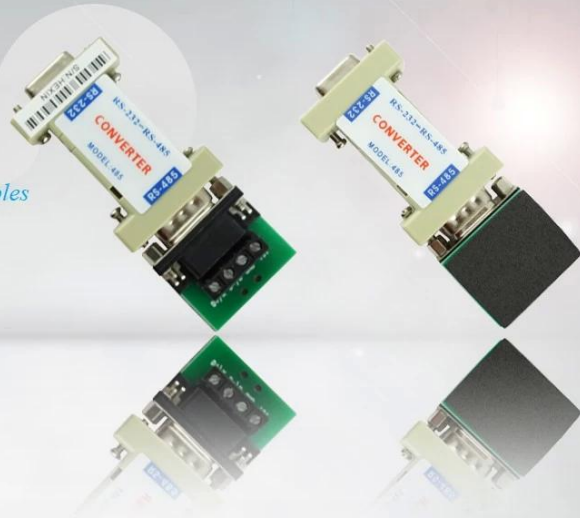

## Parameter




产品名称	RS232 转 RS485
型号	EA-01
尺寸	90 × 33 × 12 (mm)
接口标准	符合 EIA / TIA RS-232C, RS-485 标准
接口类型	S-232C 9针 DB9 母头接口, RS-485 9针 DBP 母头接口 (屏蔽型)
传输速率	300-115200BPS
接口数量	5 针脚 (RS-232 Terminal) 1,200 针脚 (RS-485 Terminal)
信号类型	RS-232: TXD, RXD, RTS, CTS, DTR, DSR, DCD, GND RS-485: + Data-, GND
传输距离	可达 1200 米 (TD, RD GND) 屏蔽型
工作电压	5V
工作湿度	5% ~ 95%
temperature	-10 °C ~ 85 °C
重量	0.106kg

## In-kind shooting





• *Feature*

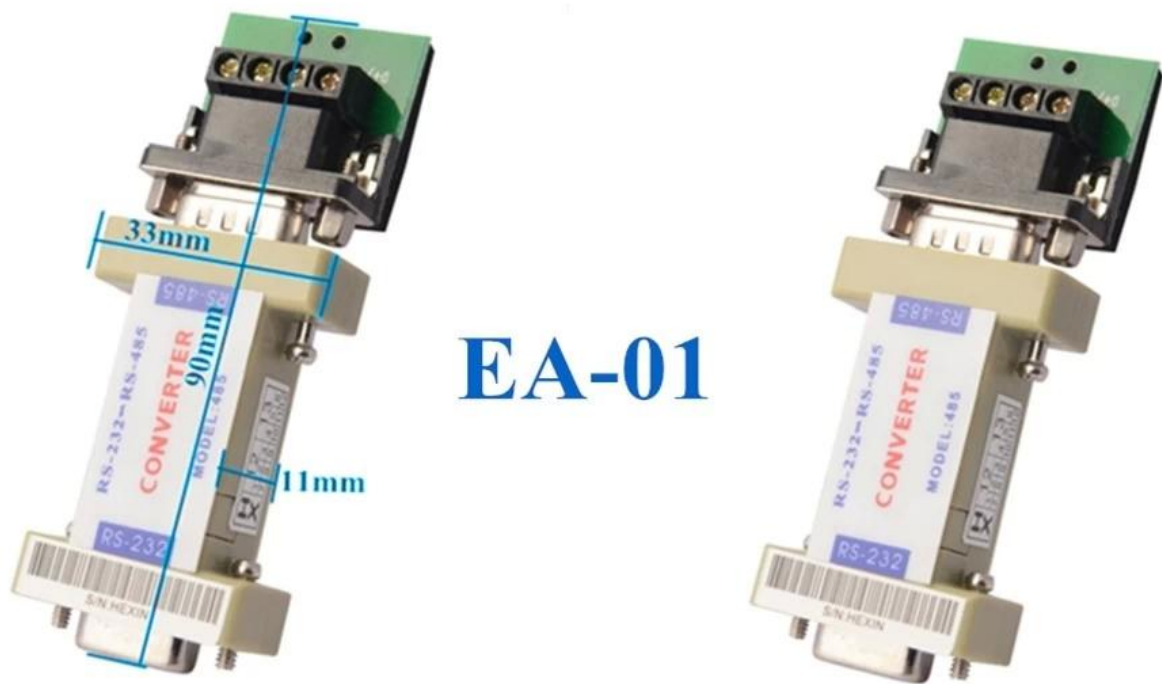

**EA-01**

*Converter RS232 to RS485*

*Dimension:90×33×12(mm)*

*Interface compatible with EIA /  
TIA RS-232C, RS-485 standard*

*RS-232 terminal DB9 female connector port*

*RS-485 terminal DBP pin connector port*

*RS-232: TXD, RXD, RTS, CTS, DTR, DSR,  
DCD, GND*

*RS-485: Data +, Data-, GND, 9V+*

*Relative Humidity:5%~95%*

*Environment temprature:-10 °C~85 °C*

*Welcome OEM, 2 years quality warranty*



# Application

SMQT

Switch Power Supply



Door release button



Standalone controller

Converter (RS232 to RS485) EA-01



PC

# Packaging & shipping

SMQT

□□□□□□□□□□□□□□□□	
□□□□□□□□□□□□	□□□□ RS232 RS485 □□□□□ EA-01
□□□□□	100pcs □□□□□□□□
□□□□□□□□□	53 * 40 * 37 (mm.)
□□□□□□□	10kg



## • Office show

SMQT®



## • Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

