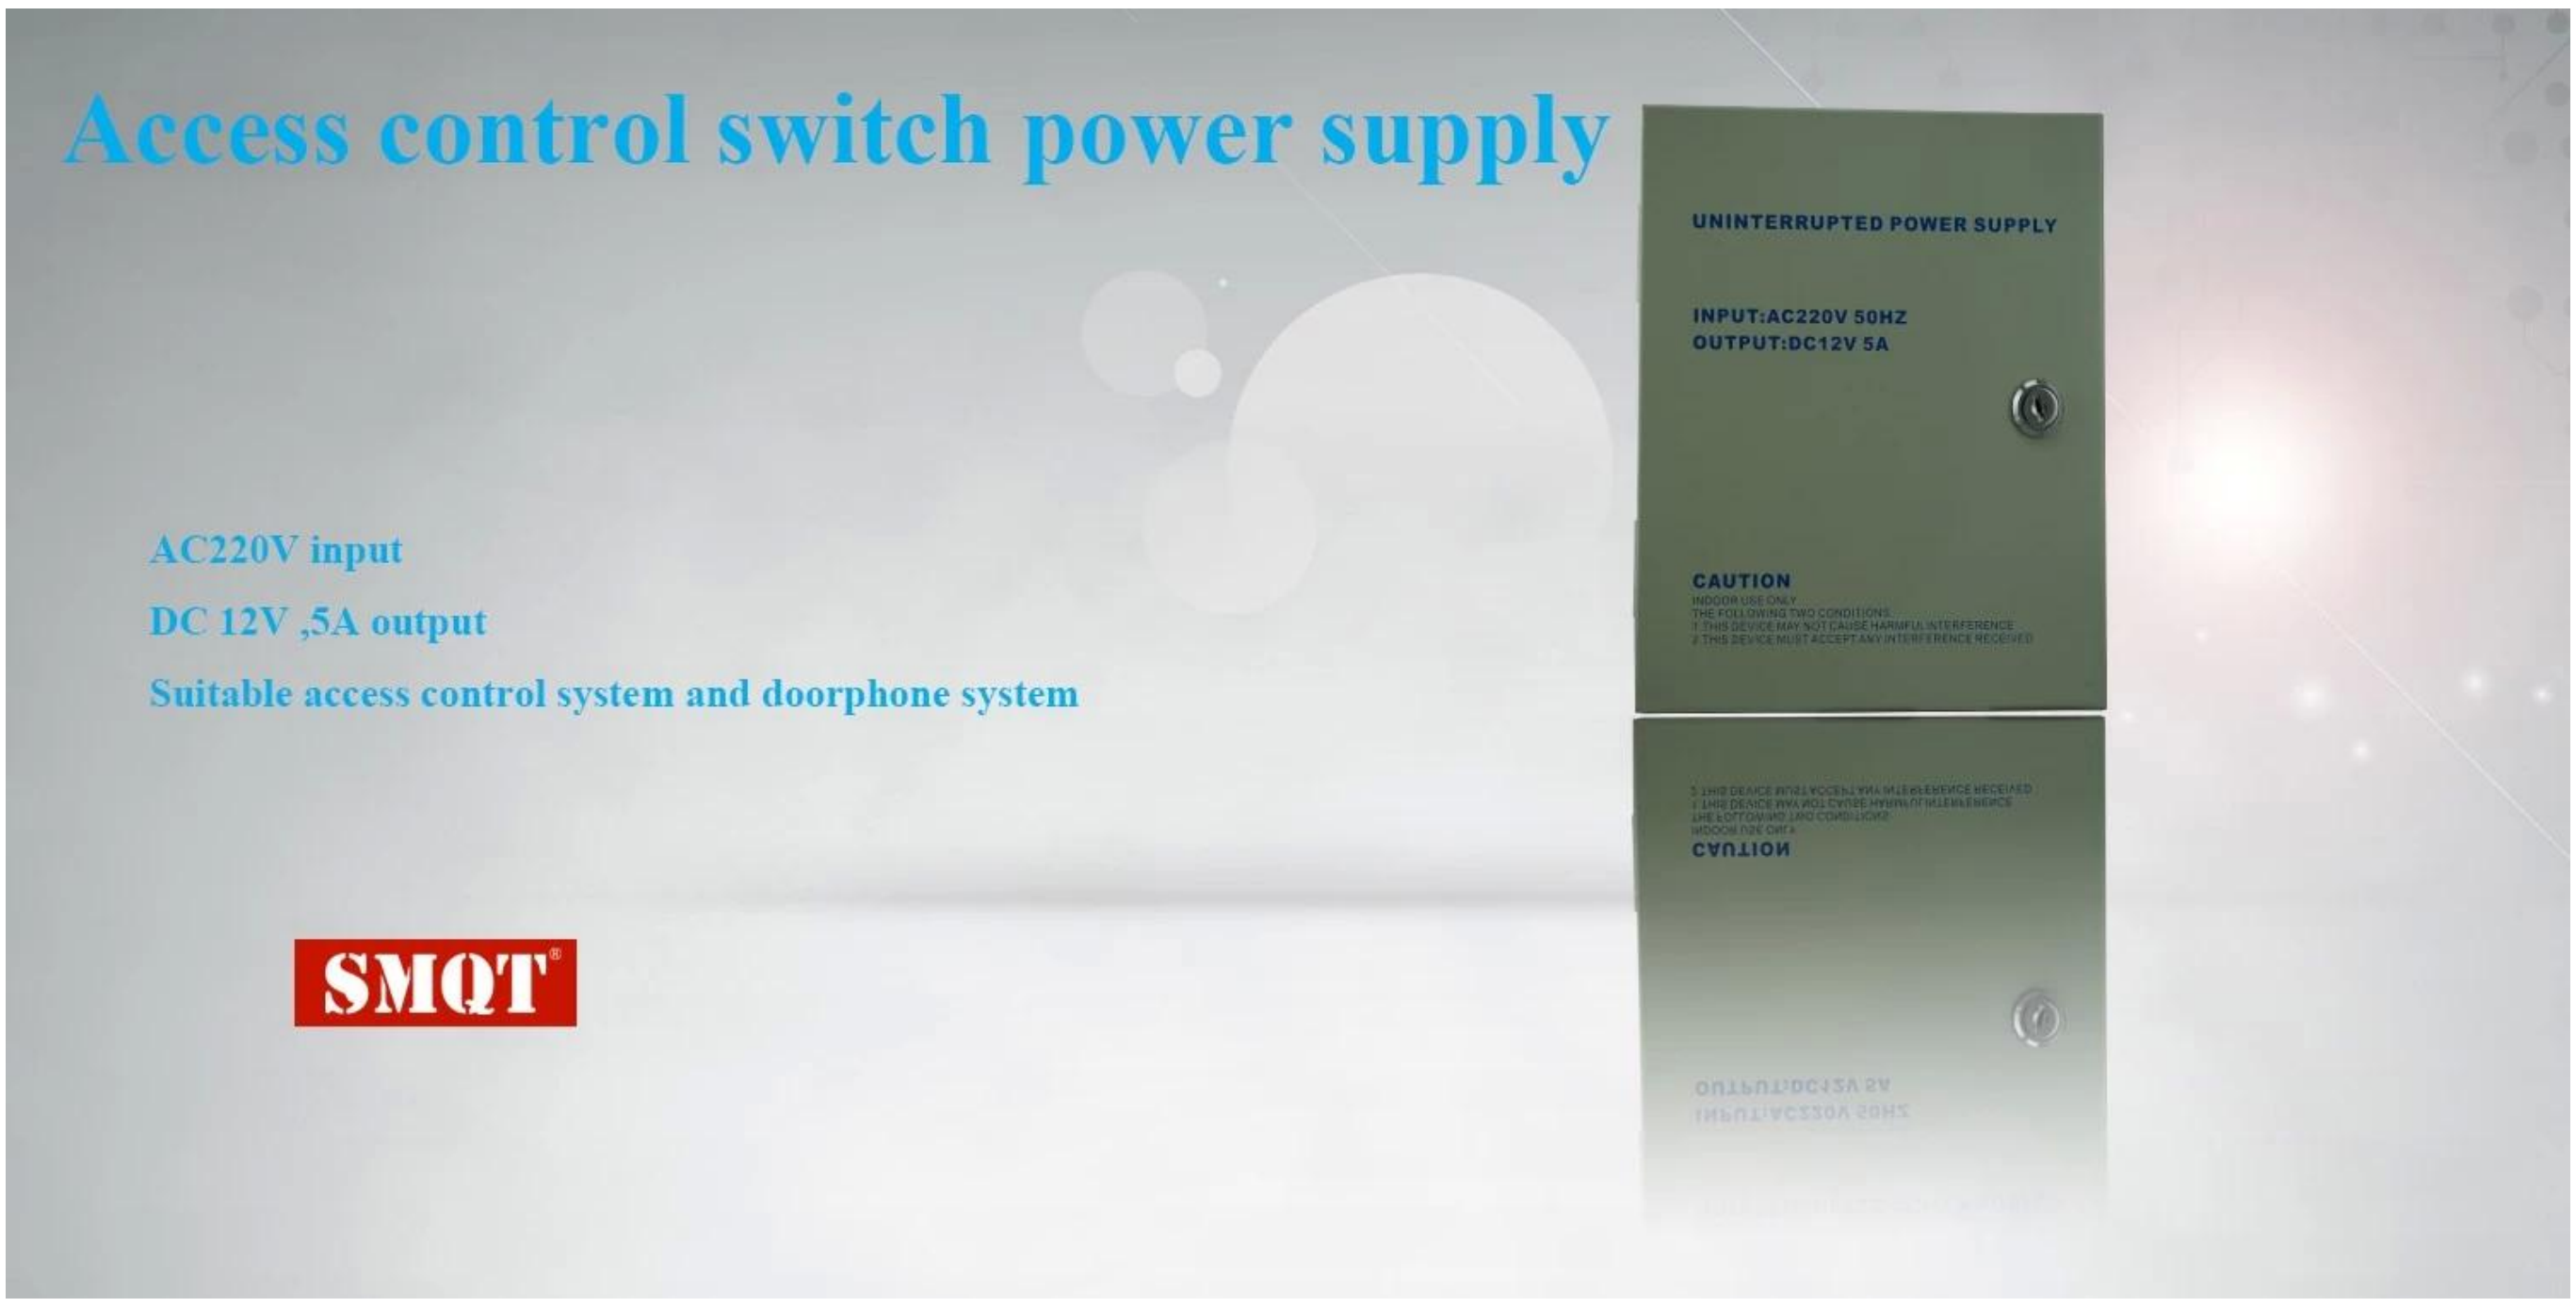

Parameter

SMQT

[illegible]	
[illegible]	DC 12V 5A [illegible]
[illegible]	EA-38B
[illegible]	205 × 165 × 74 (mm)
[illegible]	AC220V
[illegible]	50Hz
[illegible]	12V DC
ouput [illegible]	5A
[illegible]	60W
[illegible]	Built-in [illegible] circut [illegible] interernce
[illegible]	0 ~ 15 [illegible]
[illegible]	[illegible] PC [illegible] [illegible] [illegible] [illegible]
[illegible]	[illegible]
[illegible]	sysetm [illegible] doorphone
temprature [illegible]	-20 ℃ ~ 61 ℃
[illegible]	2.5 [illegible]
optionals	[illegible] [illegible] ([illegible] 80 [illegible]) [illegible] [illegible] (12V 7AH)

Introduction

SMQT

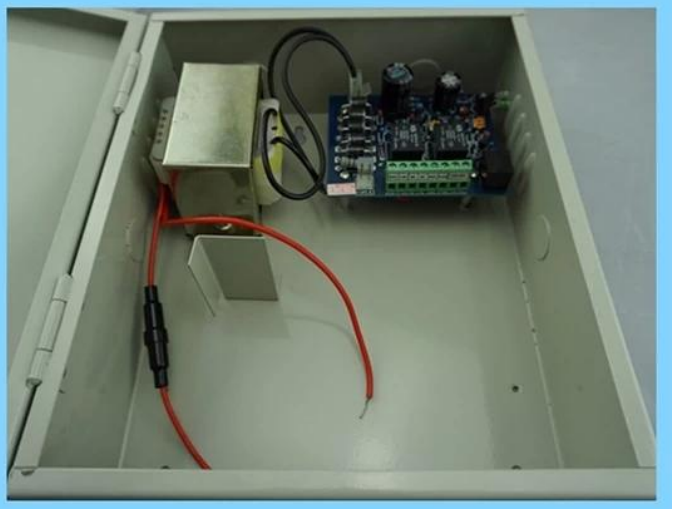

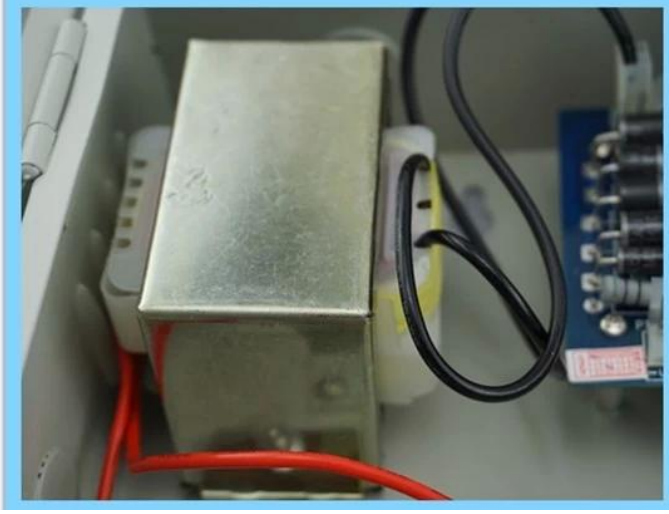

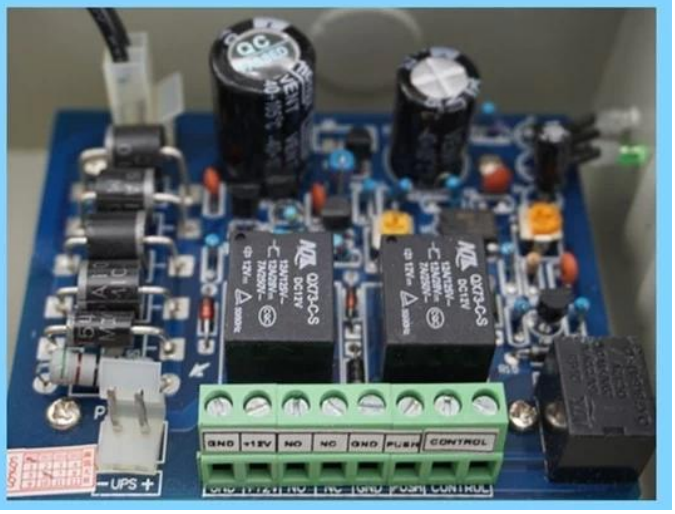

•*Feature*

SMQT

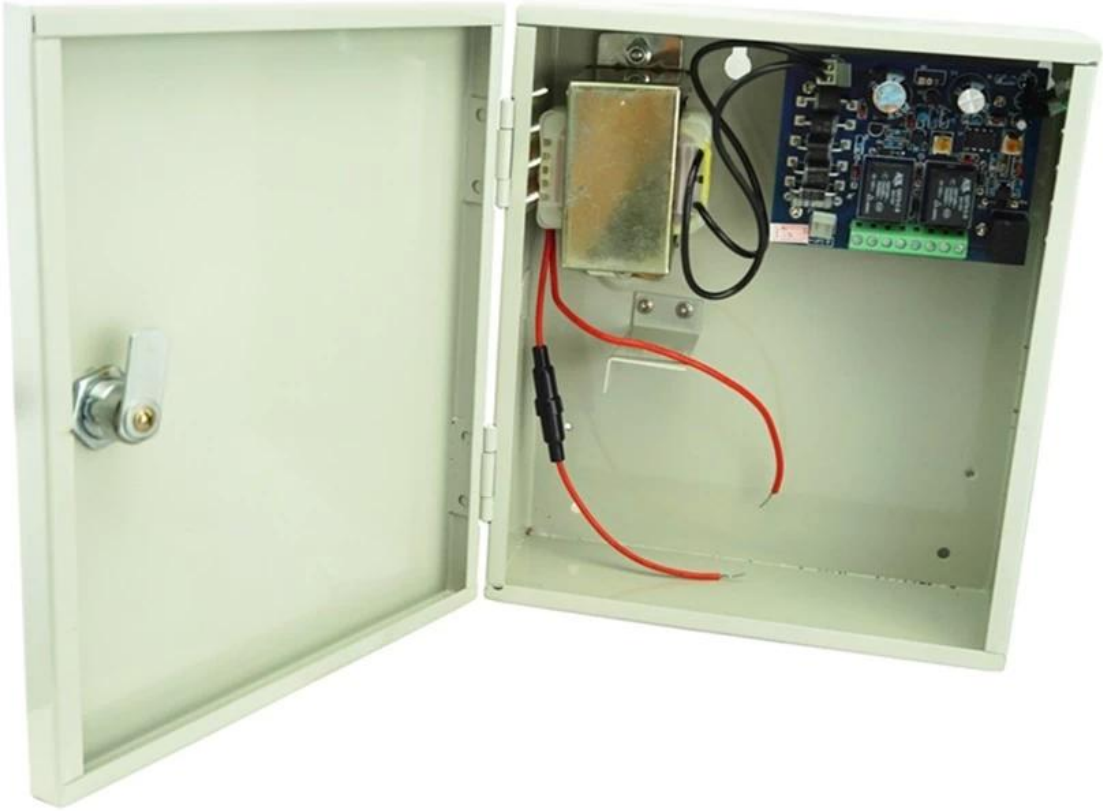

Access control switch power supply
AC 220V input,DC 12V 5A output
0~15s time relay
Double face PC board,
pure copper transformer,steel shell
Short circuit protection Anti-interference
Suitabel for access control system,
Doorphone system
Remote control function and
backup battery optional
2 years warranty, welcome OEM

Application

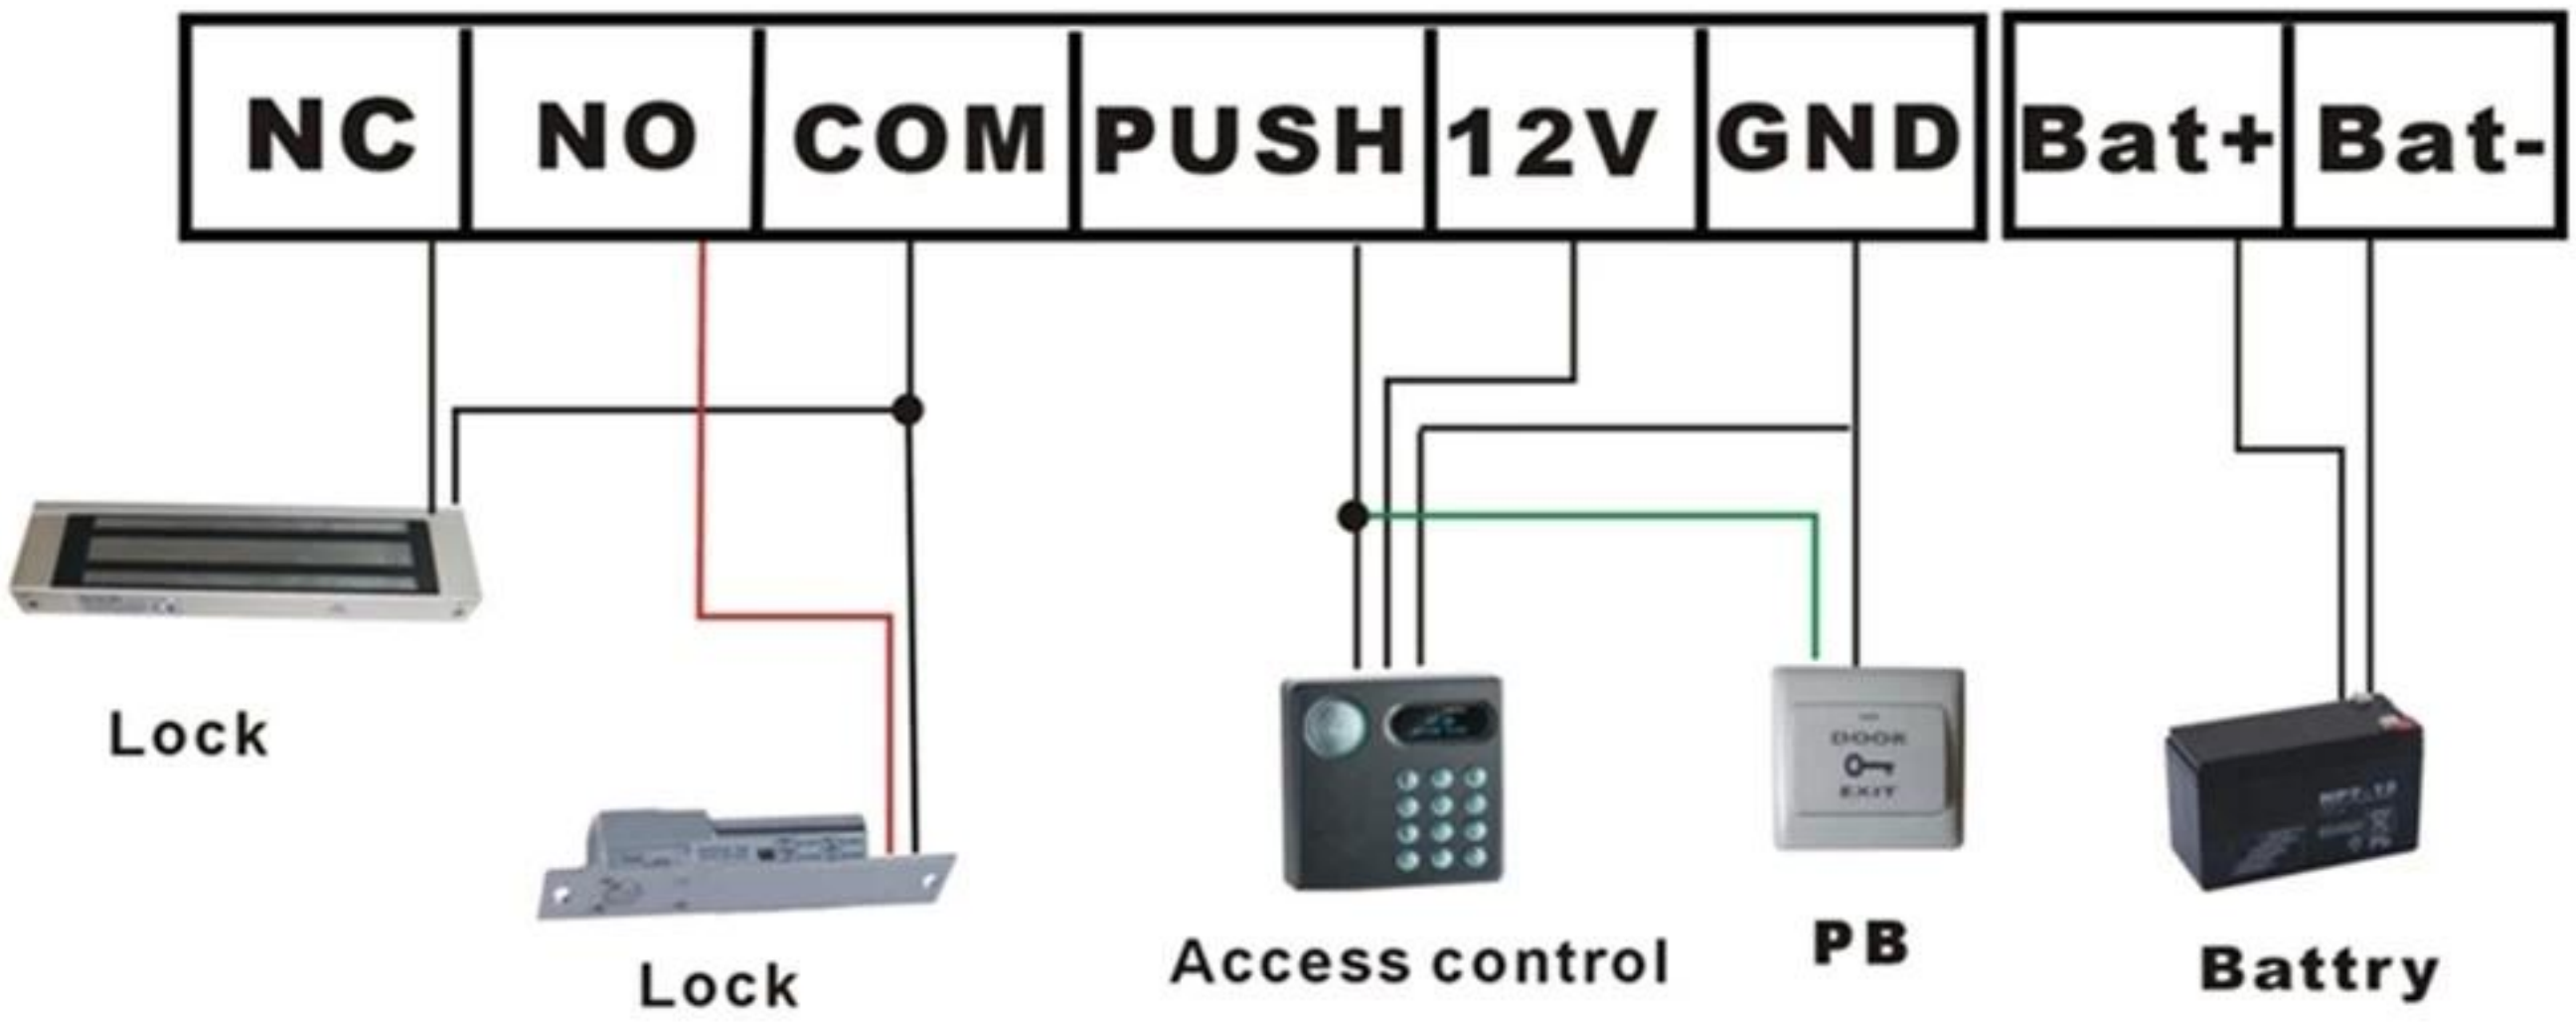

Packaging & shipping

[illegible]	
[illegible]	EA-38B DC 12V 5A [illegible]
[illegible]	10 [illegible]
[illegible]	42 * 50 * 27 ([illegible].)
[illegible]	25kg

• *Office show*

SMQT

• *Exhibition*

SMQT

2011 Brazil Fair
2012 Shenyang Fair
2013 Jinan Fair
2013 Shenzhen Fair
共赢
.....
2012 Shenyang Fair
2013 Shenyang Fair
2013 Shenzhen Fair
2015 Shenzhen Fair