

SMQT DC 12V 5A

Power supply control unit for door phone system



Model

EA-32B

Dimensions

210 × 166 × 70 (mm.)

Input voltage

AC110V ~ 240V

Input frequency

50 ~ 60Hz

Output voltage

DC 12V

Output current

5A (maximum) / 3A (recommended) OEM

Power consumption

60W

Efficiency

1%

Operating temperature

0 ~ 40°C (32 ~ 104°F)

Storage temperature

-20 ~ 60°C (-4 ~ 140°F)

Humidity

10 ~ 90% RH (non-condensing) doorphone

Weight

1.05kg (2.31lb)

PC interface

PC interface

Accessories

Accessories

1,05kg


□□□□□□□□□□□□
□□□□□□□□□□□□

-30 ° C □□□ + 60 ° c
2 □□

Appearance



Wiring diagram

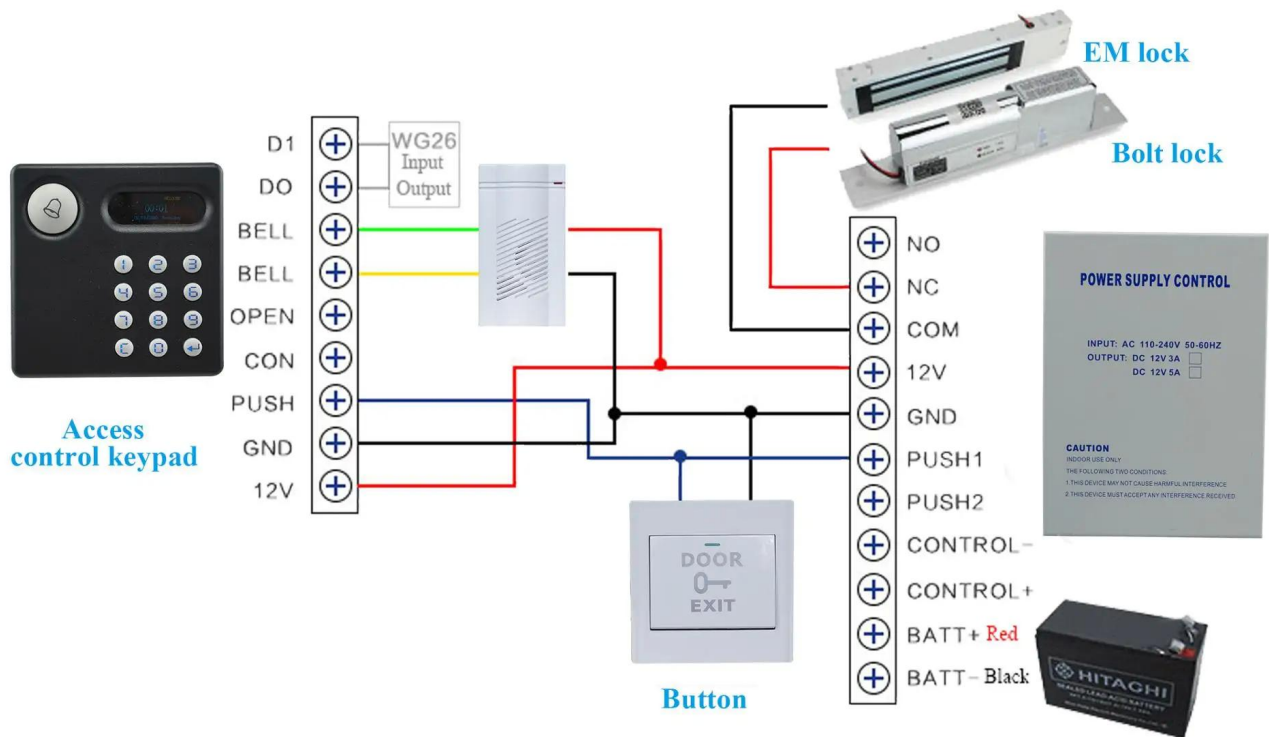

□□□□□□□□□□□□□□□□ □ □□□?

SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技

