

● Parameter



Power supply voltage	DC12V
Power supply current	≤10uA
Working current	≤15mA
Operating temperature	-10 °C ~ + 50 °C
Relative humidity	≤95% RH
Light	Visible light / LED light
Working distance	20 m2
Response time	≤1s
Output mode	Normally open (NO) / Normally closed (NC)
Frequency	433MHz / 315MHz

● Introduction



The device is connected to the power supply and the alarm system. The device is used to detect the presence of smoke or fire in the area. The device is used to detect the presence of smoke or fire in the area. The device is used to detect the presence of smoke or fire in the area.






â



● Dimension Picture

SMQT

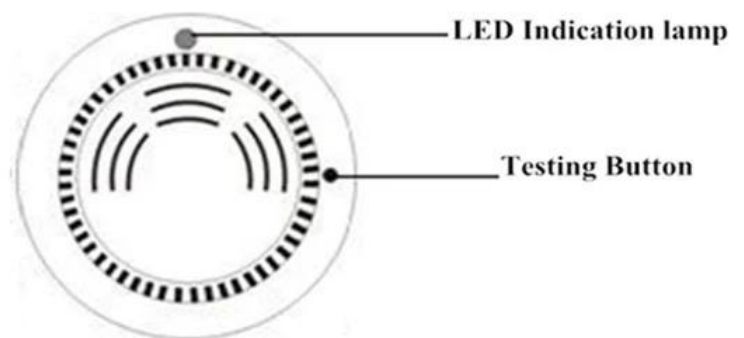

● Installations

SMQT



● Packing list



□□□□□□	108 / □□□□□
□□□□□□□□□□□□□□□□	56.6 * 46.8 * 35.5 (mm.)
□□□□□□□□□□□□	25kg

● Office



● Exhibitions



2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....