


ABS



	ABS
	EA-26
	A: 86 × 86× 20 (mm) B:86 × 86× 20 (mm) C:86 × 86× 30 (mm)
	ABS
	3A 36V DC
	A: NC / COM B: NC / NO / COM C: NC / NO / COM
	100,000
	doorphone

相对湿度	0 ~ 95%
工作温度	-20 °C -55 °C
重量	重量
尺寸	A: 0.064kg B: 0.07kg C: 0.052kg

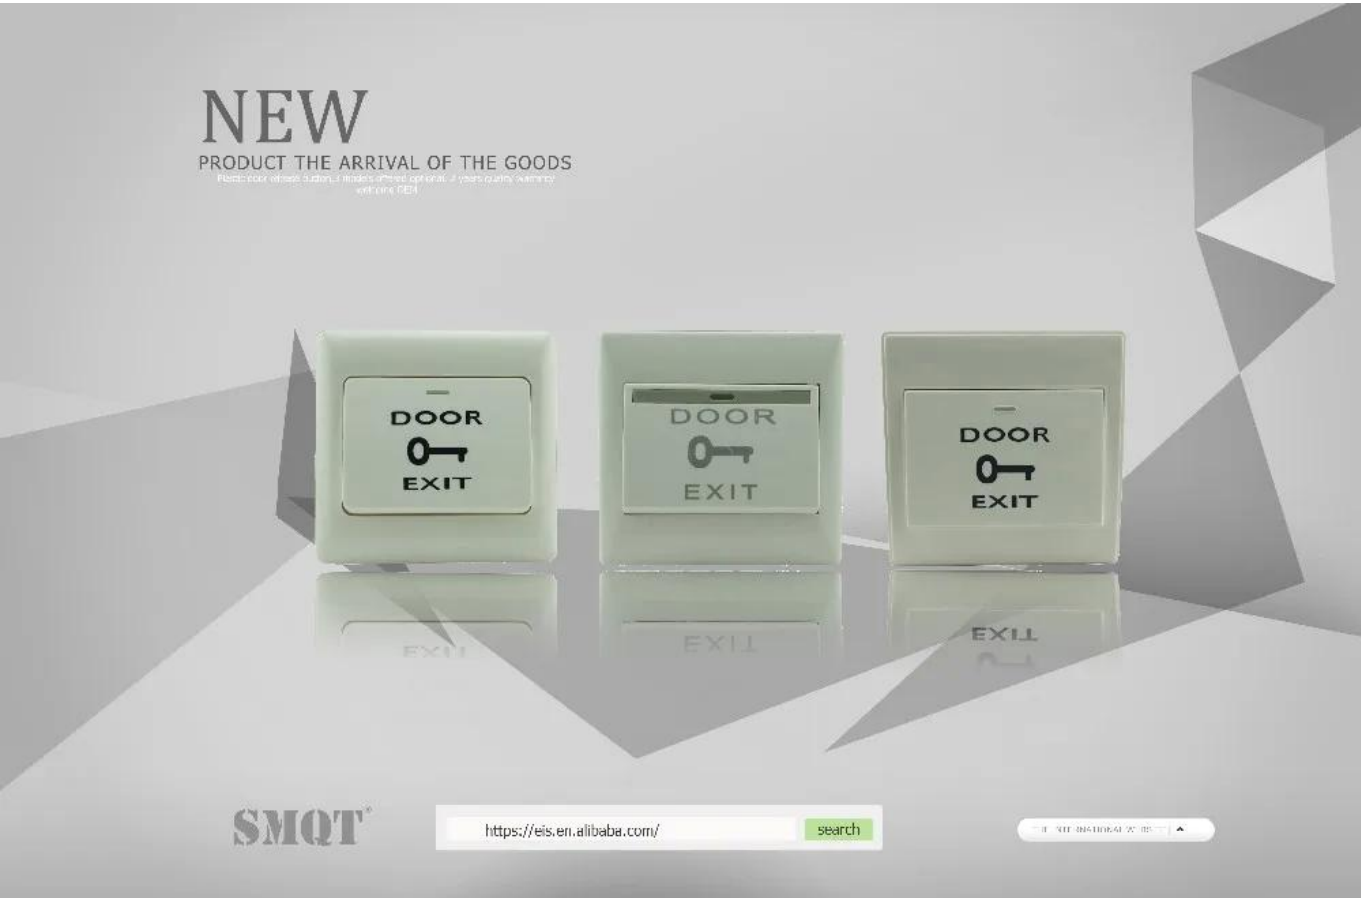


- 1.Plastic door relaese button for access control sysetm
- 2.100000 times mechanical test
- 3.Fireproof ABS material panel
- 4.3 models apperance optional
- 5.2 years warranty , welcome OEM

XXXXXXXXXX **IN-KIND**



□□□□□□□□□□□□

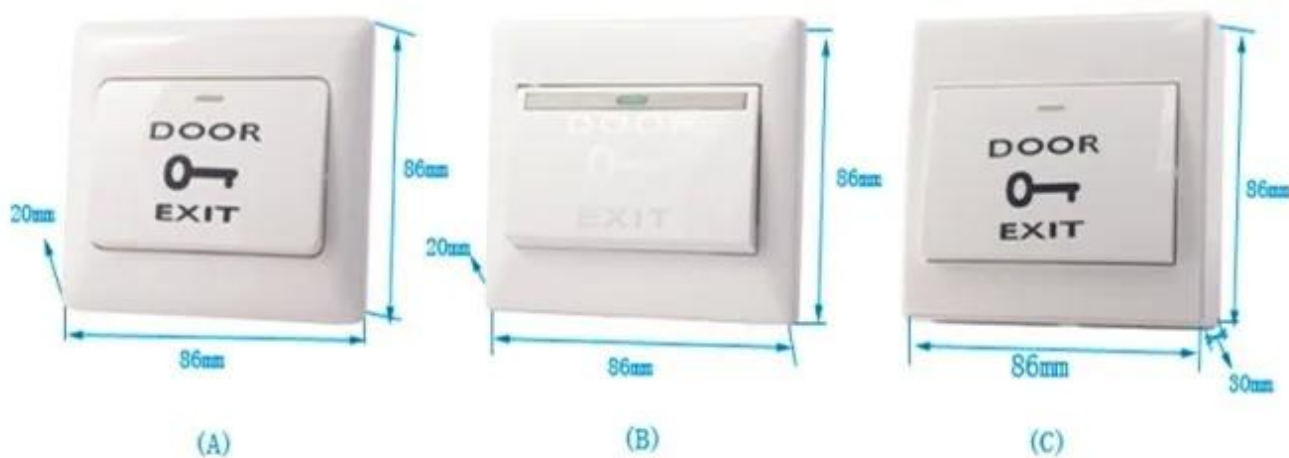

Switch power supply



Door release
button EA-26



EM Lock

Standalone
controller

Converter
(RS232 to RS485)



PC



□□□□□□ □□□□□□

OFFICE SHOW



□□□□□□



□□□□□□□□

2011 Brazil Fair



2012 shen yang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 shen yang Fair



2013 shen yang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



□□□□□□□□



PACKAGING & SHIPPING

Detection+Packing+Sealing+Finishing+International Express



Inquiry



Contract



Testing and packing



Receiving



Reply

Receive payment&Product

Delivery



[illegible]

問: 如何證明「 $\sqrt{2}$ 是無理數」？

[illegible]

Q:

1-3 10-15

Q: MOQ 如何選擇？

A: **MOQ**

QUESTION: What are the main components of a system?

注意: 本表为空白表格，请根据实际需要填写。
(本表为空白表格，请根据实际需要填写) 7-15

QUESTION: _____?

[illegible]