


Converter RS232 to RS485

- Compatible with RS-232,RS-485/RS-422 standard of EIA/TIA
- RS-232 interface, DB9(holes)
- RS-422/RS-485 interface,DB9(pin) with 6 terminals
- 300-115.2kbps transmission speed
- Twisted-pair cables as transmission medium
- With protection of $\pm 15\text{KVESD}$,RS-422/RS-485 of 600W lightning strike and surge power of each line.
- 3500VRMS isolation
- 500VDC isolation voltage



Parameter

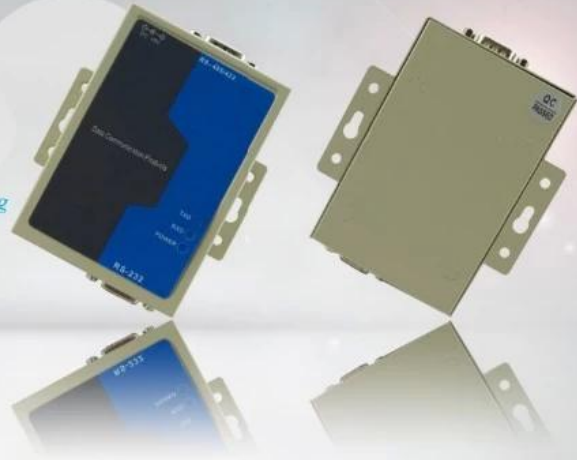

外形尺寸	90L ***** 65W 25.5H (mm)
供电电压	DC9V
接口标准	符合 EIA / TIA RS-232C, RS-485 / RS-422 标准
接口类型	RS-232C 9针 DB9 母头接口 RS-422 / RS-485 DB9 9针公头接口
传输速率	300-115.2KBPS
接口信号	TXD RXD 差分信号
接口数量	2
浪涌保护	RS-232 $\pm 15\text{KVESD}$ 浪涌保护 RS-422 / RS-485 浪涌功率 600W
绝缘电压	3500VRMS
隔离电压	500VDC 绝缘电压
精度	5% 精度 95%
工作温度	0 °C ~ 50 °C

Introduction



本转换器采用 RS232C 接口，通过 2 根双绞线 RS485 RS422 接口，实现 RS232C 与 RS485/RS422 的转换。DC 供电，工作温度 0 °C ~ 50 °C。



• Feature

SMQT



Converter RS232 to RS485

Interface compatible with EIA / TIA RS-232C,
RS-485 / RS-422 standard

Electrical Interface:

RS-232C interface DB9 female connector port,
RS-422/485 Interface DB9 female connector

Transmission medium: shielded twisted pair wire

300-115.2KBPS transmission rate

Lightning surge protection

Working Humidity: 5%~95%


Environment temperature: 0 °C ~ 50 °C

Net weight: 0.62kg

Welcome OEM and 2 years quality warranty

• *Installation*

SMQT

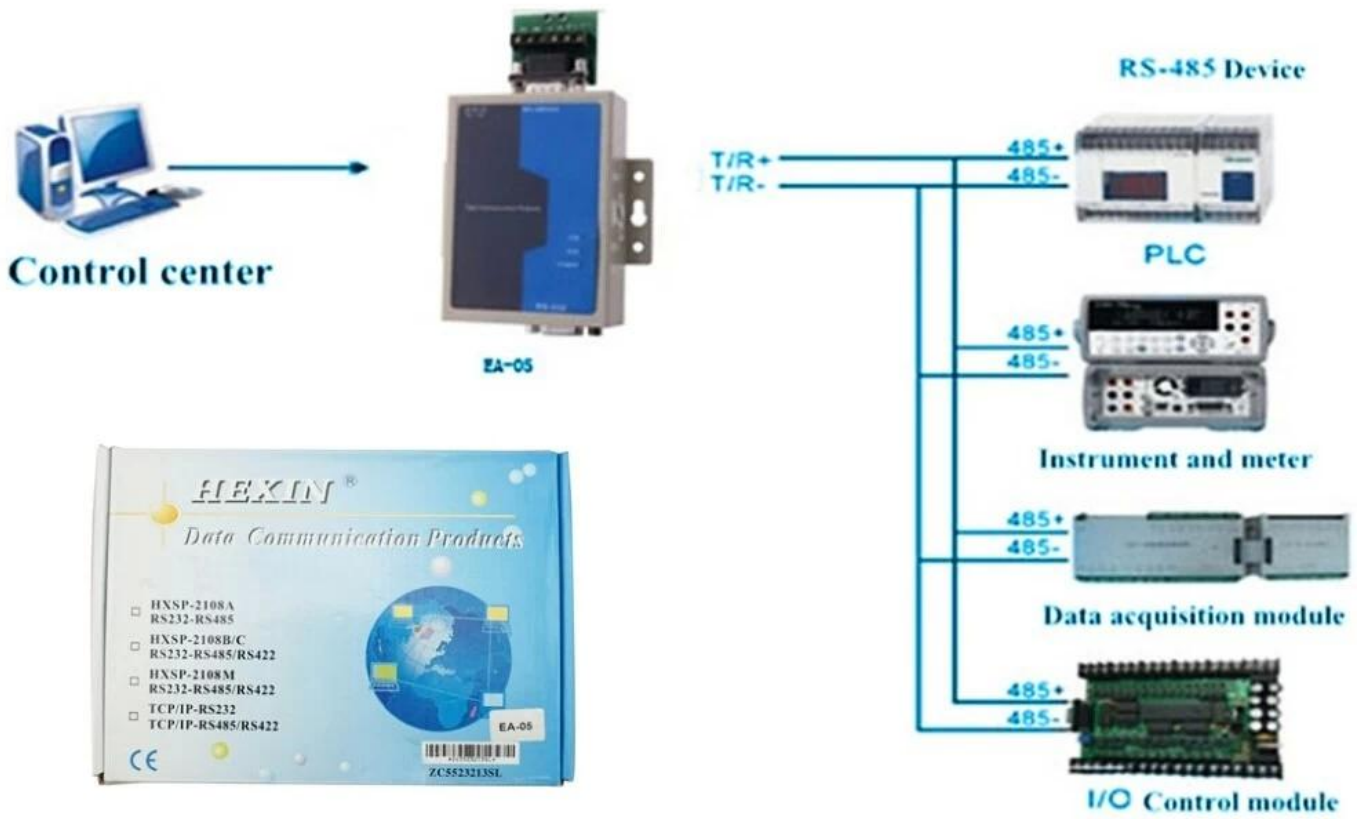

• Show case

SMQT®



• Packaging & shipping

SMQT®



• *Office show*

SMQT®



• *Exhibition*

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....