

# Shutter door magnetic contact sensor

NO/NC code mode optional

60±10(mm) gap distance

Mode A&B: Max voltage≤100VDC


Max current≤500mA

Mode C: Wireless 433mhz(1527),12V DC

Alloy-zn and alloy-al Material

Suitable for shutter door

Wieght: A:210g B:280g C:290g

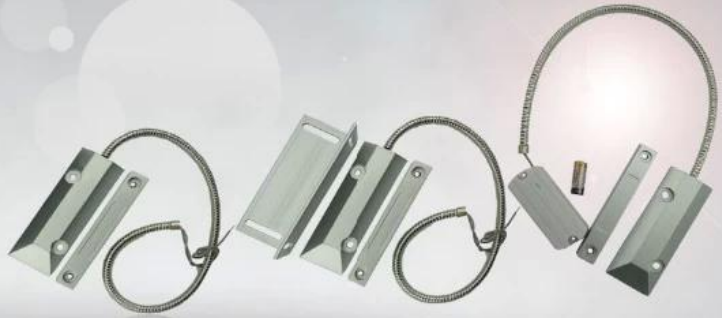

## Parameter



Model	EB-137A / B
Dimensions	106L * * * * * 38W 10H (mm)
Material	Alloy-zn / Alloy-al
Gap distance	60 ± 10 (mm)
Max voltage	≤100VDC
Max current	≤500mA
Power	≤10W
Mode	NO/NC code mode optional B
Weight	254g / 154g

## Introduction



commercial DETCTOR

# PRODUCT PICTURE



• *Feature*


**SMQT**

# PRODUCT FEATURE

EB-137A

EB-137B

EB-137C

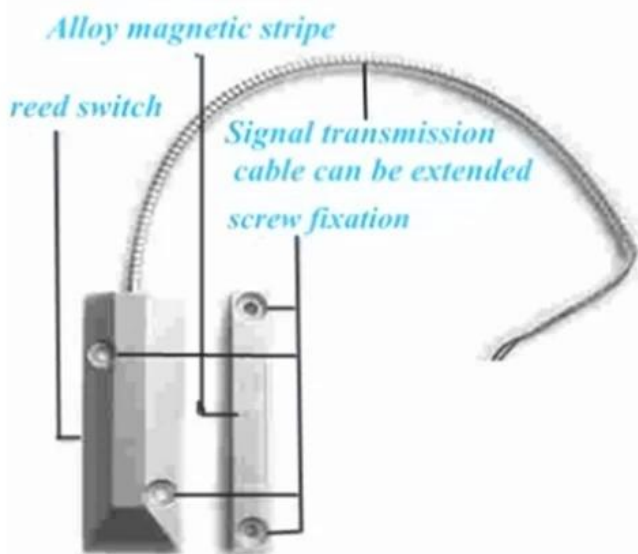



## • Packaging & shipping

SMQT®



## • Office show

SMQT®



## • Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....