

Wired magnetic contact sensor

NC/NO mode optional


20±5(mm) gap distance

MAX voltage≤100V DC,MAX current≤500mA

Suitable for wooden door or window

White/Brown color optional

12g weight

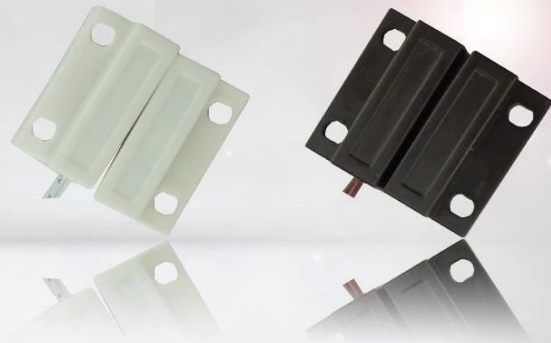

• Parameter

SMQT®

□□□□□□□□□□	
□□□□□□□□□□	□□□□□□□□□□□□□□□□□□□□
□□□	EB-133
□□□□	27 × 41 × 8 (mm)
□□□□□□□□	NO / NC (□□□□□□□□□□□□)
□□□□□□□□	20 ± 5 (mm)
□□□□□□□□□□□□□□	≤100V□□
□□□□□□□□□□□□	≤500mA
□□□□□□□□□□	≤10W
□□	□□□□□□□□ / □□□ (□□□□□□□□□□□□)
□□□□□□□□	□□□□□□□□□□□□□□□□□□
□□□□□□	□□□□□□□□□□□□ ABS □□□□
□□□□□□□□□□□□□□□□	-10 °C ~ 50 °C
□□□□□□□□□□□□	12g

• In-kind shooting

SMQT®



• *Feature*

SMQT



EB-133

Dimension:27×41×8(mm)

Fireproof ABS material shell

NC/NO mode optional(NO mode need OEM)

Max voltage≤100VDC, Max current≤500mA

Suitable for wooden door or window

White/Brown color optinal

12g weight

2 years quality warranty,welcome OEM

• **Packaging & shipping**

SMQT

	□□□□□□□□□□□□□□
□□□□□□□□□□□□	□□□□□□□□□□□□□□□□□□□□□□□□ EB-133
□□□□□	1,600 □□□□□□□□□□□□
□□□□□□□□	38 * 30 * 30 (□□.)
□□□□□□	20kg



WE LOGISTICS



• Office show

SMQT



• Exhibition

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair