

Shutter door magnetic contact sensor

NO/NC code mode optional

60±10(mm) gap distance

Mode A&B: Max voltage≤100VDC

Max current≤500mA

Mode C: Wireless 433mhz(1527),12V DC

Alloy-zn and alloy-al Material

Suitable for shutter door

Wiegth: A:210g B:280g C:290g

SMQT



• Parameter

SMQT

产品名称	EB-137
规格	106 × 38 × 10 (mm)
材质	NO / NC (可选)
安装距离	60 ± 10 (mm)
工作电压	≤100V DC 模式 C: 12VDC
工作电流	≤500mA
功率	≤10W
重量	模式 A: 210g 模式 B: 280g 模式 C: 290g
无线频率	433MHz (1527chip)
无线距离	& lt; 100m

• In-kind shooting

SMQT



• Feature

SMQT


EB-137A



EB-137B



EB-137C

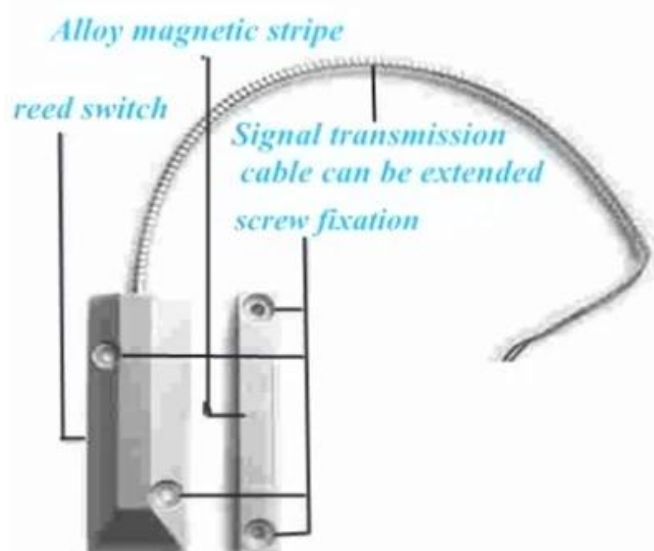

• *Packaging & shipping*

SMQT

包装规格及重量	
包装规格	
数量	50 个/箱
包装尺寸	38 * 30 * 30 (mm.)
重量	10 ~ 17kg



• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

