


1. 系统架构：系统采用 TCP / IP 协议进行通信，通过 rfid 识别设备，通过 ip 地址进行网络通信。



Single door access controller

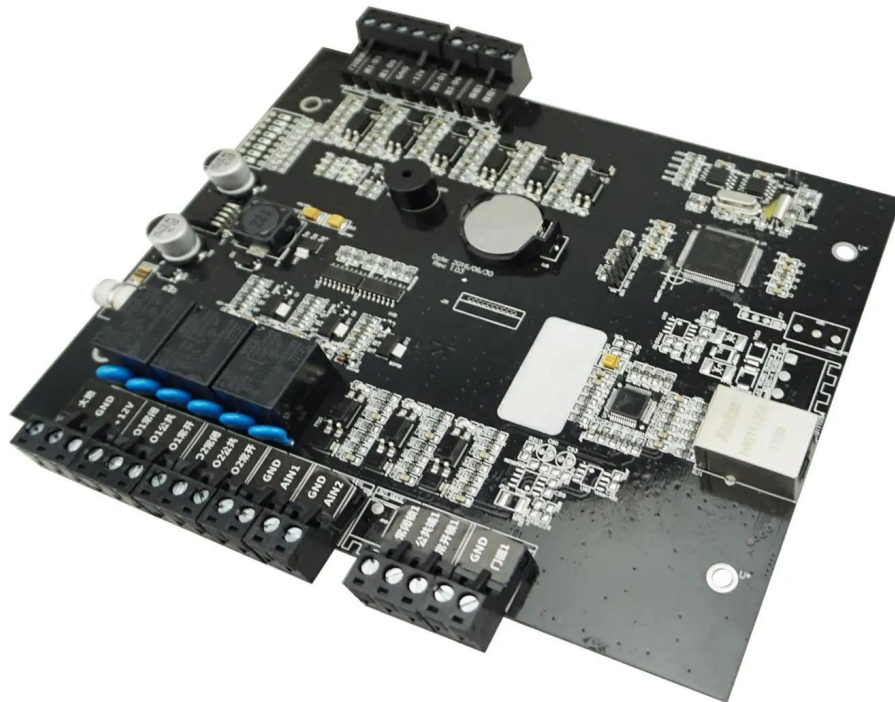


EA-811

产品名称:	EA-811
产品型号:	EA-811
工作电压:	9 ~ 14V DC
工作电流:	<350mA
存储容量:	capacity 20,000
接口类型:	10pin 00,000 (00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000)
接口数量:	10pin 00,000 (00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000)
接口规格:	10pin 00,000 (00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000)
接口材料:	10pin 00,000 (00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000)
接口颜色:	10pin 00,000 (00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000)
接口尺寸:	10pin 00,000 (00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000)
接口重量:	10pin 00,000 (00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000)
接口寿命:	10pin 00,000 (00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000)
接口认证:	10pin 00,000 (00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000)
接口备注:	10pin 00,000 (00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000, 00,000)

□□□□□:	□□□□□ PCB
□□:	□□□□
□□□□□□□:	0.7kg
□□□□□□□□□□□:	□□□□□□□□□□□□□□□□
□□□□□□□□□□□:	□□□□□□□□□□ 2 □□
OEM:	□□□□□□□□□□□ OEM

□□□□□□□□□□□□□□□□ EA-811 □□?

Compatible accessories introduction

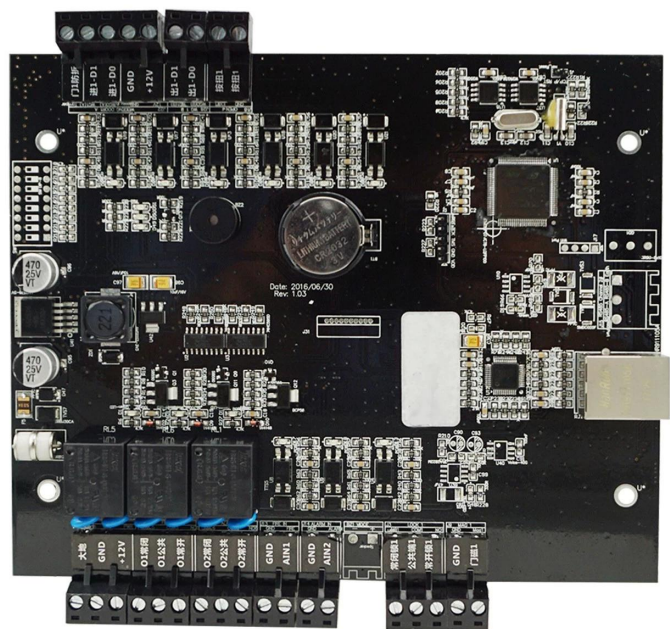

Card reader× 2



Lock×1



Button× 1




Door sensor×1





siren ×1


Wire diagram

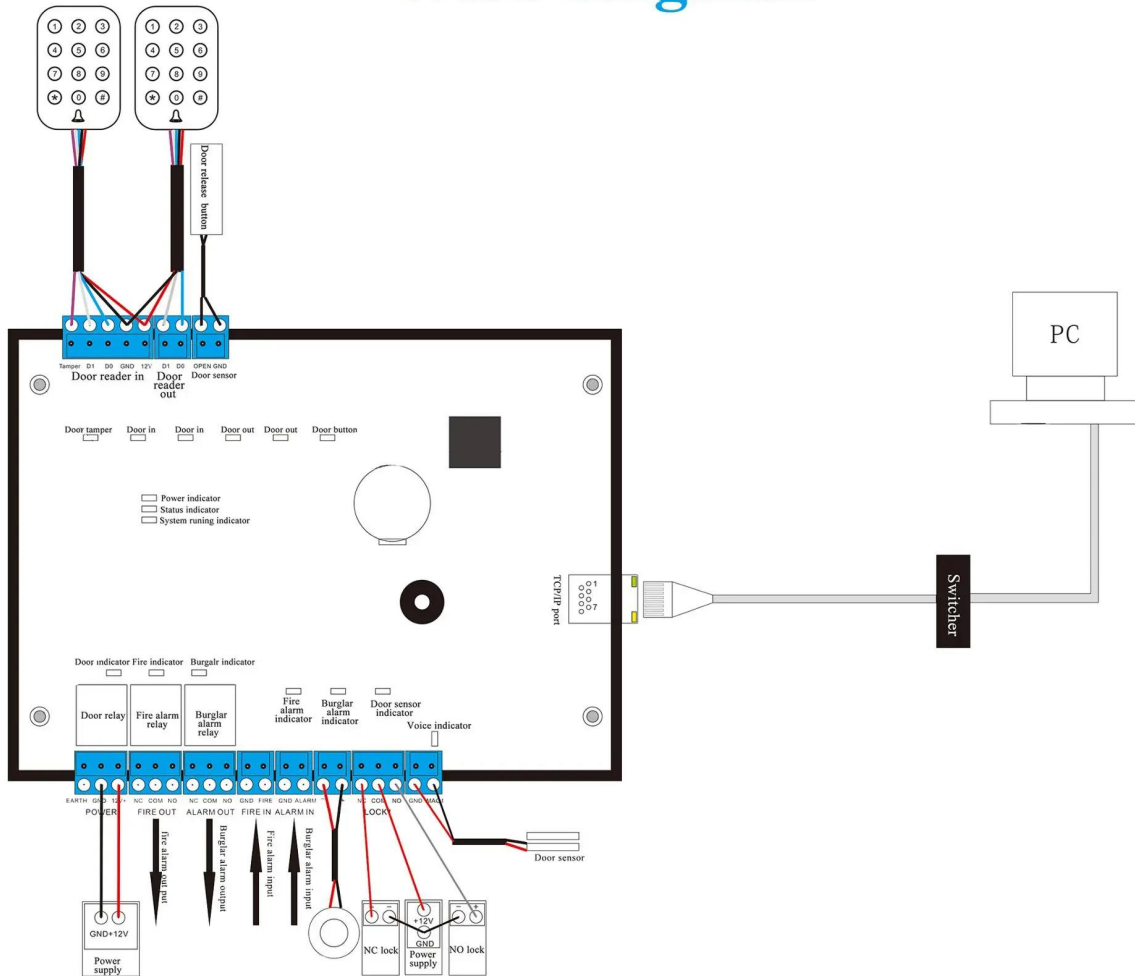

PC software

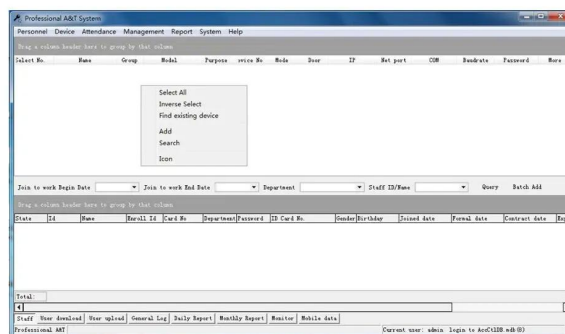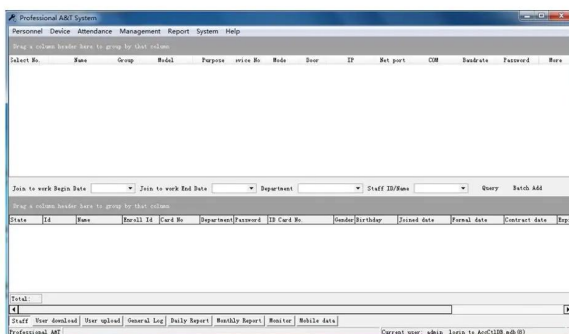

Software SDK free offered

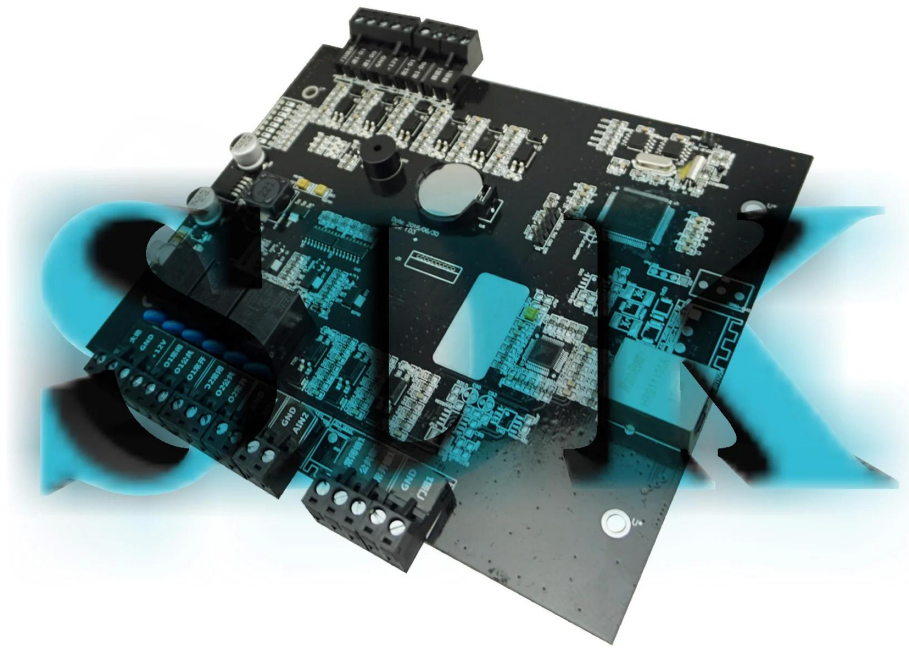


Optional accessories



Metal box power supply

Standard package



Single package size: 248*165*30mm

The number of full boxes: 46

FCL weight: 15kg

FCL size: 470*383*420mm

Welcome OEM

□ □

SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技

