

WG26 / 34 IC (13.56MHz)



EA-61

IC	WG26 / 34 IC (13.56MHz)
Model	EA-61
Power	DC 12V
Current	< 100mA
IC card	IC card (13.56MHz)
WG26 / WG34	WG26 / WG34 (13.56MHz)
Range	5 ~ 15cm
Material	> 80 (ABS)
IP66	IP66 (Waterproof)
Size	95L * 95W 20H (mm)
Weight	60g
Power supply	12V + (GND) / GND (D0) / D1 (LED) / WG (WG)
IC Card	IC Card
Material	ABS + Plexiglass + ABS + PCB
Weight	0.3kg
Package	2
OEM	OEM

□□□□□□□□□□ **EA-61** □□?



1. Waterproof door access control IC Card reader with WG26/34 adjustable

2.Power supply DC 12V

3. Working current < 100mA

4. Output load 2A 12V

5.Card type IC 13.56Mhz (Mifare card)

6. Reading distance 5~15cm

7.WG format WG26/34 adjustable

8.6 wires: +12/GND/D0/D1/LED/WG

9.Suitable for all kinds of access control system

10. Working temperature $-20^{\circ}\text{C} \sim 60^{\circ}\text{C}$

11.2 years warranty , welcome OEM

👍👍👍👍👍 EA-61 👍👍 LIKE?



EA-61?




EA-61



Wiring diagram




Card reader EA-61

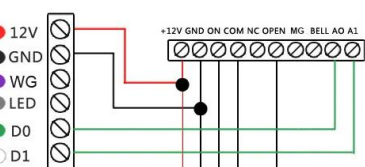

Access control keypad



Access control power supply



Door release button



Lock

How to adjust WG26/WG34 output?

WG34



Connect the purple and black wires of the card reader to the controller's GND connector.

WG26



Do not connect the card reader's purple wire.

Application site



Apartment



Villa



Home



School



Hospital



Document Room

SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技

