


CPU IP66
 Water Access Control
 System



	CPU IP66 Water Access Control System
	96mm * 96mm * 22mm
	9VDC-16VDC
	≤ 120mA
	13.56MHz
	& lt; 0.1 ()
	Wiegand26
	3.5cm-5.5cm
	& lt; 100
	, ± 15v
	0 °C ~ 60 °C
	-20 °C ~ 70 °C

?

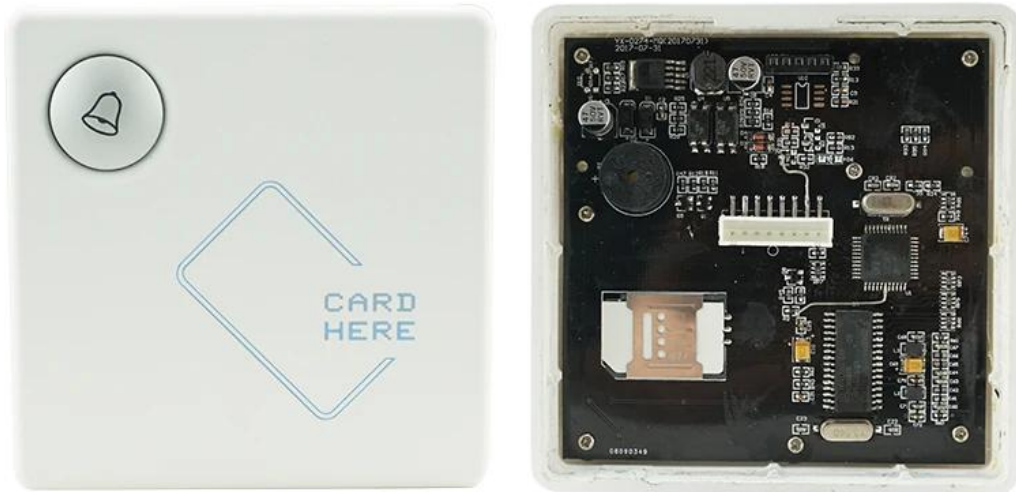

Support CPU SHC1112 card

Support the ISO14443a protocol

Card number and key can be user-defined

Fully sealed design epoxy seal and waterproof type

Wiegand 26 communication interface, 26-122 bit output

□□□□□□□□ IN-KIND



卡扣 7000

CPU Card Reader



GND	9-16V DC	D0	D1	Buzzer	LED	RS232-TX	RS232-RX
-----	----------	----	----	--------	-----	----------	----------

Can work with different access control accessories :



Power Supply



EM Lock



Bluetooth Door Button



Dual Doors Access Control



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技




SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技




SMQT
铭汗科技





□□□□□



□□□□□□□□

2011 Brazil Fair



2012 shen yang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2017 Shenzhen Fair



2012 shen yang Fair



2013 shen yang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair





QUESTION

QUESTION

1

-3

A: 請問貴公司 目前 **MOQ** 訂定標準是依照什麼標準訂定

客戶: 請問貴公司目前訂定標準是依照什麼標準訂定?

客戶: 請問貴公司目前訂定標準是依照什麼標準訂定
(目前訂定標準是依照什麼標準訂定) 目前訂定標準是依照什麼標準訂定 **7-15** 個月

客戶: 請問貴公司目前訂定標準是依照什麼標準訂定?

客戶: 請問貴公司目前訂定標準是依照什麼標準訂定
目前訂定標準是依照什麼標準訂定
目前訂定標準是依照什麼標準訂定