

Wiegand 26/34 Rfid Reader

□ □



card reader

MQ-712B

型番:	IP 67 2D wiegand 34/26 1D rfid
型番:	MQ-712B
周波数:	13.56MHz IC (13.56MHz)
電圧:	DC12V
電流:	30 ~ 180mA
対応WG:	WG34 2D wiegand WG26, WG34, WG66, 1D rfid
対応IC:	MifareS50 / S70 / DESFire / NTAG213 / NTAG216 / ultralight / FM1204 / FM1208
対応CPU:	FEILICA / HID ICLASS
距離:	0 ~ 3cm
動作温度:	<80m (動作温度範囲)
IP:	IP67
サイズ:	120 * 80 * 20 (mm.)
重量:	7 g
電源:	12V + (GND) / D0 (D1) / Beeper (LED) / WG26 (動作温度)

物料名称:	物料名称
物料:	物料 + 物料 + 物料 PCB
物料名称	物料名称 + 物料名称
物料:	0.45kg
物料名称:	物料名称 1 个
OEM:	物料名称 OEM

MQ-712B 物料名称?

Size



Appearance



What type card it can read?




Wire port introduction



- Red: DC 12V+ input
- Black: GND
- White: Wiegand D1
- Green: Wiegand D0
- Purple: Buzzer
- Gray: LED
- Yellow: WG adjustable wire

Package list

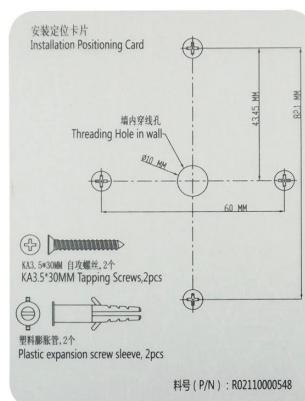

□□□□□□□□□□□□□□□□ ?

