

NEW

PRODUCT THE ARRIVAL OF THE GOODS

Appearance of the patent , Has the opposite of current protection , Import PC material , heat resistance , corrosion resistance is strong , free manage software , 3 years quality warranty welcome OEM



SMQT®

<https://eis.en.alibaba.com/>

search

THE INTERNATIONAL WEBSITE | ▲

| LED 尾燈 |                      |
|--------|----------------------|
| 產品名稱   | LED 尾燈 8             |
| 型號     | EB-162               |
| 尺寸     | 120 * 126 * 107 (mm) |
| 工作電壓   | DC 12 ~ 30V          |
| 工作電流   | < 40mA (工作電流)        |
| 聲音     | 105db                |
| 數量     | 8 個 (每個包裝)           |
| 重量     | < 1.3                |
| 工作溫度   | -20 °C ~ 50 °C       |
| 材料     | PC 塑料                |
| 光源     | LED 光源               |
| 濕度     | 95% RH               |
| 溫度範圍   | -20 °C ~ 60 °C       |
| 包裝     | 包裝                   |
| 重量     | 0.4kg                |

緊急事態に備えて、あなたの車に緊急フラッシュライトを装着してください。 **EB-162** 緊急フラッシュライトは、あなたの車を安全に保ち、他のドライバーに警告を発します。



1.Wired outdoor emergency flash strobe siren

2.DC 12V~30V power supply

3.Operating current $\leq$ 40mA

4.Sound pressure 105db


5.8 sound and flash light models are adjustable freely

6.2 years warranty , welcome OEM


緊急事態に備えて、あなたの車に緊急フラッシュライトを装着してください。 **IN-KIND**





□□□□□□□□□□□□□□



Front




Side



VOLUME



Turn "-" reduce the volume  
Turn "+" increase the volume



| Code setting | Operating Voltage DC12V, switch "NO" to "g" |                                                    |             |
|--------------|---------------------------------------------|----------------------------------------------------|-------------|
| Switch 123   | Sound species                               | Pulse description                                  | DB level    |
| LLL/000      | 119                                         | High level 180us, low level max:180us, min:80us    | 116(+/-2db) |
| HHL/110      | Last "di" 0.7hz                             | High level 85us, low level 890us                   | 110(+/-2db) |
| LHL/010      | Sounding "da"                               | High level 115us, low level 400us                  | 114(+/-2db) |
| HLL/100      | High sound 119                              | High level 100us, low level max:1150us, min:360us  | 115(+/-2db) |
| LHL/011      | Normal 120                                  | High level 180us, low level max:2090us, min:1620us | 116(+/-2db) |
| HLL/101      | High sounding "di"                          | High level 95us, low level 930us                   | 111(+/-2db) |
| LHL/001      | 120 with fast                               | High level 180us, low level max:2090us, min:1620us | 114(+/-2db) |
| HHL/111      | High sound 120 with fast                    | High level 140us, low level max:1100us, min:950us  | 116(+/-2db) |

**8 Types**  
Voice & light combination  
freely adjustable



*Suitable for all kinds of emergency situation!*



□□□□□□□□□□□□□□□□



□□□□□□□□□□□□□□□□□□□□□□□□□□□□



**SMQT**  
铭汗科技



**SMQT**  
铭汗科技



**SMQT**  
铭汗科技



**SMQT**  
铭汗科技



**SMQT**  
铭汗科技



**SMQT**  
铭汗科技



**SMQT**  
铭汗科技



**SMQT**  
铭汗科技




**SMQT**  
铭汗科技



**OFFICE SHOW**



000000

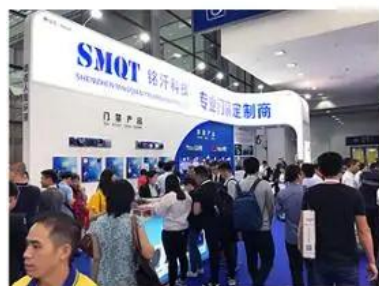

00000000

2011 Brazil Fair



2012 shen yang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2017 Shenzhen Fair



2012 shen yang Fair



2013 shen yang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair







## PACKAGING & SHIPPING

Detection+Packing+Sealing+Finishing+International Express



