

• Parameter

SMQT®

□□□□	□□□□□□□□□□□□□□ PIR □□□□□□
□□□	EB-187
□□□□:	107 × 59 × 39.5 (mm)
□□□□□□□□□□□□□□□□□□□□:	3V DC (□□□□□□□□□□ 2AA)
□□□□□□□□□□□□□□:	≤25uA
□□□□□□□□□□□□:	≤15mA
□□□□□□□□□□□□□□:	12m
□□□□□□□□□□□□□□:	110 °
□□□□□□□□□□:	315MHz / 433MHz (2,262 □□□□□□□□□□□□) (□□□□□□□□□□□□)
□□□□□□□□□□:	200 □□□□ (□□□□□□□□□□□□□□)
□□□□□□□□□□□□□□□□:	□□□□□□□□□□ 2.2m
□□□□□□□□□□□□□□:	□□□□□□□□
□□□□□□:	□□□□□□□□□□□□□□ ABS □□□□


• Introduction

SMQT®




PIR sensor



Side view

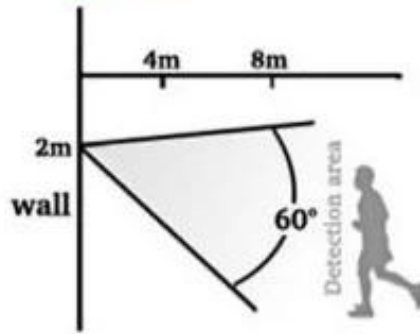

Overhead view

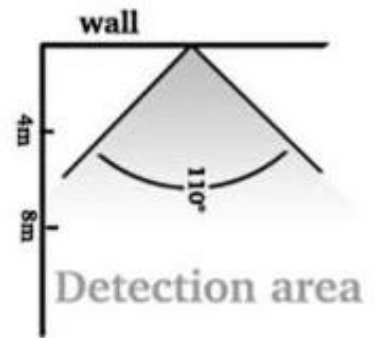

Detecting Area View

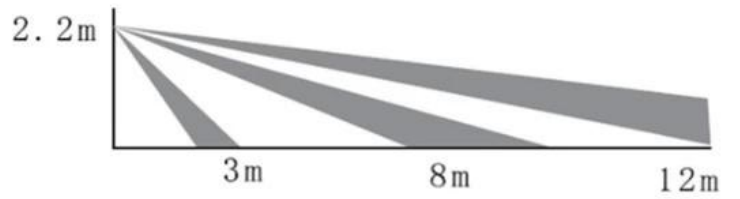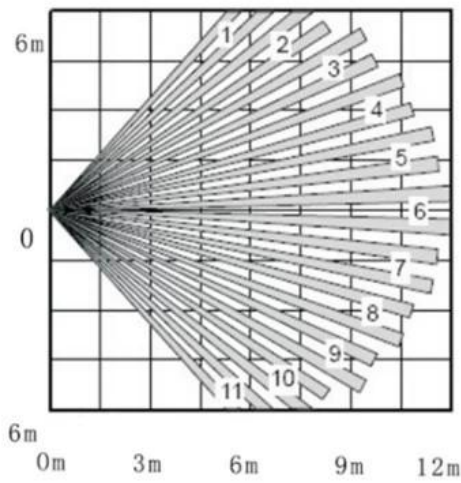

Side View

• *Packaging & shipping*

SMQT



● *Office show*

SMQT®



● *Exhibition*

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....