

Wireless door sensor

Fireproof ABS shell
DC 12V power supply
Wireless frequency 315Mhz/433Mhz optional
Wireless signal transmisson distance max 100m



•Parameter





Parameter	
Model	EB-130
Power supply	12V
Dimensions	40 ± 5 (mm)
Frequency	315MHz / 433MHZ
Transmission distance	≤100m

•Introduction




The EB-130 wireless door sensor is a fireproof ABS shell, DC 12V power supply, wireless frequency 315Mhz/433Mhz optional, and wireless signal transmisson distance max 100m. It is a high-quality, reliable, and easy-to-use device for home and commercial security.

PRODUCT PICTURE

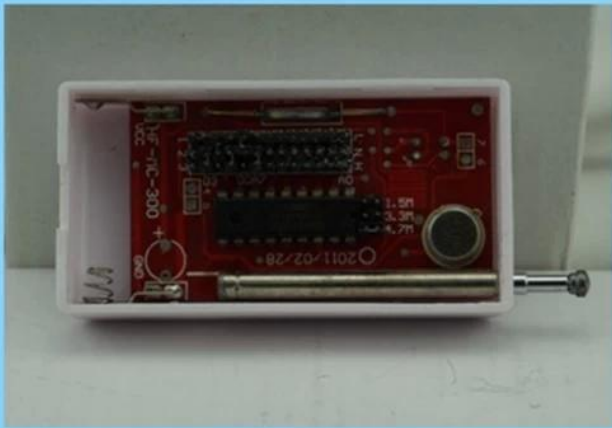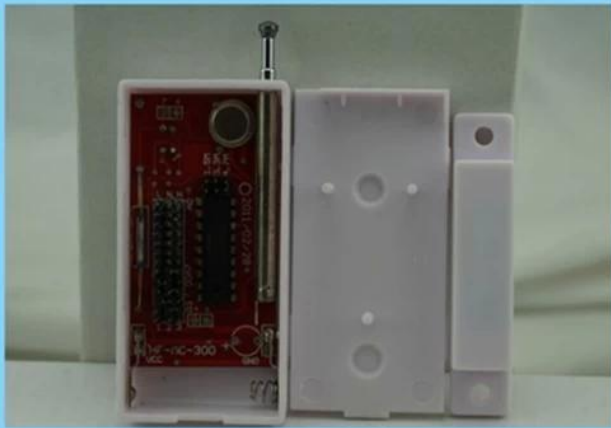

PRODUCT FEATURE

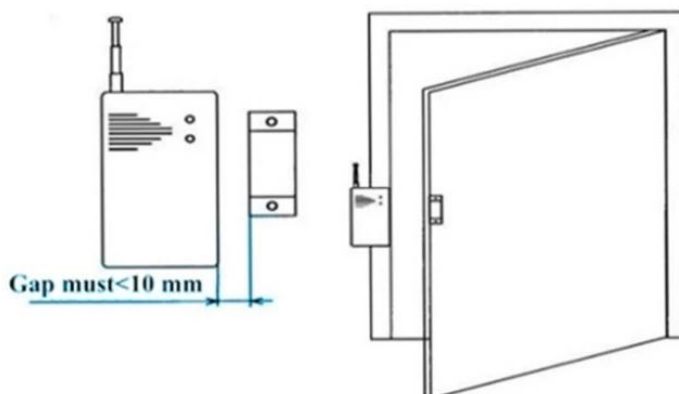

Function: To detect the door, window, drawer, ambry is illegally open or move.

Features: Triggered under the armed state, there will be alarm signal to send to alarm host.

Installation: installed at the closed door and drawer. (PS: Detectors and magnetic stripe is opposite, the spacing of less than 1 cm)



Installation Instruction

- 1、Emitter and magnetic stripe with two-side glue stick on the door and door frame, as far as possible between closed without gap
- 2、Suitable for wood door/window or glass door/window.

• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

