

model	ABE
algılama mesafesi	Kapalı Alan: 150m 300m 450m 600m 750m Dış mekan: 50m 100m 150m 200m 250m (isteğe bağlı)
çalışma gerilimi	13.8 ~ 24VDC 11 ~ 28VAC
çalışma akımı	40-65mA
gösterge hızı	50 ~ 700m / sn
Yıkım önleyici çıktı	NC
Çevre sıcaklığı	-20°C~ + 50 °C
Alarm çıkışı	NO / NC
Seviye ayarı	180 ° ± 90 °
Vertocal düzenleme	± 10 °
renk	siyah
malzeme	PC reçinesi

Fotoelektrik sensörler kızılötesi lazer ışını daireniz için su geçirmez güvenlik kızılötesi ışınlarıdır. Eviniz için güvenlik.

Mühürlü entegrasyon yapısı karma ortamda çalışma yeteneğine sahiptir.

Sis veya sert hava koşullarıyla karşı karşıya kalan dedektör, hassasiyeti otomatik olarak düzenler (AGC devresi).

Yatay / dikey optik açığı ayarlamak ve kalibre etmek kolaydır.

Dahili entegre optik teleskoplar, profesyonel anti-parazit ceketini kullanın.



Yıldırım karşıtı devre tasarımı.

Yüksek güçlü kızılötesi alıcı tüpleri, düşük güçlü dijital.




● Dimesion Picture

SMQT

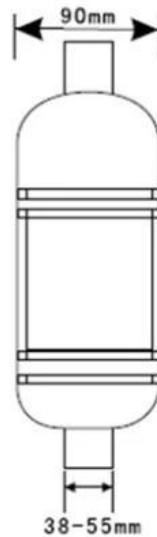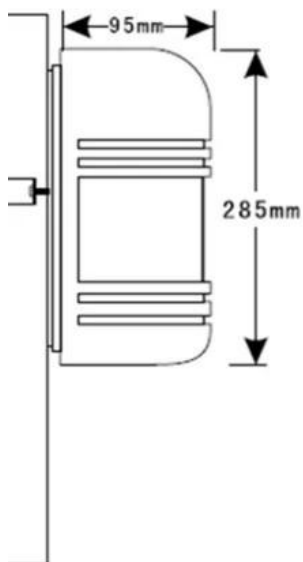

● Installations

SMQT

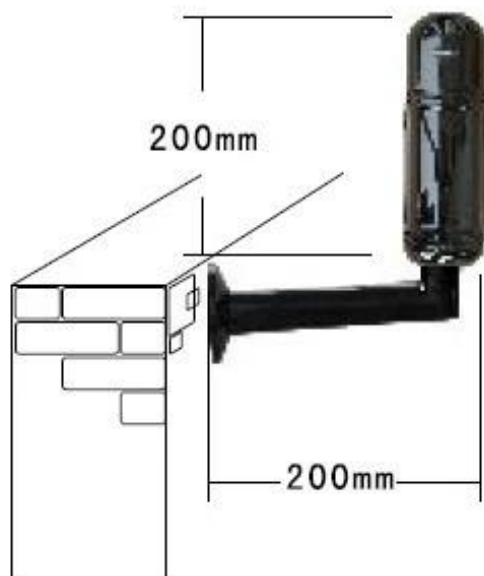

Optional Bracket Accessories: T Bracket

T-200 T-100
200×120mm 100×120mm

L Bracket


80×75mm







I Bracket

I-100
100mm
I-200
200mm



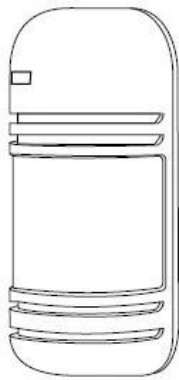

Housing

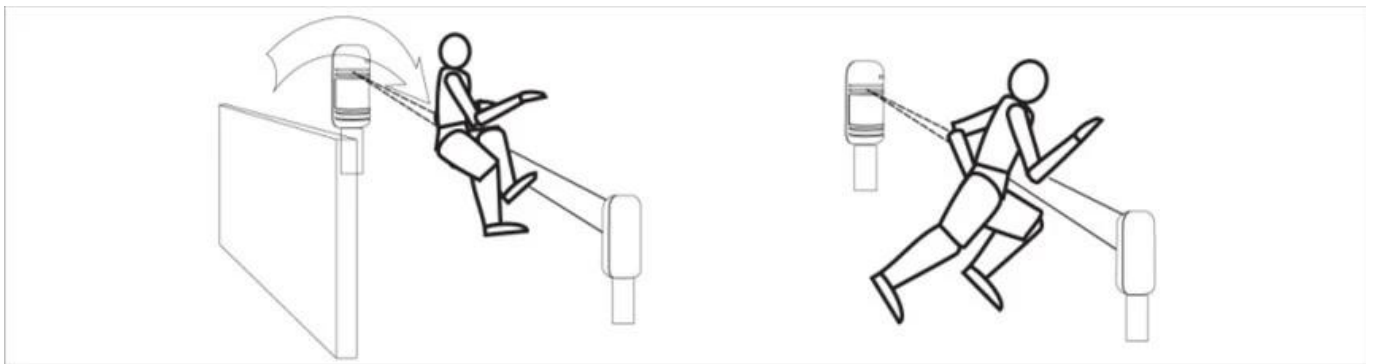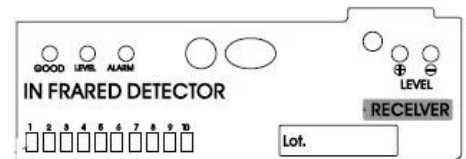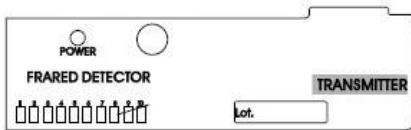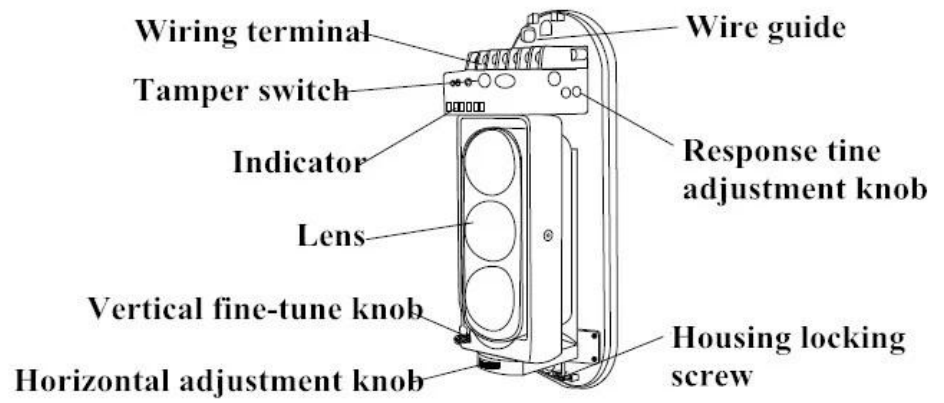

High speed

Fast running (6.9m/s)

Fast walking (1.2m/s)

Normal walking (0.7m/s)

Slow walking (0.4m/s)




● Packing list

SMOT



ê

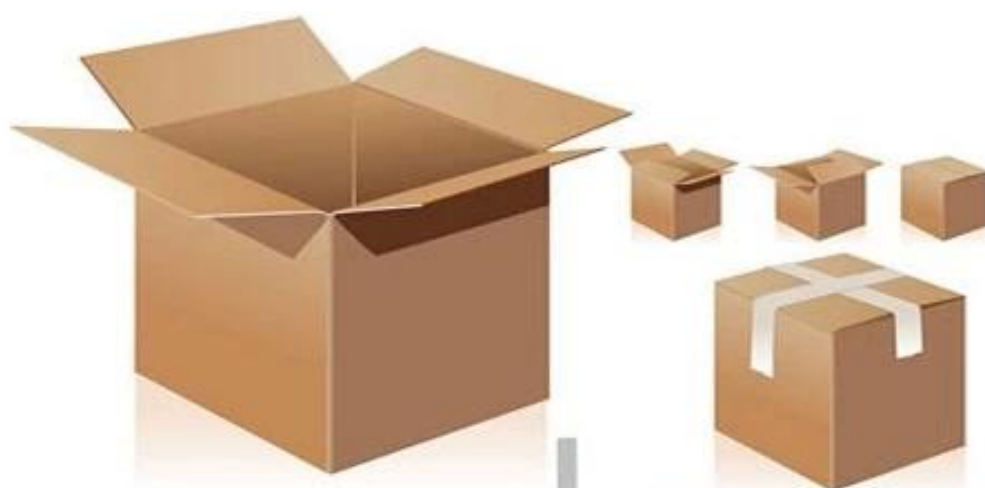



● Exhibitions

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

