

Sigara dumanı detektörü



Parametre	
Adı:	Sigara dumanı detektörü
Boyut:	Ø106mm * 59mm
Çalışma gerilimi:	9V 6F22 pil
Bekleme akımı:	≤15uA
Alarm akımı:	≤56mA
Pil çalışma hayatı:	1 yıldan daha az
Güç göstergesi:	R,ed LED
Alarm göstergesi:	R,ed LED flaş yanıp söner
Ses basıncı:	85 dB / m
Çalışma sıcaklığı:	-10 ° C ~ 50 ° C
Çalışma nemi:	≤95% RH
Verici Mesafesi:	<100m (açık alan)
Yürütme ölçütü:	EN14604
Algılama alanı:	Kurulum yüksekliği 40 metrekare 6 ila 12 metre arasında. Kurulum yüksekliği 20 metrekare 6 metre içinde.

Sigara dumanı dedektörümüzün özellikleri nelerdir?



9V 6F22 battery,wireless output 315MHz or433MHz

Sound&flash alarm wireless fire alarm smoke detector

Dust-proof,moth-proof and anti-Interference function

Suitable for detecting the smoke in house,shop,hotel...


2 years quanlity,welcome to do OEM and ODM

IN-KIND SHOOTING



UYGULAMA

Standalone Gas detector

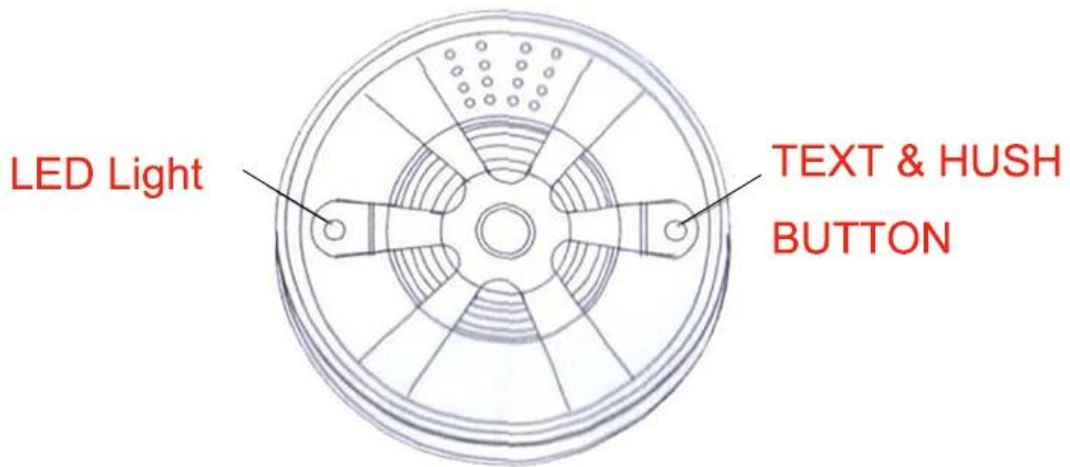

The detector adopts the reflection principle of smoke particles that can reflect infrared light. The main circuit includes a MCU processing Section, an infrared-emitting portion and an infrared receiving portion.



Detector will get into normal working state after connecting battery power, LED will flash once per every 42 seconds.

DİĞER SEÇİM HAKKINDA NASIL?

