

Converter RS232/485 to TCP/IP

Interface : Ethernet(10BASE-T), RS232/485 with 6 wiring terminals

Format: TCP/UDP/IP/ICMP, Ethernet, ARP

300bps-115200bps transmission speed

DC 4.5-5.5V working voltage

Serial converter is TCP/IP protocol of two-way conversion transmission equipment, changing the traditional serial port communication to network communication, to achieve fast serial device networking .

SMQT®



• Parameter

SMQT®

Parametre	
Ürün adı	Veri iletim dönüştürücü RS232 / 485'den TCP / IP'ye
Model	EA-06
Boyut	92L * 63W * 23H (mm)
Harici güç kaynağı	DC4.5V ~ 5.5V
Seri protokol	TCP / UDP / IP / ICMP, Ethernet, ARP
İletişim Arayüz	Ethernet (10Base-T), RS232 / 485 Terminal anahtarı ile
Sinyal göstergesi	Üç sinyal lambası TXD RXD GÜÇ
İletim orta	Korumalı bükülmüş çift tel
Aktarım hızı	300bps ~ 115200bps
İzolasyon	3500VRMS
Renk	gri
Kullanımı	Veri aktarımı
Bağıl nem	% 5 -% 95
Çevre Sıcaklık	0 ° C ~ 50 ° C
Net ağırlık	0.624kg

• In-kind shooting

SMQT®



• Feature

SMQT[®]



EA-06

Converter RS232/485 to TCP/IP

Dimension: 96×63×23(mm)


Transmission speed: 300bps-115200bps

Format: TCP/UDP/IP/ICMP/Ethernet/ARP

Interface: Ethernet(10Base-T), RS232/485

with 6 wiring terminals

Welcome OEM and 2 years quality warranty

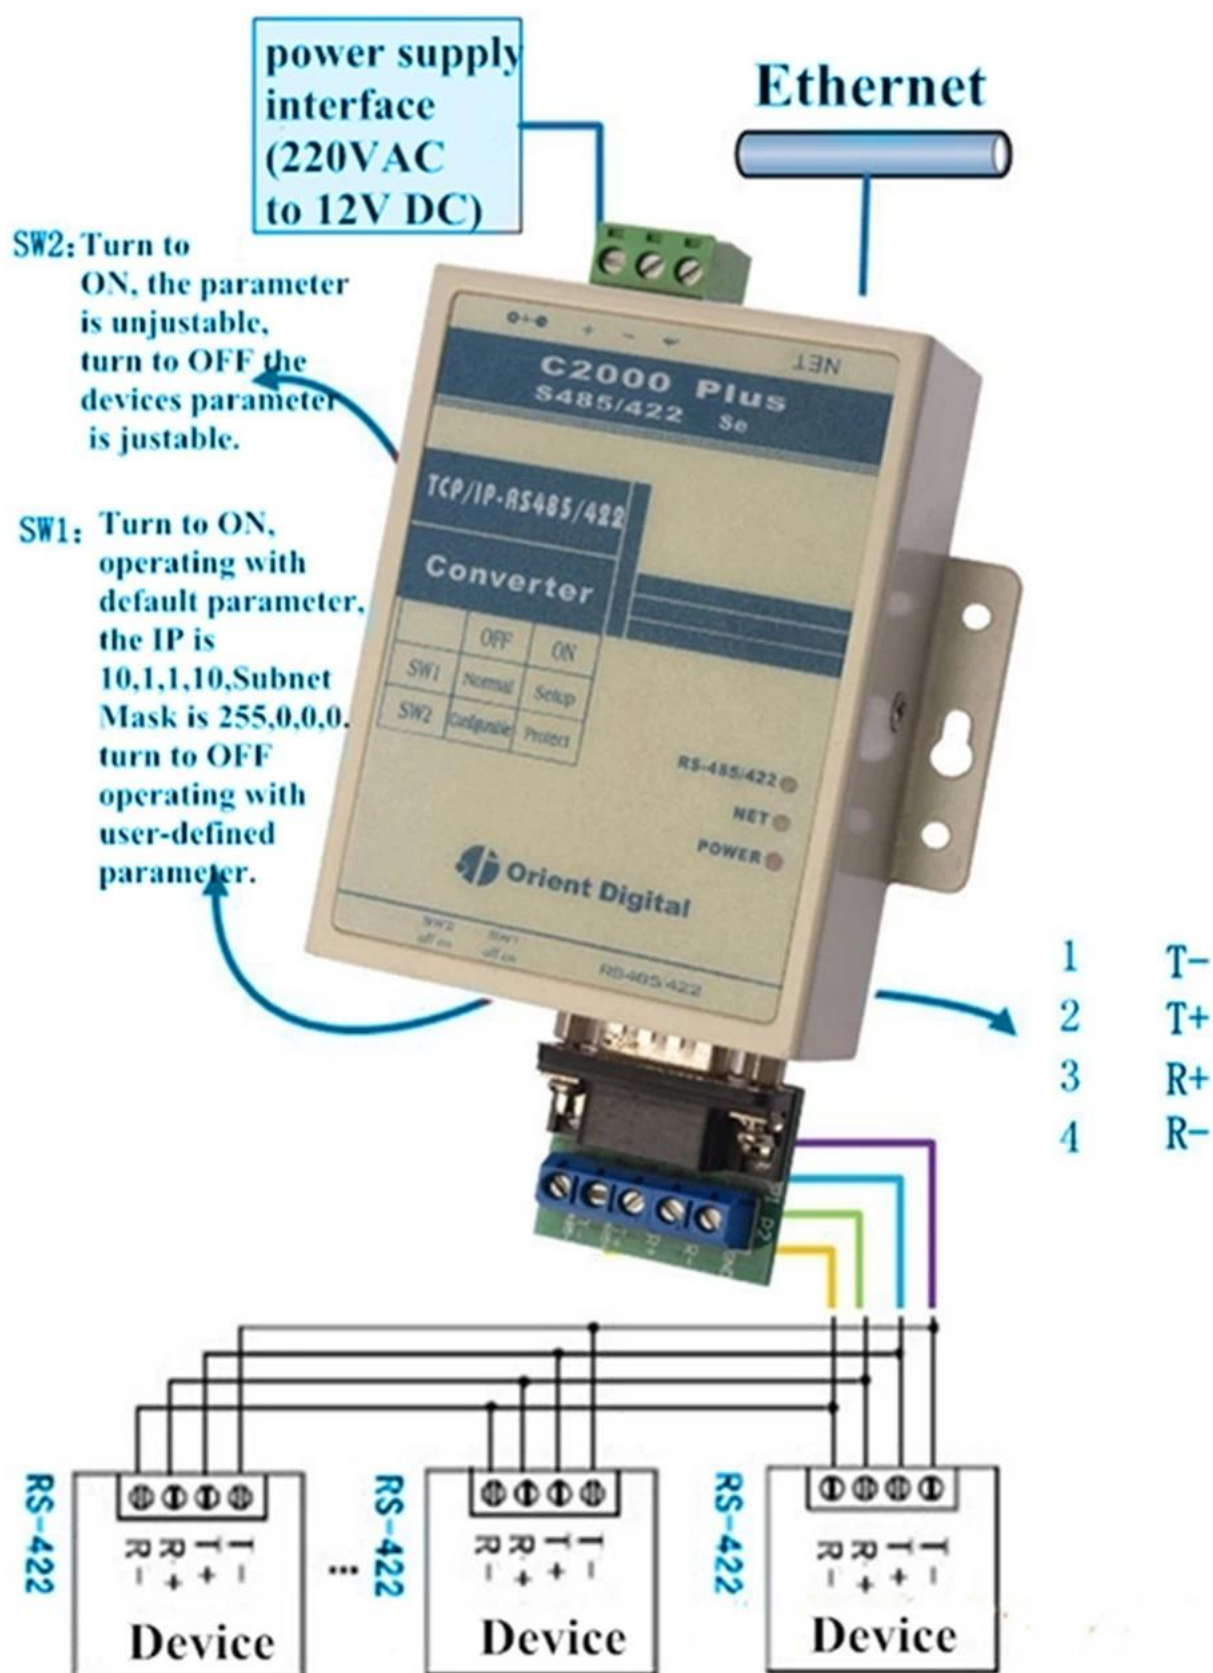

Ambalaj listesi	
Ürün adı	Veri iletim dönüştürücü RS232 / 485'den TCP / IP'ye EA-06
Miktar	Karton başına 20 parça
Karton boyutu	43 * 30 * 37 (cm)
Ağırlık	15kg



• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....