

Wired embedded magnetic contact

NC/NO mode optional

35±5(mm) gap distance


Max voltage≤100VDC, Max current≤500mA

Suitable for metal door or window

White/Brown color optional

24g weight

SMQT®

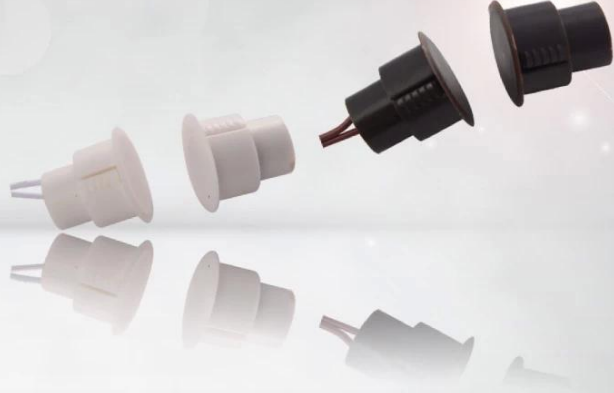

• Parameter

SMQT®

Parametre	
Ürün adı	Yerleşik manyetik kontak sensörü
Model	EB-136
Boyut	Φ19 × 25 (mm)
Kod modu	NO / NC (isteğe bağlı)
boşluk	35 ± 5 (mm)
Maksimum voltaj	≤100V DC
Maksimum akım	≤500mA
azami derecelendirme	≤10W
Renk	Kahverengi / Beyaz (isteğe bağlı)
İçin uygun	Metal kapı veya pencere
Malzeme	Ateşe dayanıklı ABS gövde
Çalışma sıcaklığı	-10 °C ~ 50 °C
Net ağırlık	24gr

• In-kind shooting

SMQT®



• Feature

SMQT®



EB-136



Dimension: $\Phi 19 \times 25(\text{mm})$

Material: ABS

Max Gap: $\leq 40\text{mm}$

Install way: Drill hole install

Wire : 22# wire 40cm

Power : 0.5A 10W

Fire-proofing materials

Adopt ABS flame retardant material, fire retardant safer, connecting with 22 # wire, total length of 30 cm. Suitable for metal doors and cabinet door, etc.



Waterproof seal

Using imported PC glue sealing, close the magnet and wiring, waterproof, and durable leakage, using more safe and more comfortable



Strong magnetism

Magnetic strength, which can be installed directly drilling, stable performance.



• Packaging & shipping

SMQT®

Ambalaj listesi	
Ürün adı	Yerleşik manyetik kontak sensörü EB-136
miktar	Karton başına 600 parça
Karton boyutu	38 * 30 * 30 (cm)
Ağırlık	16kg



• Office show

SMQT®



2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair





2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair