

• Parameter

SMQT®

Ürün numarası	EA-22A	EA-22B
standart Yapısı	Alüminyum paneller, metal düğmeler	Alüminyum paneller, metal düğmeler
Elektrik Performans	Güncel maksimum dayanıklılık 3A36VDC	Güncel maksimum dayanıklılık 3A36VDC
dayanıklılık testi	500.000 kez test yaşanma	500.000 kez test yaşanma
Tip	Uygulanabilir içi boş çerçeveler ve batık elektrik kutusu	Uygulanabilir içi boş çerçeveler ve batık elektrik kutusu
Sıcaklık	-10 ~ + 55 °C	-10 ~ + 55 °C
uygulanabilir nem	% 0 ila 95 (nispi nem)	% 0 ila 95 (nispi nem)
Panel İşleme	Alüminyum paneller kumlanmış	Alüminyum paneller kumlanmış

• Introduction

SMQT®



eriřim kontrol sistemi için malzeme metal ve paslanmaz çelik itme

çıkış düğmesi ile kapı kilidi açma düğmesine basın.

• *Feature*

SMQT



EA-22A



EA-22B



EA-22A



EA-22B

Advantages

Aluminum panel with the sand blast treatment

Pure copper plating nickel button


500,000 times mechanical test

• *Installation*

SMQT



Switch power supply

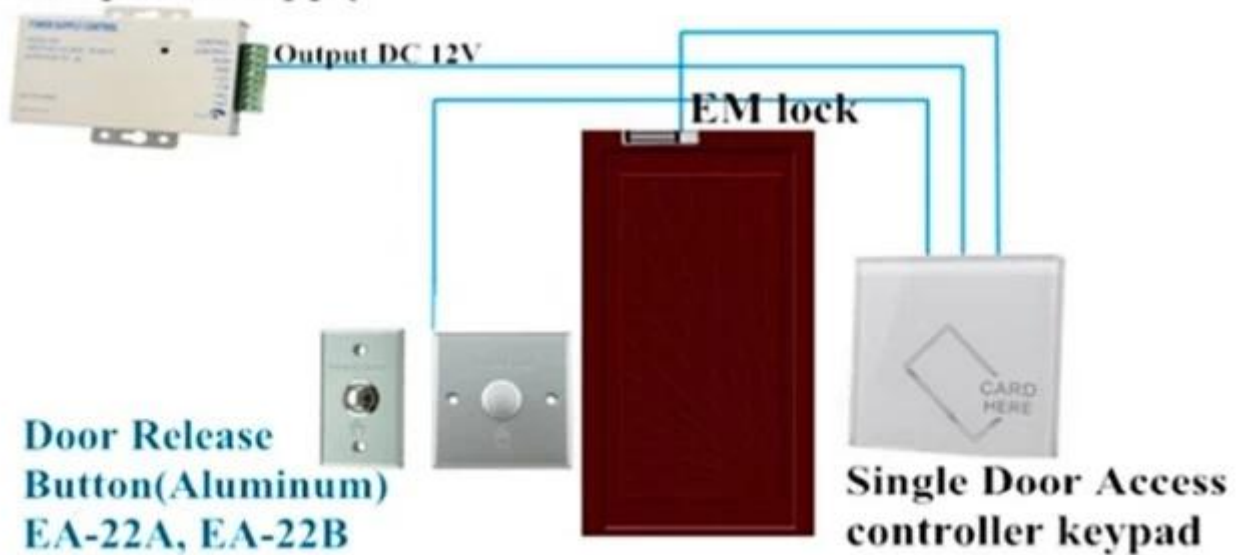

•Dimension



• Packaging & shipping

SMQT





● *Office show*

SMQT®



● *Exhibition*

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair



.....