




Şartname	
Ürün adı:	Bağımsız duman dedektörü, kablosuz duman sensörü, alarm dumanı
Boyut:	Ø106mm * 59mm
Çalışma Gerilimi:	9V 6F22 pil
Bekleme akımı:	≤15uA
Alarm Akımı:	≤56mA
Pil Çalışma Ömrü:	1 yıldan daha az
Güç göstergesi:	R,ed LED
Alarm Göstergesi:	R,ed LED yanıp sönüyor
Ses basıncı:	85 dB / m
Çalışma sıcaklığı:	-10 ° C ~ 50 ° C
Çalışma Nemi:	≤95% RH
İletim Mesafesi:	& lt; 100m (açık alan)
Kriteri uygula:	EN14604
Algılama alanı:	Kurulum yüksekliği 40 metrekare 6 ila 12 metre arasında. Kurulum yüksekliği 20 metrekare 6 metre içinde.

Duman dedektörümüzün özellikleri nelerdir?

Standalone Gas detector

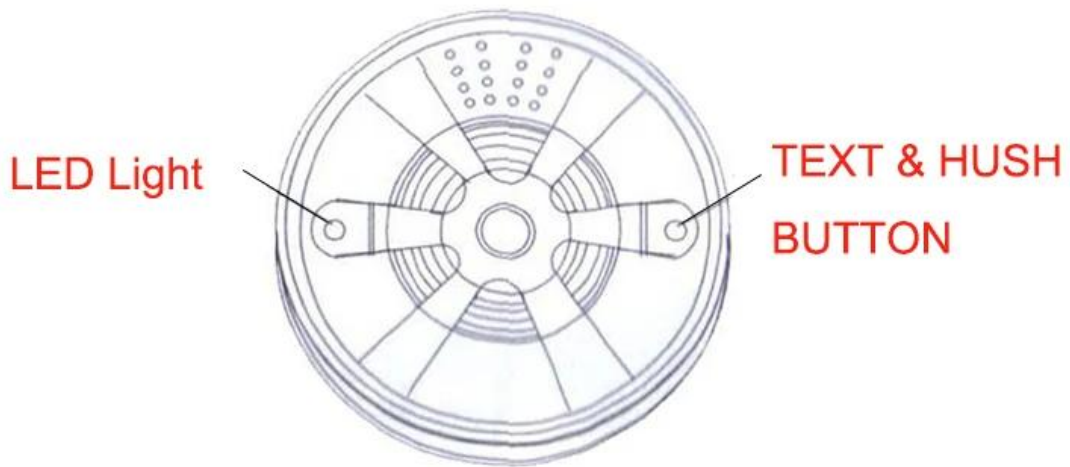

The detector adopts the reflection principle of smoke particles that can reflect infrared light. The main circuit includes a MCU processing Section, an infrared-emitting portion and an infrared receiving portion.



Detector will get into normal working state after connecting battery power, LED will flash once per every 42 seconds.

ÇEŞİTLİ ÇEKİM



VİTRİN



OFİS GÖSTERİSİ



MÜŞTERİ



SERGISİ



SERTİFİKA



İŞBİRLİĞİ NASIL



Trade terms:	EXW
Payment terms:	T/T, Western union, Paypal etc
Delivery time:	Normal order within 7 days, bulk order 10-15days
Packing:	Neutral paper box and paper carton
Shipping:	Express company or by sea, by air or appointed by buyer