

**DC12V 5A Đầu ra AC100V 260V Đầu vào An ninh Kiểm soát truy cập Cửa
kiểm soát truy cập Nguồn điện liên tục Model TA-208CK-D Thương hiệu
OEM 3 đèn LED**



Thông số chính của TA-208CK-D

Tên:	DC12V 5A Đầu ra AC100V 260V Đầu vào An ninh Kiểm soát truy cập Cửa kiểm soát truy cập Nguồn điện liên tục Model TA-208CK-D Thương hiệu OEM 3 đèn LED
Mô hình:	TA-208CK-D
Kích thước:	212×172×70(mm)
Điện áp đầu vào:	AC100-260V
Tần số đầu vào:	50-60Hz
Điện áp đầu ra:	DC 12V
Dòng điện đầu ra:	5A
Công suất đầu ra:	50W
Độ chính xác điện áp đầu ra:	1%
Bảo vệ đầu ra:	Bảo vệ ngắn mạch và quá tải
Role thời gian:	0 ~ 15 giây có thể điều chỉnh
Thích hợp cho:	Kiểm soát truy cập một cửa hoặc hệ thống liên lạc qua điện thoại cửa

Cổng pin dự phòng:	Hỗ trợ kết nối pin dự phòng
Chất liệu:	Bo mạch PC hai mặt Máy biến áp đồng nguyên chất Vỏ kim loại
Nhiệt độ môi trường:	-30°C đến 60°C
Bảo hành:	1 năm

Những tính năng nào TA-208CK-D có?

Appearance




Size




:mm

Inside specification

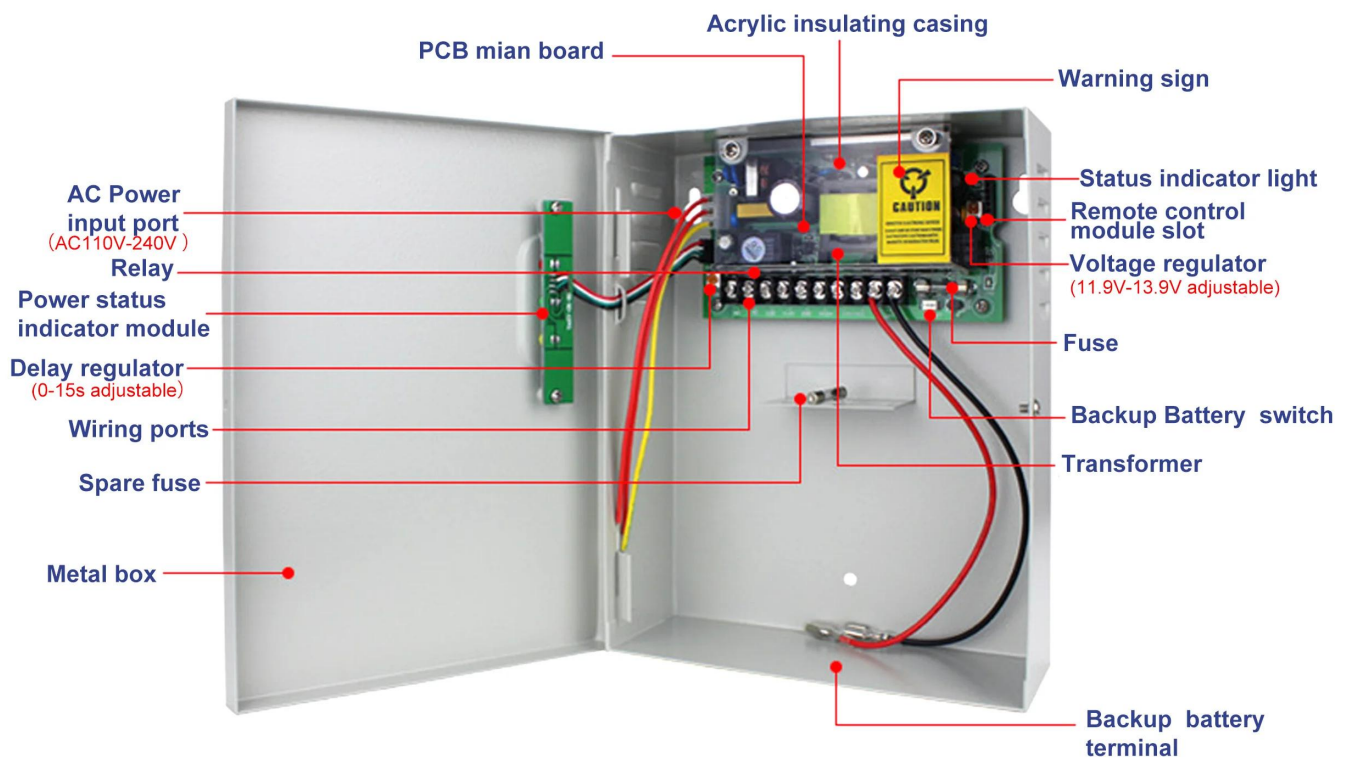

Power status indicator light

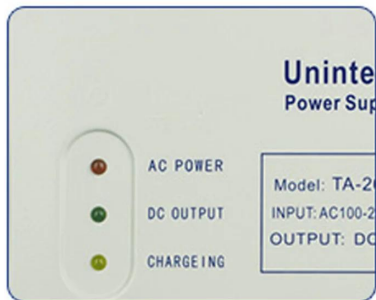


It clearly displays the power usage status and the battery charging status.

High quality main board



By utilizing SMT technology, the quality of the power supply becomes more reliable and stable.

Backup Battery charging protection

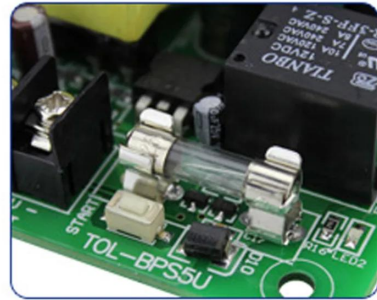

The battery start button provides protection against overcharging, over-discharging, and reverse polarity.





01 Metal Box Housing

Standard heat dissipation and ventilation design, fully metal construction, ensuring excellent heat dissipation and interference shielding capabilities. The box cover is detachable and fastened with clips, making it suitable for applications with limited installation space. The interior of the box features two gourd-shaped hanging holes and three screw holes for top-mounted components.

02 All-copper transformer

This 50W high-power transformer boasts high efficiency, providing sufficient output to power one access control controller, two electric padlocks, or two 280-kilogram magnetic locks simultaneously without any issues.

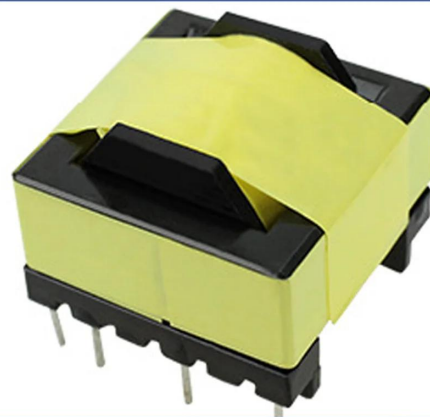


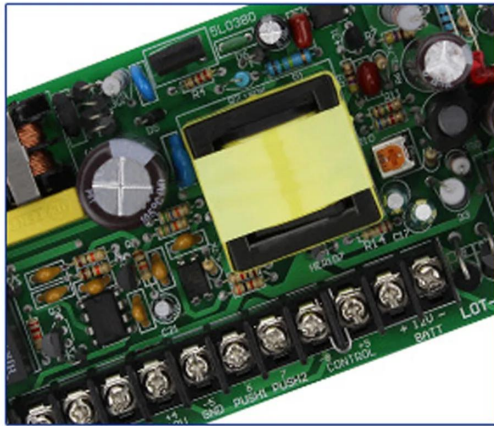


03 High Quality Main Board

Excellent waveform quality, free from high-frequency ripple interference; relay design is also included.

04 Time Delay Adjustment

The delay between power output and activation can be adjusted to range from 0 to 15 seconds.

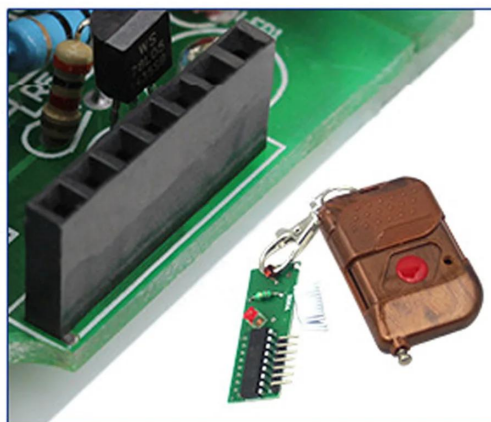
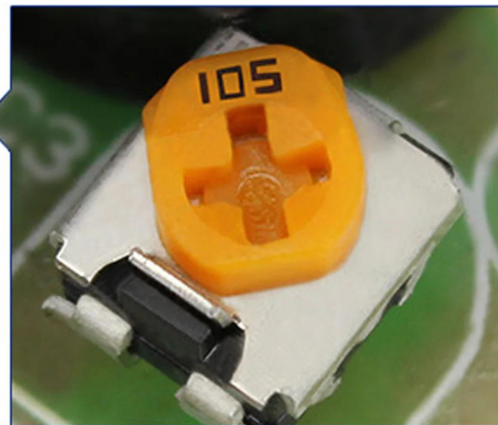


05 Remote Control Module Slot

The access control power controller is equipped with a slot for the remote control unlocking module. You can insert the remote control module into this slot to unlock the door with just one button.

06 External Connection Ports


External connection ports facilitate wiring and make them easy to use, thus saving installation time.

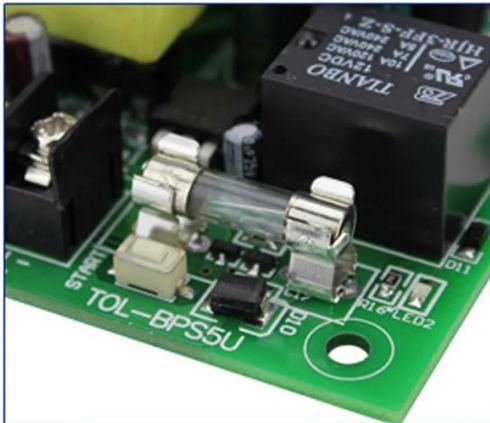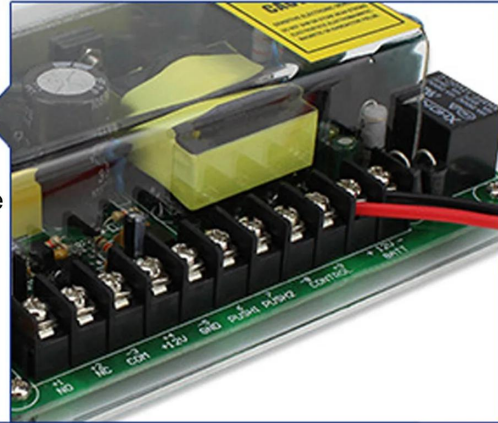

07 Battery Charging Protection Function

When the voltage of the battery drops to 9.5V, the circuit will automatically disconnect the battery in order to protect it as well as the data stored in the access control device. When the battery voltage rises to 13.5V, the circuit will again automatically disconnect the battery to prevent overcharging, thereby significantly extending the battery's lifespan.

Wiring diagram

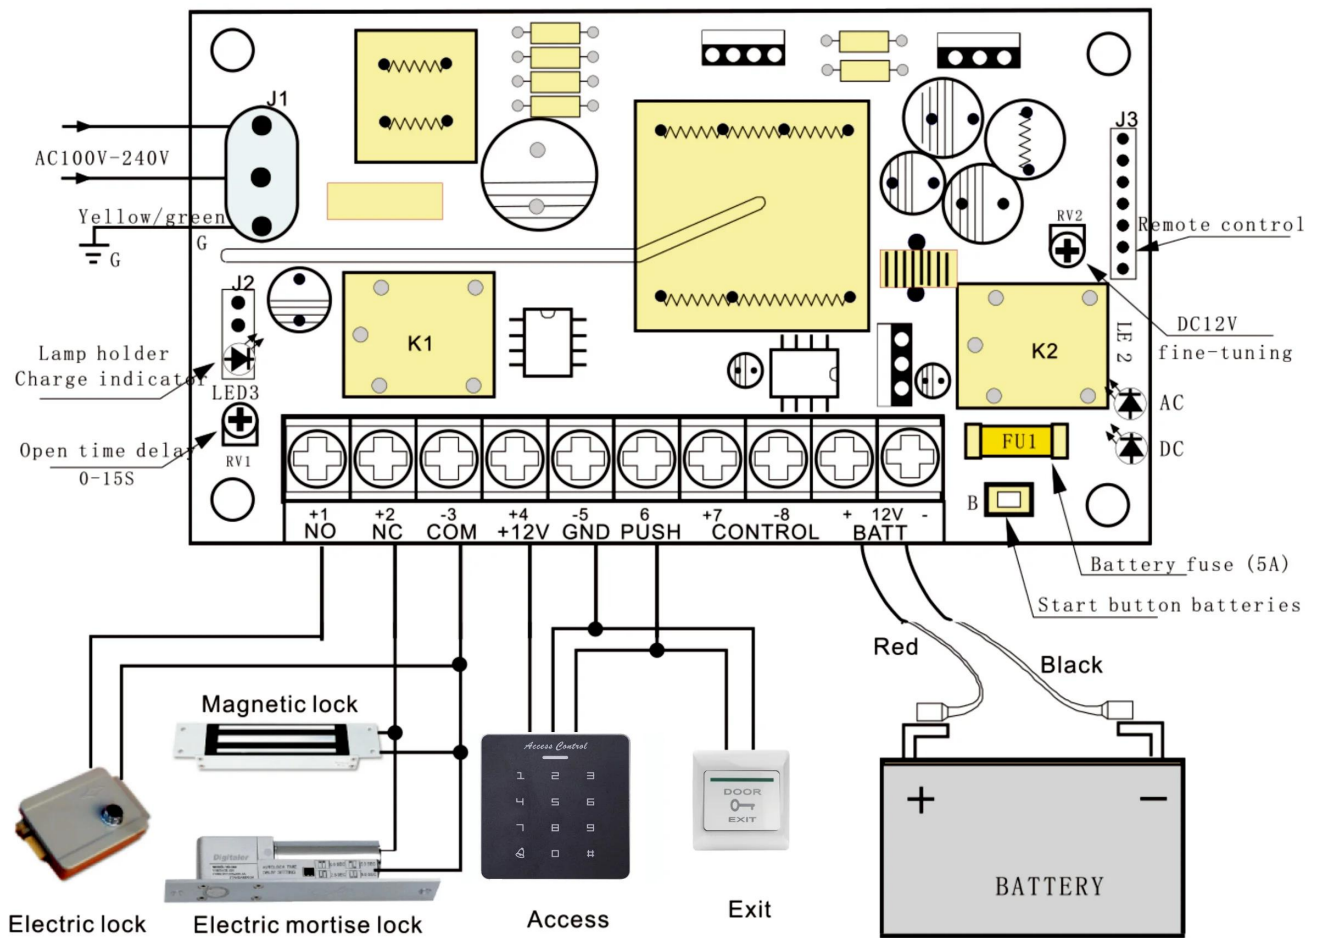

Packing





◀ L212×W165×D70mm

L212×W173mm×D76mm▶
Weight:1.05kg



Còn sự lựa chọn khác thì sao?



SMQT show



Team



Factory

CERTIFICATE OF CONFORMITY



