

• *Parameter*

SMQT

số sản phẩm	EA-22A	EA-22B
Cơ cấu tiêu chuẩn	tấm nhôm, nút kim loại	tấm nhôm, nút kim loại
hiệu suất điện	Hiện tại 3A36VDC độ bền tối đa	Hiện tại 3A36VDC độ bền tối đa
kiểm tra độ bền	500.000 lần thử nghiệm lão hóa	500.000 lần thử nghiệm lão hóa
Đối với Loại	khung rỗng áp dụng và hộp điện chìm	khung rỗng áp dụng và hộp điện chìm
Nhiệt độ	-10 ~ + 55 °C	-10 ~ + 55 °C
độ ẩm áp dụng	0-95% (độ ẩm tương đối)	0-95% (độ ẩm tương đối)
bảng điều chỉnh chế biến	tấm nhôm phun cát	tấm nhôm phun cát

• *Introduction*

SMQT



Cửa nút khóa phát hành với kim loại nguyên liệu và thép đẩy nút

thoát không gở cho hệ thống kiểm soát truy cập.

• *Feature*

SMQT



EA-22A



EA-22B



EA-22A



EA-22B

Advantages

Aluminum panel with the sand blast treatment

Pure copper plating nickel button


500,000 times mechanical test

• *Installation*

SMQT



Switch power supply

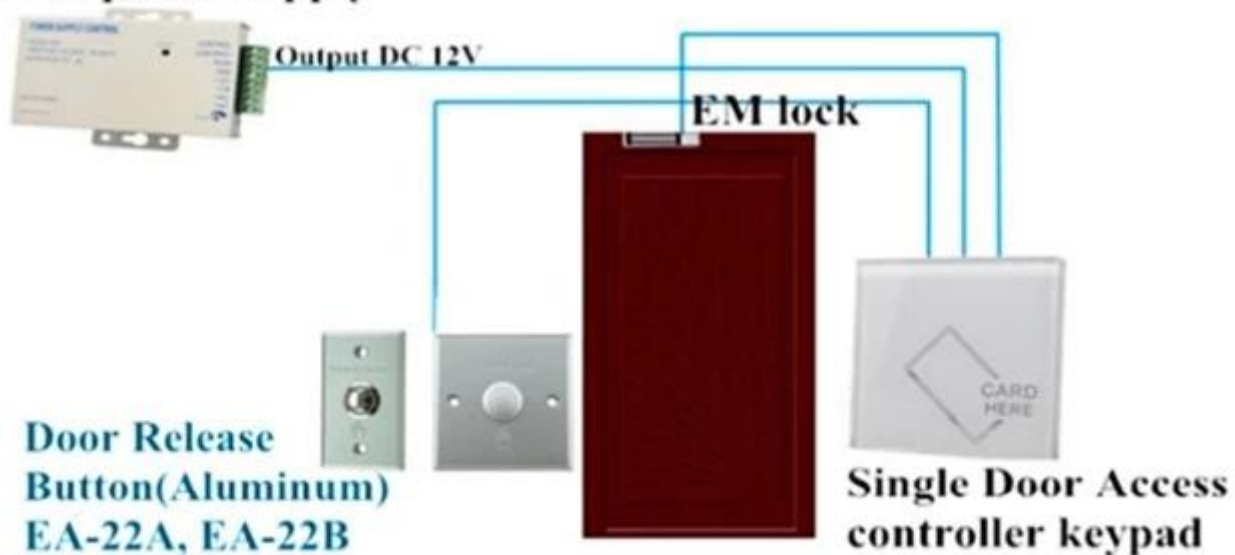

•Dimension

SMQT



EA-22A



EA-22B

• Packaging & shipping

SMQT®





• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

