

Converter RS232 to RS485

Compatible with RS-232,RS-485/RS-422 standard of EIA/TIA

RS-232 interface, DB9(holes)

RS-422/RS-485 interface,DB9(pin) with 6 terminals

300-115.2kbps transmission speed


Twisted-pair cables as transmission medium

With protection of $\pm 15\text{KVESD}$,RS-422/RS-485 of 600W lightning strike and surge power of each line.

3500VRMS isolation

500VDC isolation voltage

SMQT

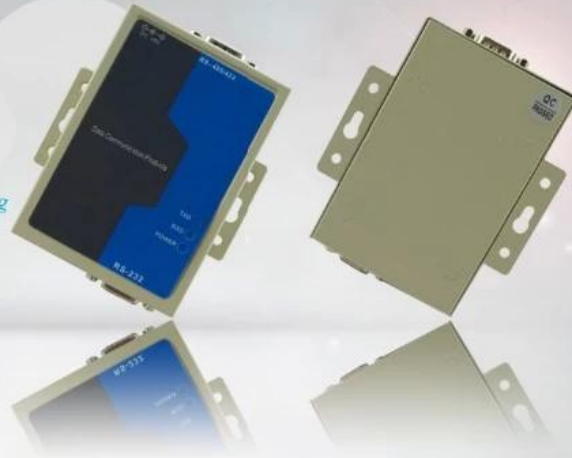

• Parameter

SMQT

Kích cỡ sản phẩm	90L * 65W * 25.5H (mm)
cung cấp điện bên ngoài	DC9V
Đặc tính giao tiếp	Giao diện tương thích với EIA / TIA RS-232C, RS-485 / RS-422 tiêu chuẩn
Điện Interface	RS-232C giao diện DB9 nữ cổng kết nối, RS-422 / RS-485 giao diện DB9 connector nữ và được trang bị sáu thiết bị đầu cuối
tốc độ truyền	300-115.2KBPS
dấu hiệu cho thấy tín hiệu	Ba tín hiệu đèn TXD RXD ĐIỆN
phương tiện truyền dẫn	Được che chắn cặp dây xoắn
lớp bảo vệ	RS-232 $\pm 15\text{KVESD}$ bảo vệ, RS-422 / RS-485 để 600W mỗi dòng bảo vệ tăng sét
Cô lập	3500VRMS
Điện áp cách ly	500VDC liên tục
môi trường	5% đến 95%
Nhiệt độ hoạt động	0 °C ~ 50 °C

• Introduction

SMQT

Bộ chuyển đổi kiểm soát truy cập cửa là 2 dây RS485 RS422 Ethernet chuyển đổi và dc chuyển đổi cho nhà.



• *Feature*

SMQT



Converter RS232 to RS485

Interface compatible with EIA / TIA RS-232C,
RS-485 / RS-422 standard

Electrical Interface:

RS-232C interface DB9 female connector port,
RS-422/485 Interface DB9 female connector

Transmission medium: shielded twisted pair wire

300-115.2KBPS transmission rate

Lightning surge protection

Working Humidity: 5%~95%


Environment temperature: 0 °C ~ 50 °C

Net weight: 0.62kg

Welcome OEM and 2 years quality warranty

• *Installation*

SMQT

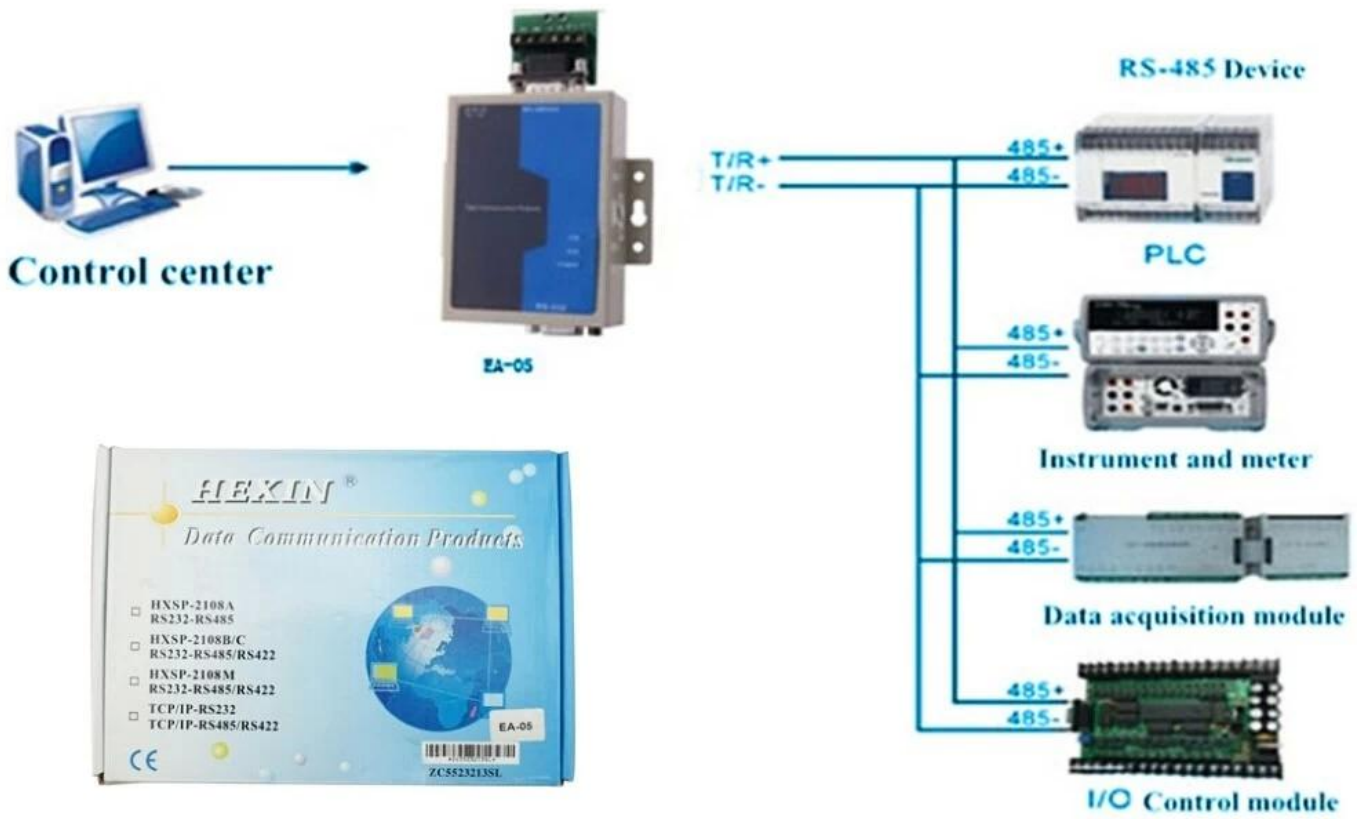

• Show case

SMQT®



• Packaging & shipping

SMQT®



• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair