

Wired embedded magnetic contact

NC/NO mode optional

35±5(mm) gap distance


Max voltage≤100VDC, Max current≤500mA

Suitable for metal door or window

White/Brown color optional

24g weight

SMQT

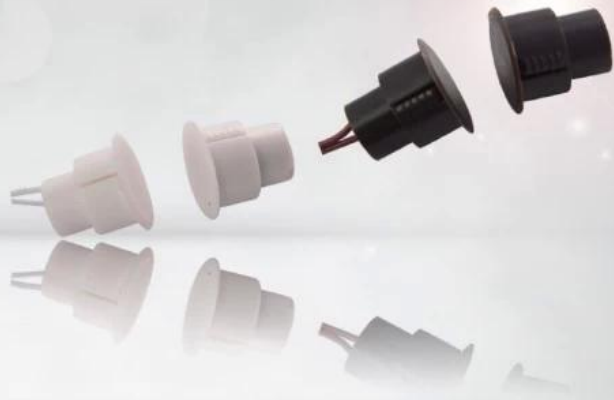

• Parameter

SMQT

Đặc điểm kỹ thuật	
nanme sản phẩm	Wired cửa Magnetic Sensor Liên hệ
Số mô hình	EB-136
Kích thước	Φ19 * 25 (mm)
liên quan	Thông thường mở / thường đóng
khoảng cách hoạt động	35 ± 5 (mm)
áp lực tối đa	≤100VDC
tải trọng hiện tại	≤500mA
Công suất làm việc	≤10W
Vật liệu nhà ở	ABS vật liệu chịu lửa
hình dạng màu sắc	Brown / White
Phạm vi	Sắt cửa hoặc cửa sổ
trọng lượng sản phẩm	24g

• Introduction

SMQT

Việc chuyển đổi xúc của điện tử là cửa cảm biến điện tử cho hệ thống an ninh báo động cửa và hệ thống kiểm soát truy cập cửa.

PRODUCT PICTURE



PRODUCT FEATURE



EB-136



Dimension: $\phi 19*25$ (mm)

Material: ABS

Max Gap: ≤ 40 mm

Install way: Drill hole install

Wire : 22# wire 40cm

Power : 0.5A 10W

Fire-proofing materials

Adopt ABS flame retardant material, fire retardant safer, connecting with 22 # wire, total length of 30 cm. Suitable for metal doors and cabinet door, etc.



Waterproof seal

Using imported PC glue sealing, close the magnet and wiring, waterproof, and durable leakage, using more safe and more comfortable



Strong magnetism

Magnetic strength, which can be installed directly drilling, stable performance.







● Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....