

Wired magnetic contact sensor

Fireproof ABS material shell

NO/NC model optional


Brown/white color optional

20±5(mm) gap distance

Suitable wooden door or window

14g weight

SMQT

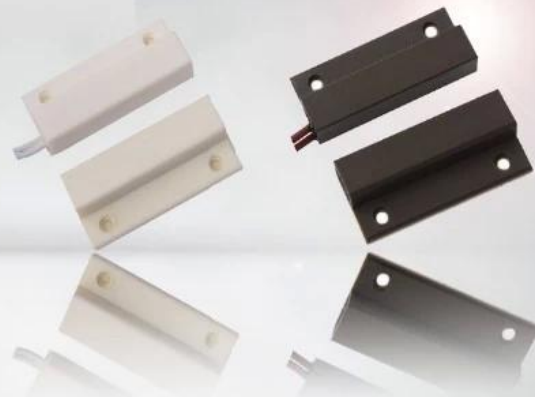

• Parameter

SMQT

Kích thước	41L * 27W * 8 (mm)
liên quan	Thông thường mở / thường đóng
khoảng cách hoạt động	20 ± 5 (mm)
áp lực tối đa	≤100VDC
tải trọng hiện tại	≤500mA
Công suất làm việc	≤10W
Vật liệu nhà ở	ABS vật liệu chịu lửa
hình dạng màu sắc	Brown / White
Phạm vi	cửa không màu hoặc cửa sổ
trọng lượng sản phẩm	12g

• Introduction

SMQT

Các cửa liên lạc từ switch dò là cảm biến chuyển động cửa cho thiết bị mở cửa gần báo động cảm biến.

PRODUCT PICTURE



PRODUCT FEATURE



EB-132

Dimension: 34×41×6.5(mm)

NO/NC mode optional

20±5(mm) distance gap

MAX voltage ≤ 100VDC, MAX current ≤ 500mA

Fireproof ABS material shell

White/Brown color optional

Suitable for wooden door or window

14g weight

2 years quality warranty, welcome OEM



• Office show

SMQT®



• Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair