

Wired magnetic contact sensor

NC/NO code mode optional

20±5(mm) gap distance

MAX voltage≤100V DC,MAX current≤500mA

Suitable for wooden door or window

Fireproof ABS material shell

White/Brown color optional

8g weight

SMQT



• Parameter

SMQT

Tham số	
Tên sản phẩm	cảm biến tiếp xúc từ che dấu
Mô hình	EB-135
Chiều hướng	Φ10 × 18.5 (mm)
chế độ Mã	NO / NC (tùy chọn)
Lỗ hổng	20 ± 5 (mm)
điện áp Max	≤100V DC
Max hiện tại	≤500mA
giá Max	≤10W
Màu	Brown / White (tùy chọn)
Phù hợp cho	cửa gỗ hoặc cửa sổ
Vật chất	nhà ở ABS chống cháy
Nhiệt độ làm việc	-10 °C ~ 50 °C
Khối lượng tịnh	8g

• Introduction

SMQT

Các cửa gắn báo động cảm biến hệ thống bảo mật thiết bị là cánh cửa cảm biến mở liên lạc chuyển đổi cho hệ thống kiểm soát cửa.

PRODUCT PICTURE



PRODUCT FEATURE



Door Magnetic Contact safe door happy life




(Notice: need match the home alarm system to)



Sash window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.




Notice:
Gap < 2cm



Sliding window

In window close status, door magnetic host and magnetic stripe respectively embedded in the two Windows, do not to leave a gap between, open the window after the success of alarming, Then to fixed.

2 Color optional

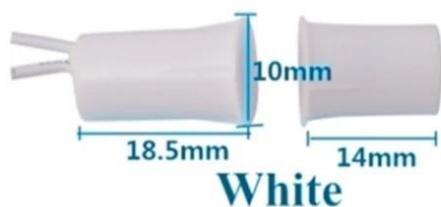





● Exhibition

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

.....