

Converter RS232/485 to TCP/IP

Interface :Ethernet(10BASE-T),RS232/485 with 6 wiring terminals

Format:TCP/UDP/IP/ICMP,Ethernet,ARP

300bps-115200bps transmission speed

DC 4.5-5.5V working voltage

Serial converter is TCP/IP protocol of two-way conversion transmission equipment,changing the traditional serial port communication to network communication, to achieve fast serial device networking .

SMQT



• Parameter

SMQT

Tên sản phẩm	TCP / IP để RS485 / RS422 Chuyển đổi
Mô hình	EA-06
Chiều hướng	92L * 63W * 23h (mm)
cung cấp điện bên ngoài	DC4.5V ~ 5.5V
giao thức nối tiếp	TCP / UDP / IP / ICMP, Ethernet, ARP
Giao diện truyền thông	Ethernet (10Base-T), RS232 / 485 với chuyển đổi thiết bị đầu cuối
dấu hiệu cho thấy tín hiệu	Ba tín hiệu đèn TXD RXD ĐIỆN
phương tiện truyền dẫn	Được che chắn cáp dây xoắn
tốc độ truyền	300bps ~ 115200bps
Cô lập	3500VRMS
Màu	màu xám
Sử dụng	truyền dữ liệu
Độ ẩm tương đối	5% ~ 95%
temperature môi trường	0 °C ~ 50 °C

• Introduction

SMQT

Nối tiếp để chuyển đổi ethernet là RS485 / RS422 để chuyển đổi TCP / IP cho hệ thống kiểm soát truy cập cửa.





Converter RS232/485 to TCP/IP

Dimension: 96×63×23(mm)


Transmission speed: 300bps-115200bps

Format: TCP/UDP/IP/ICMP/Ethernet/ARP

Interface: Ethernet(10Base-T), RS232/485

with 6 wiring terminals

Welcome OEM and 2 years quality warranty

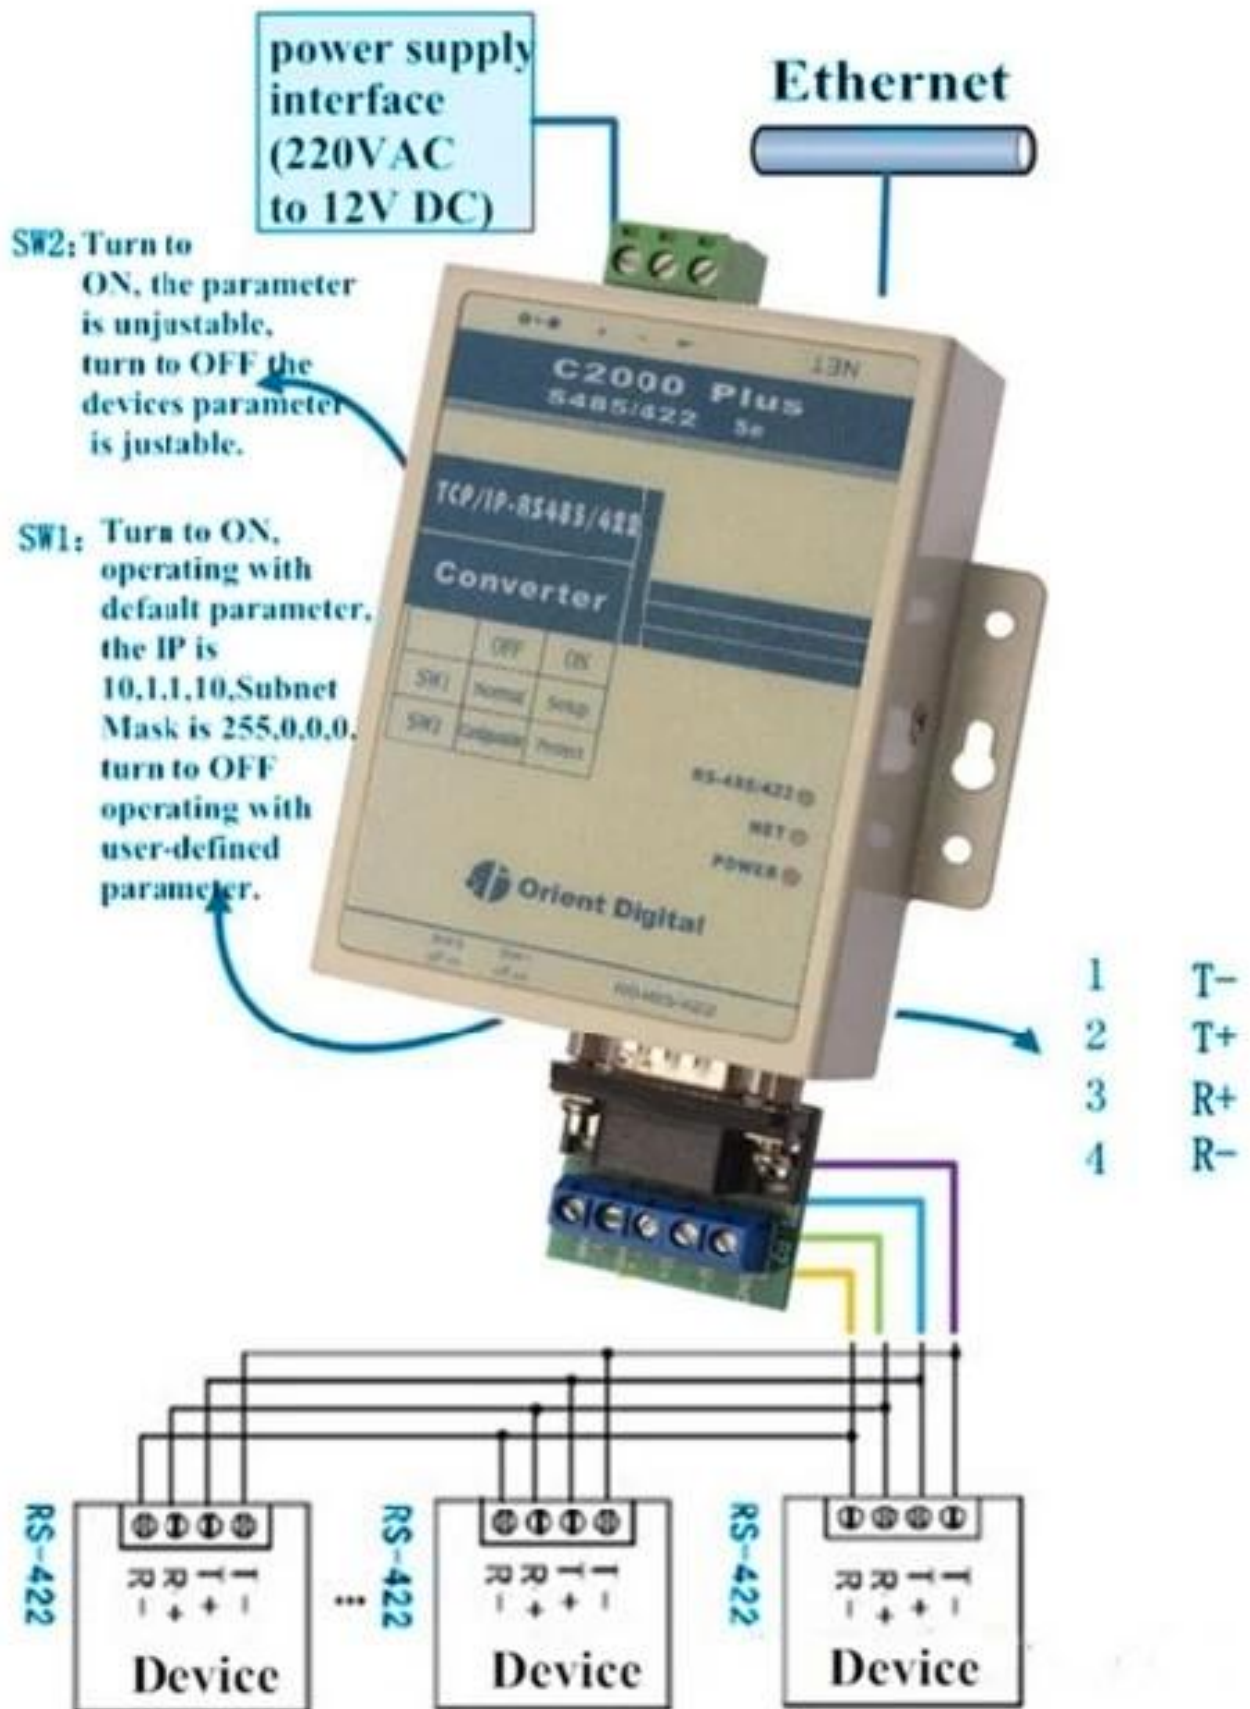



• *Office show*

SMQT®



• *Exhibition*

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair