

Wired magnetic contact sensor

Fireproof ABS material shell

NO/NC model optional


Brown/white color optional

20±5(mm) gap distance

Suitable wooden door or window

14g weight

SMQT®

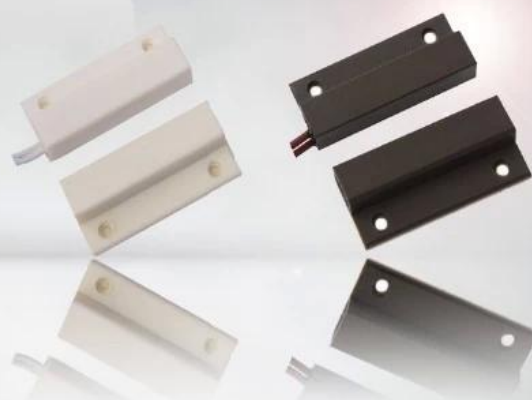

• Parameter

SMQT®

Kích thước	41L * 34W * 6.5H (mm)
liên quan	NC / NO
khoảng cách hoạt động	20 ± 5 (mm)
độ bền tối đa	≤100VDC
tải trọng hiện tại	≤500mA
Công suất làm việc	≤10W
Vật liệu nhà ở	ABS hình dạng vật liệu chịu lửa
Màu	Brown / White
Phạm vi	cửa không màu hoặc cửa sổ
trọng lượng sản phẩm	14g

• Introduction

SMQT®

Các cửa điện tử cảm biến chuyển từ tính là việc chuyển đổi dò từ và maagnetic số liên lạc chuyển đổi 12v cho hệ thống kiểm soát truy cập và hệ thống báo động.

PRODUCT PICTURE



PRODUCT FEATURE



Dimension: 34×41×6.5(mm)

NO/NC mode optional

20±5(mm) distance gap

MAX voltage ≤ 100VDC, MAX current ≤ 500mA

Fireproof ABS material shell

White/Brown color optional

Suitable for wooden door or window

14g weight

2 years quality warranty, welcome OEM



● Exhibition

SMQT

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....

2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair

