

	Specification
Product name	Wired Pir Motion Detector
Model	EB-181
Dimension	89×52.5×38.5(mm)
Operationg voltage	12V DC
Consumption current	18mA 12 DC
Detecting distance	12m
Detecting angle	110 °
Alarm output	NO/NC
Installation mode	Wall-mounted
Installation height	2.2m
Material	Fireproof ABS housing
LED	ON/OFF(optional)
Working temperature	-10 °C~50 °C
Shell color	White
Net weight	0.096kg





Mini motion pir sensor is the pir detector wired sensor for alarm system.

• *Feature*


SMQT

1. Intelligent logic control, anti false alarm efficiently
2. Auto temperature compensation
3. Pulse count adjustment

4. Anti white light interference

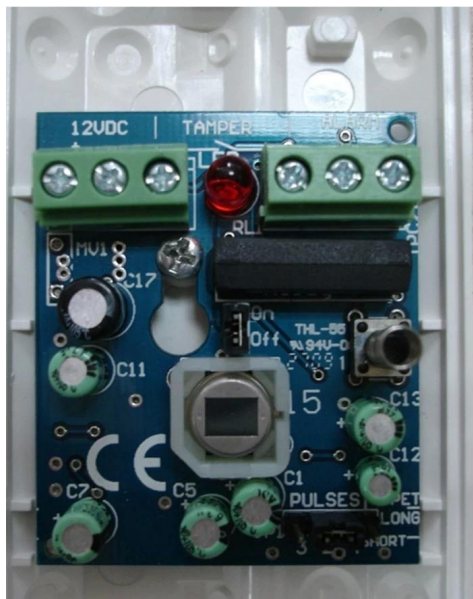


- ① Wire Exit
- ② Terminal Block
- ③ Anti-dismantle Switch
- ④ Relay
- ⑤ LED Indicator
- ⑥ LED Jumper
- ⑦ Relay Jumper
- ⑧ Dual Element IR Sensor
- ⑨ Thermistor Resistance
- ⑩ Pulse Jumper
- ⑪ PCB




- +12V
- GND
- ALARM
- TAMPER
- DV ANODE
- DV CATHODE
- ALARM OUTPUT PORT
- ANTI-TEMPER OUTPUT PORT

Detecting Area View

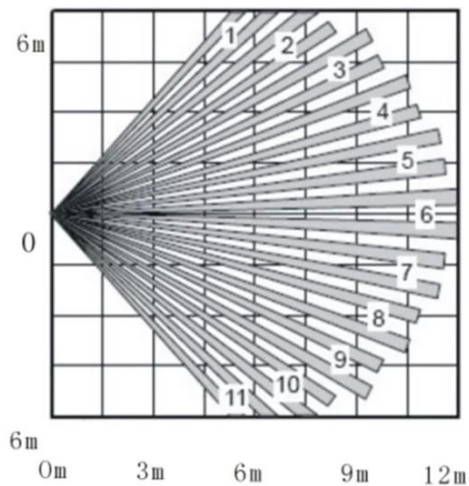

Platform

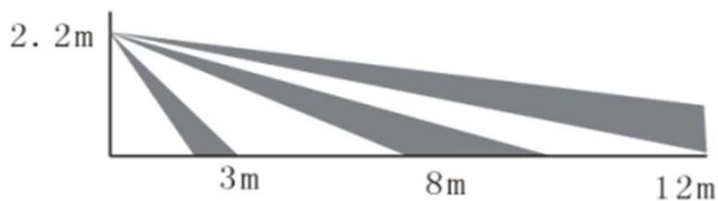

Side View

• Packaging & shipping

SMQT®



● *Office show*

SMQT®



● *Exhibition*

SMQT®

2011 Brazil Fair



2012 Shenyang Fair



2013 Jinan Fair



2013 Shenzhen Fair



.....



2012 Shenyang Fair



2013 Shenyang Fair



2013 Shenzhen Fair



2015 Shenzhen Fair