

WIFI App GSM kit de seguridad para el hogar inteligente con control de aplicaciones con cámara wifi opcional



Parámetro principal de EB-824

Nombre:	Kit de sistema de alarma inalámbrico de seguridad para el hogar con pantalla táctil GSM WIFI de 4.3 pulgadas
Modelo:	EB-824
Entrada de alimentación:	DC 5V (fuente de alimentación de interfaz estándar micro USB)
Corriente de trabajo:	& lt; 120mA
Corriente de espera:	& lt; 80uA
Alarma de corriente:	& lt; 500mA
Frecuencia inalámbrica:	433 mhz
Codificación inalámbrica:	EV 1527
Bandas GSM:	850/900/1800 / 1900mHA
Batería de reserva:	3.7V / 500mAh de iones de litio
Rango de temperatura:	0 °C ~ 55 °C
Rango de humedad:	& lt; 80% RH (sin congelación)
Tamaño de host	185x128x14.7mm
Peso:	0.7kg por kit

Tamaño del cartón:	1 set / caja de regalo de color, 470 * 320 * 234mm 10sets carton
--------------------	--

¿Qué características tiene el EB-824?

Pantalla de visualización:	4.3 pulgadas TFT de gran pantalla digital Indicación de fecha / reloj / brazo / desarmar / hora de corte
Función:	Sistema operativo con diseño multitarea. Alarma automática indica cuando está desconectado
Función de la aplicación:	Aplicación remotamente armar / desarmar Ajuste de parámetros y gestión de accesorios. Renombrar zona de defensa
Ubicación de aprendizaje / almacenamiento:	Admite hasta 100 ubicaciones de aprendizaje / almacenamiento para control remoto y detector inalámbrico
Función de grabación:	Grabe 20 segundos de voz de alarma, si se produce una alarma, el anfitrión de la alarma marcará un número de preset y reproducirá la voz de grabación
Soporte de red:	Sistema de alarma de red Wifi / GSM / 3G / GPRS Soporta diferentes canales de alarma. (Aplicación push / SMS / monitoreo de voz / alarma central para garantizar un funcionamiento estable y confiable de la alarma)
Función de teléfono:	Se puede configurar el número de teléfono de la alarma predefinida de 5 grupos, activar / desactivar SMS y activar / desactivar marcar respectivamente Soporte SMS de alarma / desarmado y voz de alarma / desarmado
La zona de defensa apoya:	Compuerta de soporte SOS, dormitorio, ventana, balcón, perímetro, humo, gas, monóxido de carbono, fugas de agua
Operaciones diarias:	Control remoto, teclado, SMS remoto, aplicación de teléfono móvil, centro de alarma GPRS
Idiomas:	Admite 10 idiomas: inglés, chino, alemán, italiano, español, ruso, polaco y francés, griego y rumano.
Función de alimentación / batería / alerta de manipulación:	Fallo de alimentación principal / falta de energía de reserva de la batería, alarma de manipulación
APP:	Android y iOS pueden ser compatibles

Standard kit



Size




Host specification

Touchscreen

Show system status, time, the alarm's information, select items.

RFID tag reader

Tap RFID tag here to arm and disarm.

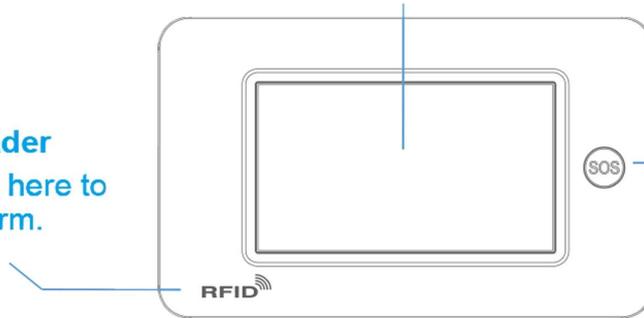


Panic button

Press to instantly sound the alarm, send an emergency alert to everyone.

Tamper switch

The tamper switch (small black lever underneath the bracket) will trigger an alarm notification if an attempt is made to remove the hub from its installed location. And the alarm sounds.

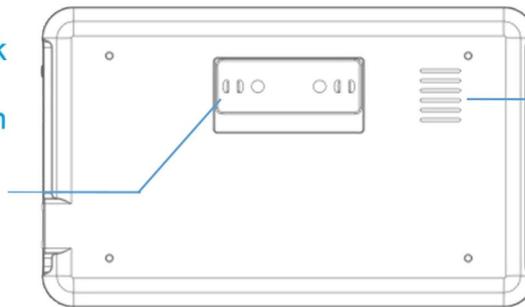


Speaker

For spoken alerts


SIM card slot

Plug in the SIM card here.

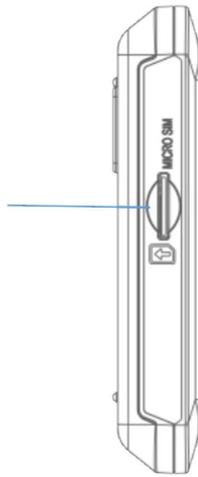

ON/OFF button

Press to turn the panel on, and "Welcome" is shown. Press and hold it until the screen is off to turn the hub off.

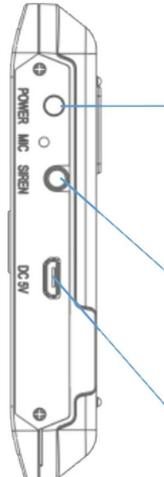


Siren port

Plug in the siren cable here.


Power port

Plug in the power cable here.


Accessories introduction

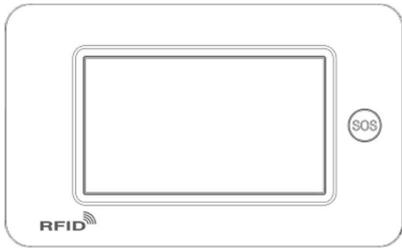

Smart Hub (Panel)
Alarm, display and keypad.

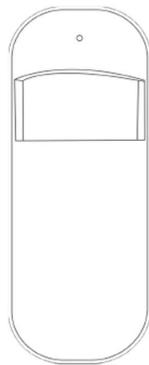

PIR Motion Detector x1
Senses when someone walks nearby.




Remote control x2
Wireless key to quickly away-arm, home-arm and disarm your home, and to trigger an emergency alarm.



RFID Tags x2 (Optional)
Key fob to quickly arm and disarm your home.



Door/Window Sensor x1(x2 optional)
Senses when a door or window opens.



External Siren
Sounds when the alarm goes off.

For Smart Hub installation



Power Adapter

Hub Bracket

Screws x2

For PIR Motion Detector installation




PIR Motion Detector Bracket

Screws x2


Extra Adhesive Mounting Strips
For door/window installation

How does it working?

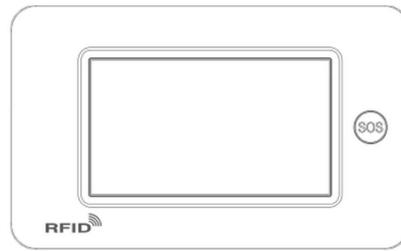


The hub receives the command and enters "Armed" mode.


Arm the system using the remote, RFID tag, the ARM button of hub touchscreen or the APP.




When a Door/Window Sensor detects a door/window opening, the sensor sends a signal to the panel letting the hub know there has been an intrusion.



The hub internal siren sounds at 85dB on-site, and an optional external siren sounds at 100dB.

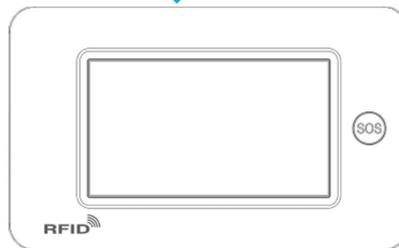

The APP lets you know what's happening at home, anywhere, any time.

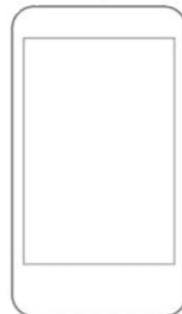

The hub sends a push notification and text message to your phone when a sensor is triggered if you enable the notification function located in your app settings. After that the hub will also make phone calls to each preset phone numbers.

When an intrusion is detected, the hub sends a signal to the siren.

Optional accessories



Wireless PIR

Door sensor



Wireless door sensor

Wireless water sensor

Glass break sensor



Smoke

CO gas

Gas

Siren

Wifi camera



Button




Key fob

Remote

Free Android & IOS App



Easy security

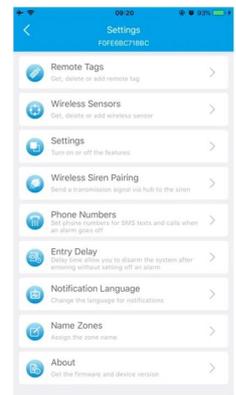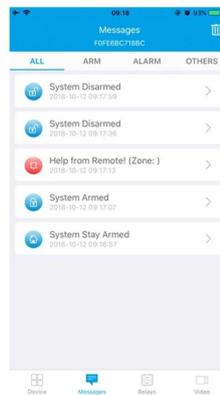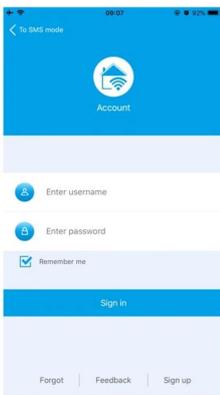

¿Qué hay de otra opción?

SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技

