

**Max 120db Fire Alarm System strobe light Sounder Warning
Siren May 8 tone adjustable**



Pangunahing parameter ng EB-162


Pagtutukoy	
Pangalan ng Produkto	8 tones adjustable 105db outdoor Fire at emergency use alarm strobe light siren
Modelo	EB-162
Sukat	126*120*107(mm)
Gumaganang boltahe	DC 12~30V
Kasalukuyang alarma	<40mA (ayon sa paraan ng pagtatrabaho)
Presyon ng tunog	105db
Pinagmulan ng audio	8 tono at magaan na kumbinasyon (malayang nababagay)
Ligh flash cycle	<1.3s
Temperatura ng pagtatrabaho	-20°C~50°C
Paraan ng Pag-install	Nakasabit sa dingding
Tagapagpahiwatig ng alarma	Pulang LED na ilaw
Operating humidity	95%RH

Temperatura ng imbakán	-20°C~60°C
Kulay	Pula
Timbang	0.4kg


Mga tampok

Ito ay uri ng manu-manong panlabas na tunog at flash strobe siren EB-162, ito ay angkop para sa sunog, medikal, patrol atbp, ang mga LED flash lights mag-import ng orihinal mula sa US at ultra sound loudness piezoelectric device, na may mataas na conversion na kahusayan para sa photoacoustic, kuryente.


Size

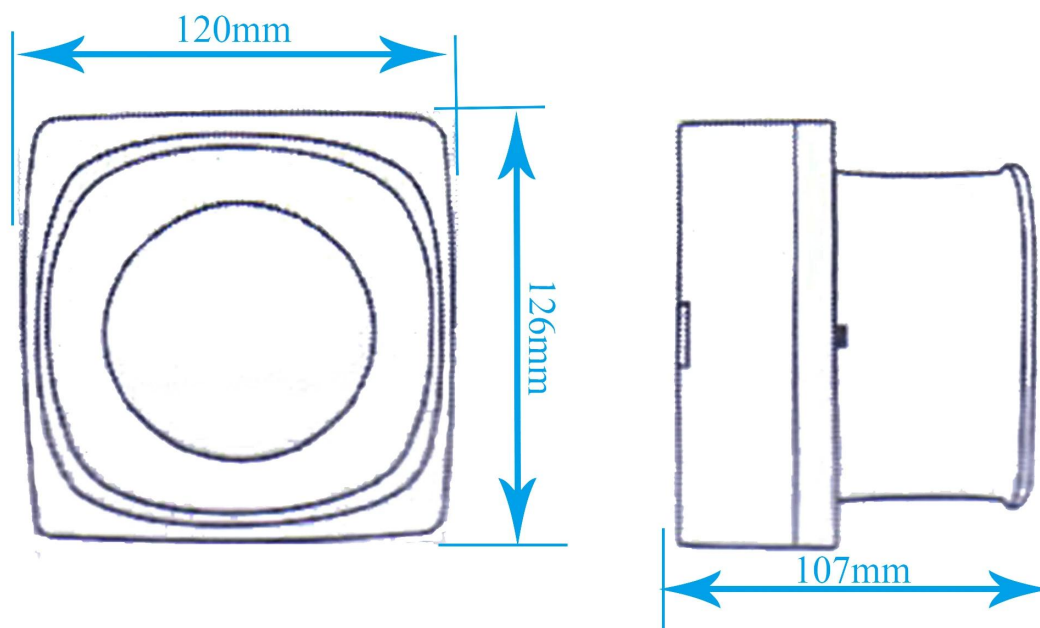

Appearance

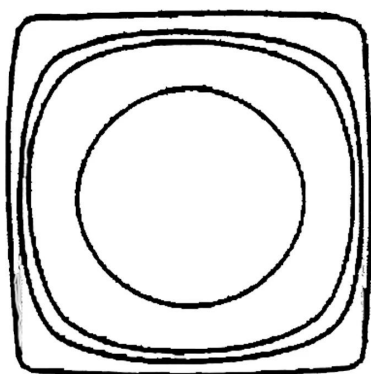


Front

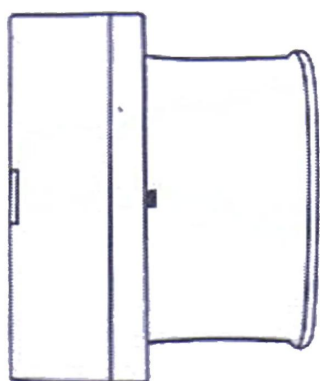




Side



Waterproof

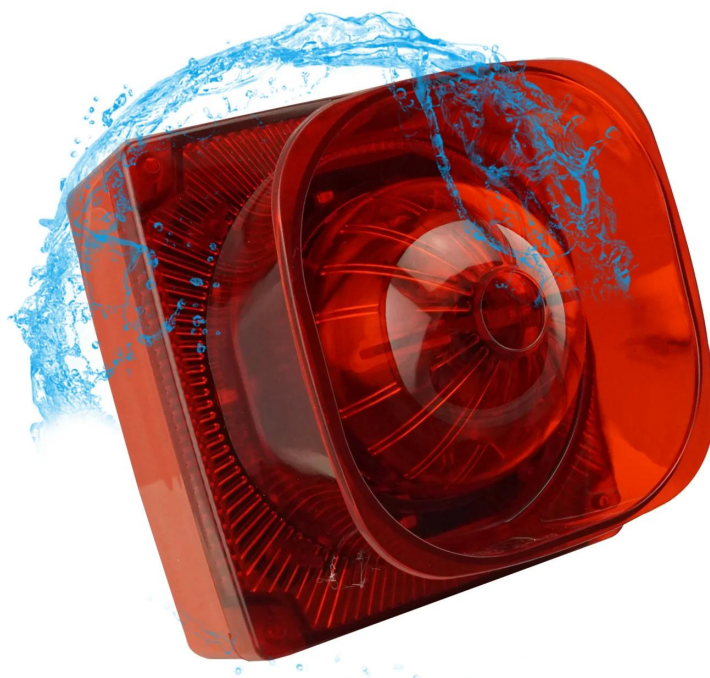


4 wires 8 tones

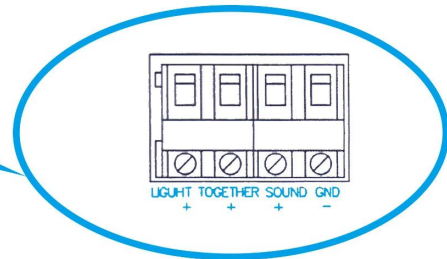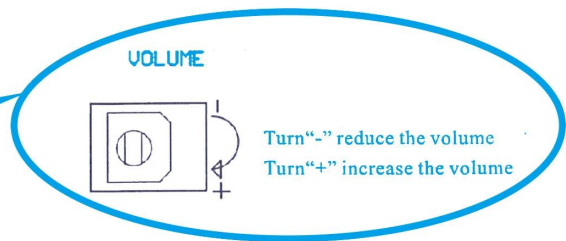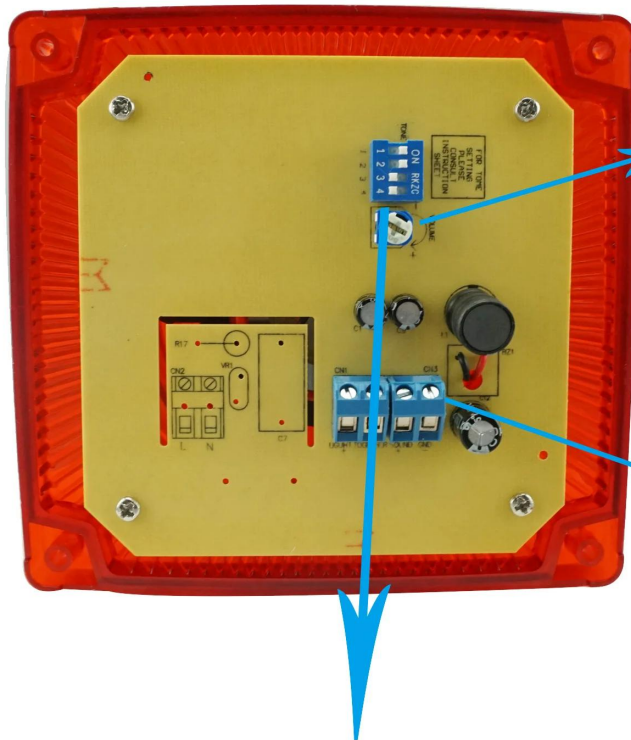

Code setting	Operating Voltage DC12V, switch "NO" to "0"		
Switch 123	Sound species	Pulse description	DB level
LLL/000	119	High level 180uS,low level max:1800uS,min:880us	116+/- 2db
HHL/110	Last"di" 0.7hz	High level 85uS,low level 890us	110+/- 2db
LHL/010	Sounding"du"	High level 115uS,low level 1400us	114+/- 2db
HLL/100	High sound 119	High level 105uS,low level max:1150uS,min:960us	115+/- 2db
LHH/011	Nomal 120	High level 180uS,low level max:2090uS,min:1620us	116+/- 2db
HLH/101	High sounding "di"	High level 95uS,low level 930us	111+/- 2db
LLH/001	120 with fast	High level 180uS,low level max:2090uS,min:1620us	114+/- 2db
HHH/111	High sound 120 with fast	High level 140uS,low level max:1100uS,min:950us	116+/- 2db

8 Types
Voice& light combination
freely adjustable

Ano ang hitsura ng EB-162?

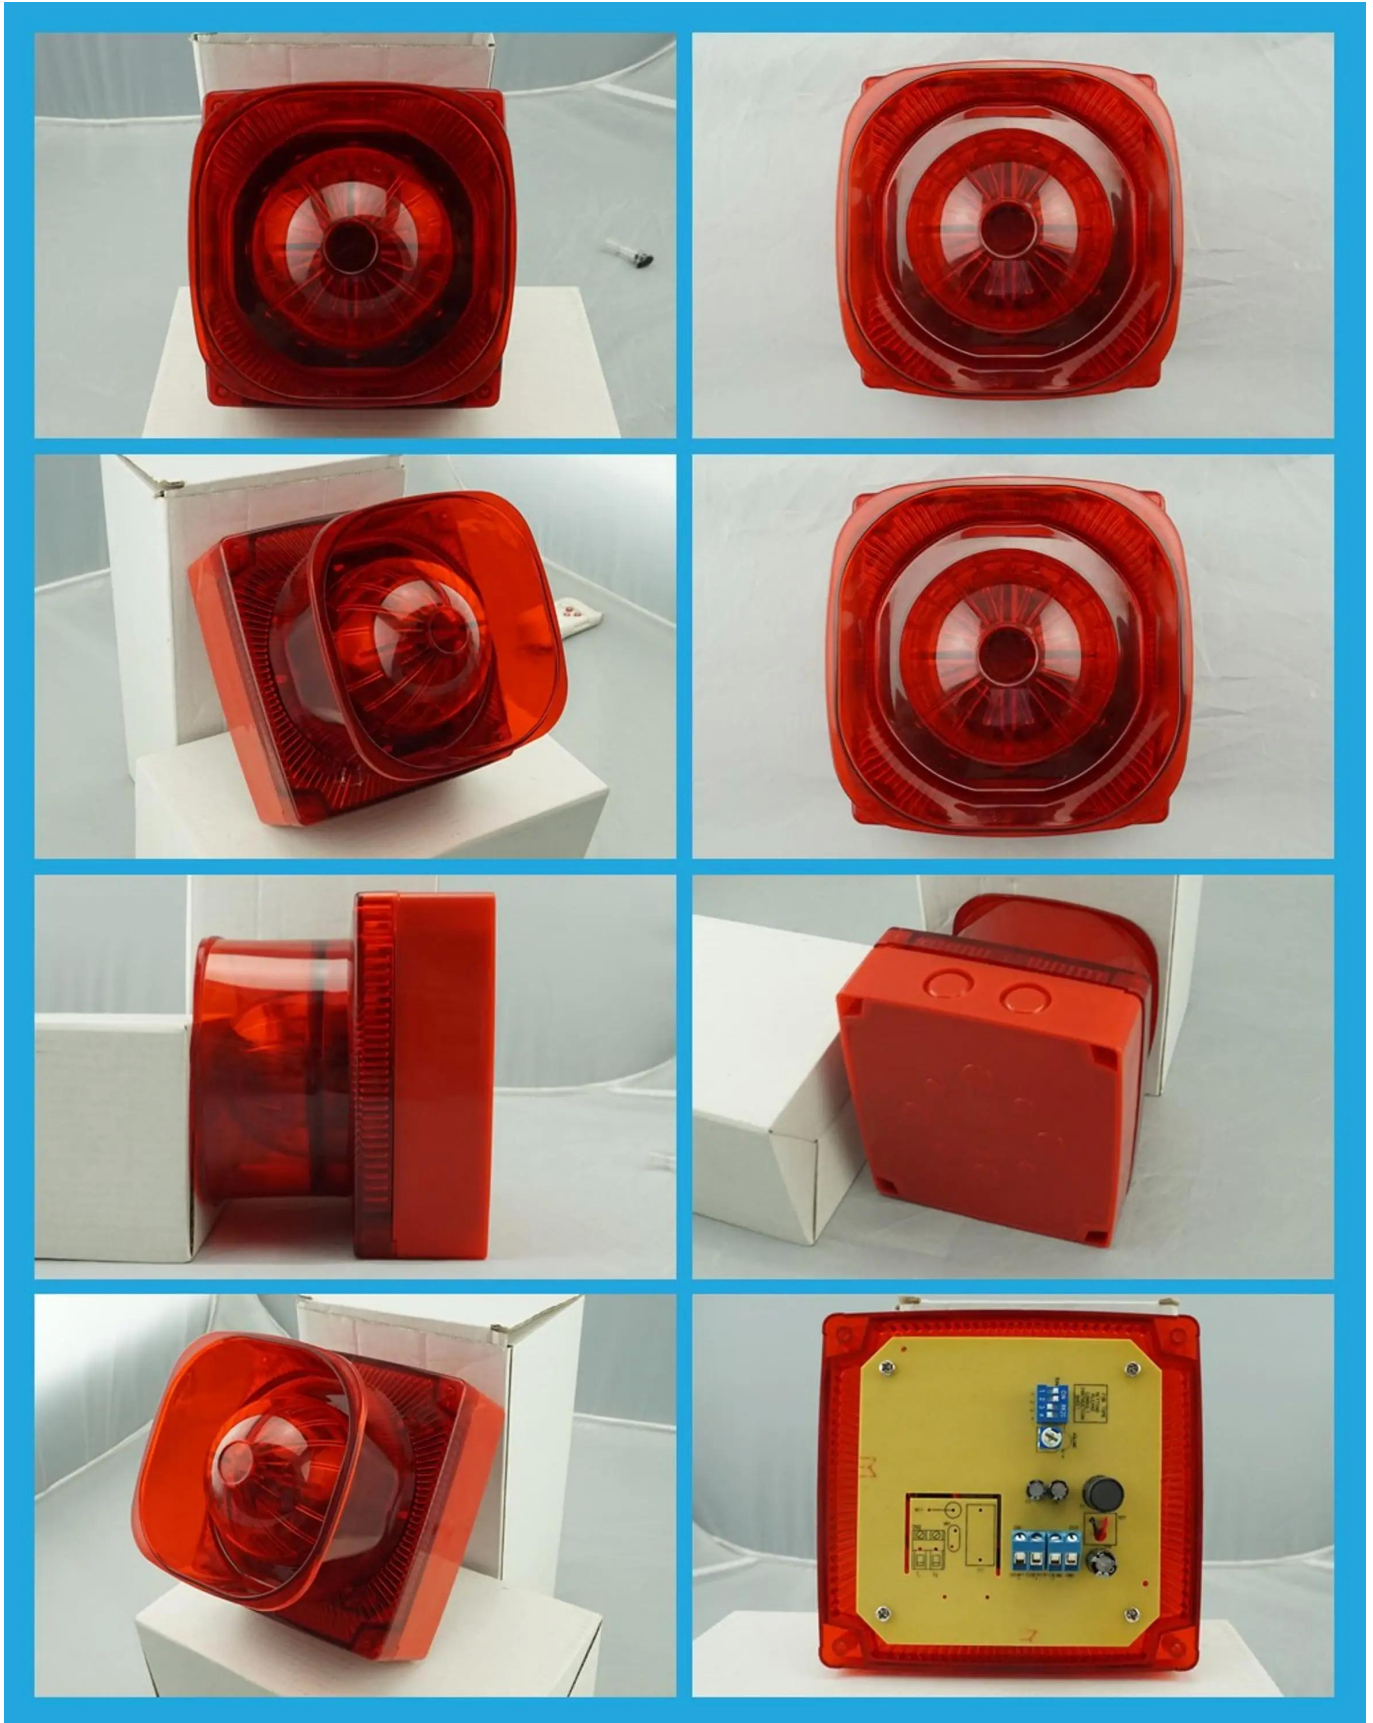


EB-162's standard package



Where to use ?



Suitable for all kinds of emergency situation!

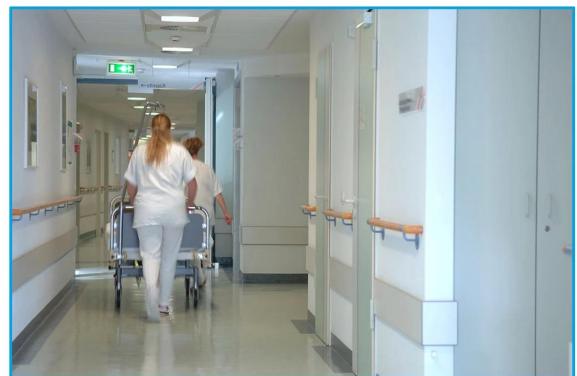

Paano ang ibang pagpipilian?



SMQT show



Team



Factory



Certificate



