


4 telli duman NO NC çıkışı ile yangın alarm sistemi için dedektör ayarlanabilir



EB-117B GİBİ NEDİR?

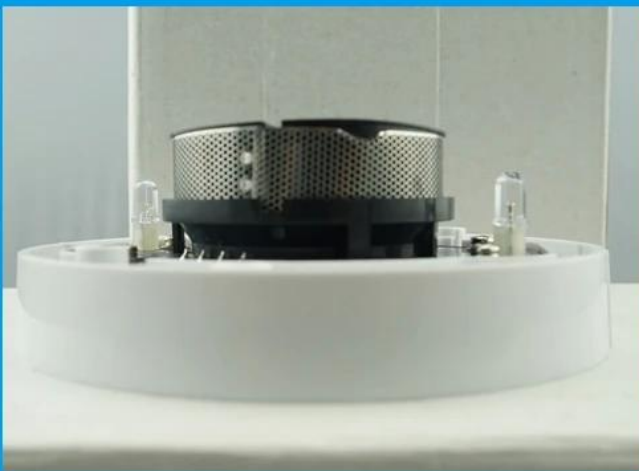

EB-117B'nin standart paketi hakkında NASIL?



EB-117B'NİN ANA PARAMETRESİ

Ürün Adı:	Yangın alarmı için 4 telli duman dedektörü NO NC çıkışı ayarlanabilir sistem
Model numarası:	EB-117B
Güç arz:	DC 9 ~ 35V
Tel Liman:	4 port (Giriş gücü +, giriş gücü, Röle çıkışı (COM), Röle çıkışı (NO veya NC))
Boyut:	100 çap * 60 (mm)
Algılama alanı:	20 kare metre
Alarm göstergesi	Kırmızı LED ışığı
İçin uygun:	Yangın alarm paneli sistemi
Kurulum yolu:	Tavana monte
Çalışma sıcaklığı:	-10 Derece Santigrat ~ +50 Derece Santigrat
Çalışma nemi:	0 ~ 90% RH (yoğunlaşma yok)
Ağırlık:	0.18kg
LED:	2 LED ışığı
Malzeme:	ABS muhafazası + PCB yazı tahtası
Konut rengi:	Beyaz
Garanti:	2 yıl garanti
OEM:	Hoşgeldin oem

EB-117B NE ÖZELLİKLERİ VAR?



1.4 wire fire alarm system photoelectric smoke detector

2.Working power 9~35V DC

3.Standby current :2 mA(24V NO), 13mA(24V NC)

4.Alarm current:18 mA(24V NO),6 mA(24V NC)

5.Alarm indication:Red LED on

6.Wire port: POWER+(In)/POWER-/ COM/

7.Suitable for fire alarm panel system


8.Conformed EN54-7/UL268 standard

9.2 years warranty , welcome OEM

EB-117B NASIL ÇALIŞIYOR?



4 wire detectors wiring diagram

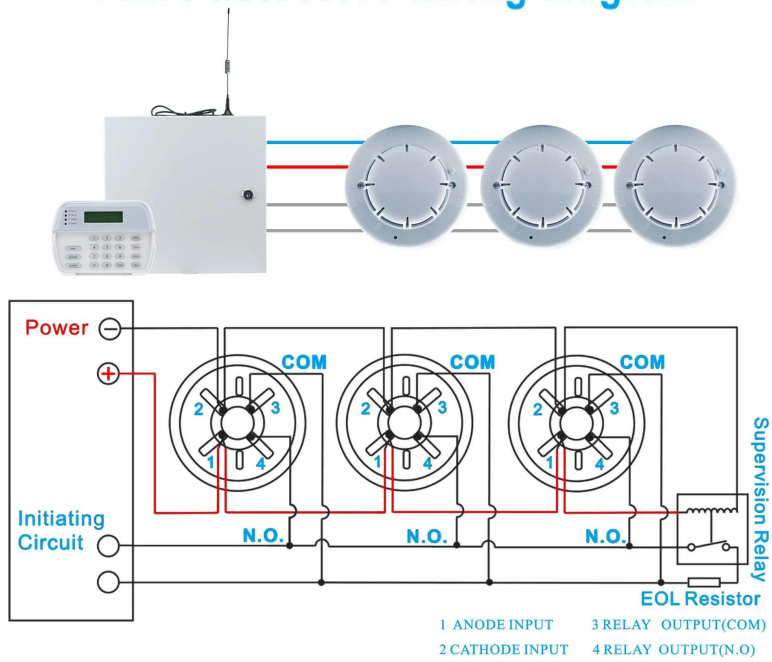

PCB board display



Where to installation?



Mall



Library



Bank

DİĞER SEÇİM HAKKINDA NASIL?

SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技

