



Yangın alarm sistemi için EN54 UL standardı ile uyumlu 9 ~ 35V DC 4 telli fotoelektrik duman dedektörü

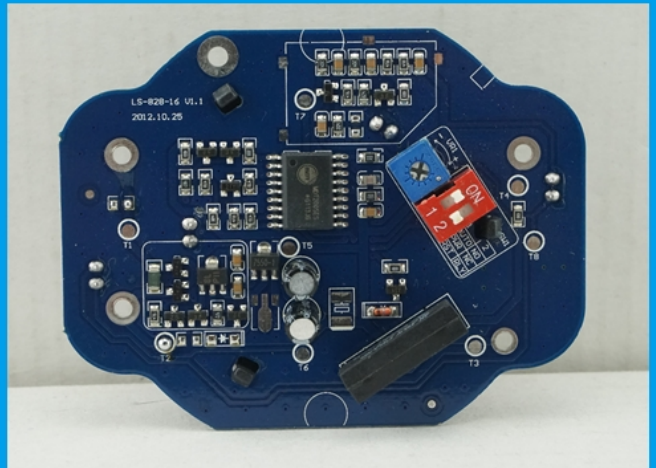

EB-117D GİBİ NEDİR?

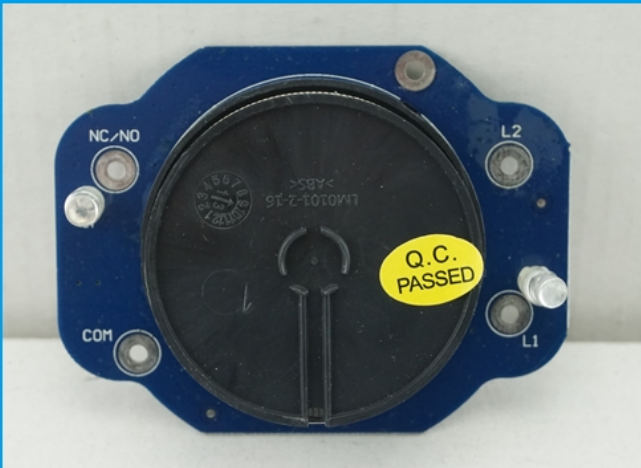

EB-117D'NIN ANA PARAMETRESİ

Ürün adı:	Yangın alarm sistemi için EN54 UL standardı ile uyumlu 9 ~ 35V DC 4 telli fotoelektrik duman dedektörü
Model numarası:	EB-117d
Güç kaynağı:	DC 9 ~ 35V
Tel portu:	4 port (Giriş gücü +, giriş gücü, Röle çıkışı (COM), Röle çıkışı (NO veya NC))
Boyut:	103diameter * 53 (mm)
Algılama alanı:	20 metrekare
Alarm göstergesi	Kırmızı LED ışığı
İçin uygun:	Yangın alarm paneli sistemi
Kurulum yolu:	Tavana monte
Çalışma sıcaklığı:	-10 Derece Santigrat ~ +50 Derece Santigrat
Çalışma nemi:	0 ~ 90% RH (yoğunlaşma yok)
Ağırlık:	0.218kg
LED:	2 LED ışığı
kurcalamak:	Evet
Malzeme:	ABS muhafazası + PCB kartı
Konut rengi:	Beyaz
Garanti:	2 yıl garanti
OEM:	Hoşgeldin oem

NE ÖZELLİKLERİ EB-117D VAR?



1.9~35V DC 4 wire fire alarm system photoelectric smoke detector

2.Working power DC 9~35V

3.Standby current 2mA(24V NO),13mA(24V NC)

4.Alarm current 18mA(24V NO), 6mA(24V NC)

5.Alarm indication:Red LED on

6.Wire port: POWER+(In)/POWER-/COM/NC(NO)

7.Suitable for fire alarm system



8.Conformed with EN54-7/UL268 standard

9.2 years warranty , welcome OEM

EB-117D NASIL ÇALIŞIYOR?




4 wire detectors wiring diagram

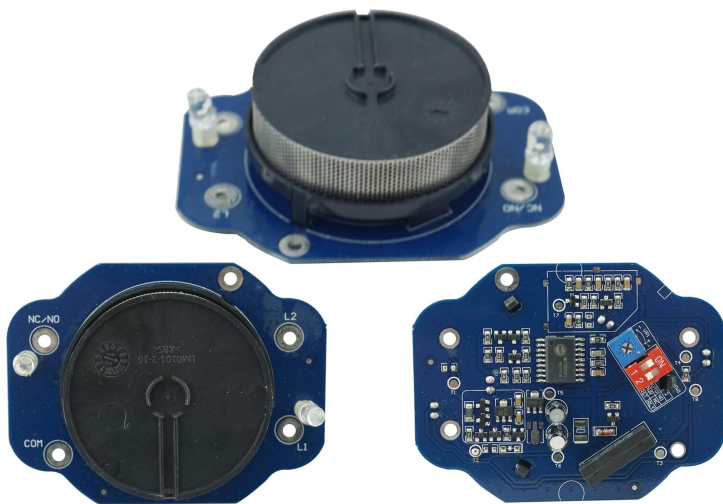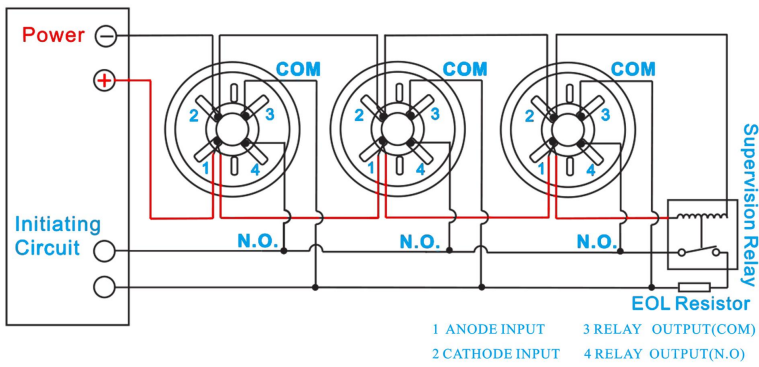

PCB Board

Where to installation?



Mall



Library



Bank

DİĞER SEÇİM HAKKINDA NASIL?

SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技



SMQT
铭汗科技

