

RS485 شاشة التحكم في الوصول باب واحد لوحة المفاتيح مع اتصال شبكة OLED





Main parameter

Power supply	DC 9-15V
Power consumption	< 1 W
Card type	13.56 MHz / 125 KHz (Optional)
Read range	5-8cm
Capacity of records	10000
Number of users	10000
Communication port	RS485
Transmit Rate	9600 bps (N, 8, 1)
LED Tips	Card flashing/keypad/doorbell
Data storage	4M bits FLASH Memory
Certification	Card flashing/ Card flashing+password/ User ID+password/ Public password
Clock	Yes
Reading tips	Beeper/OLED/LED
Dimension	96×96×22(mm)
Material	PC+ABS Screen: PMMA
Environment	-30℃to+65℃

EA-82DK'S MAIN PARAMETER


显示模块:	OLED 128 64 点阵模块 128 64 点阵模块 128 64 点阵模块 R485 接口
显示模块:	EA-82DK

電源電圧 消費電圧電圧 電圧:	9 ~ 15V DC
消費電力 消費電圧:	消費電力 & lt1 W
サイズ:	96× 96 × 22 (mm)
消費電圧電圧 電圧:	10000 消費電圧
消費電圧 電圧 RFID:	ID (125KHZ) / IC (13.56MHZ) (消費電圧)
消費電圧 消費電圧電圧 消費電圧:	3 ~ 5CM
消費電圧電圧 消費電圧:	消費電圧 消費電圧 消費電圧 消費電圧 消費電圧 WG 消費電圧 消費電圧 消費電圧 消費電圧 消費電圧
消費電圧電圧 消費電圧:	消費電圧電圧 消費電圧電圧 消費電圧電圧 消費電圧 消費電圧
消費電圧電圧:	消費電圧電圧 消費電圧電圧 消費電圧 消費電圧 消費電圧
消費電圧電圧:	消費電圧電圧 消費電圧電圧 消費電圧 消費電圧 消費電圧 消費電圧 hospital
消費電圧:	消費電圧 ABS + 消費電圧 PCB + 消費電圧 OLED (PMMA)
消費電圧:	240G
消費電圧電圧電圧 消費電圧電圧:	消費電圧 消費電圧電圧電圧 消費電圧電圧 消費電圧 消費電圧 消費電圧電圧電圧 消費電圧電圧電圧 37 消費電圧電圧電圧 消費電圧電圧電圧電圧電圧電圧 1
消費電圧 消費電圧電圧電圧 消費電圧電圧:	-35 °C ~ 65 °C
消費電圧電圧電圧電圧:	20 ~ 80
消費電圧:	1 消費電圧電圧電圧電圧
OEM:	消費電圧電圧電圧電圧電圧電圧電圧電圧電圧電圧

Appearance





Wiring diagram

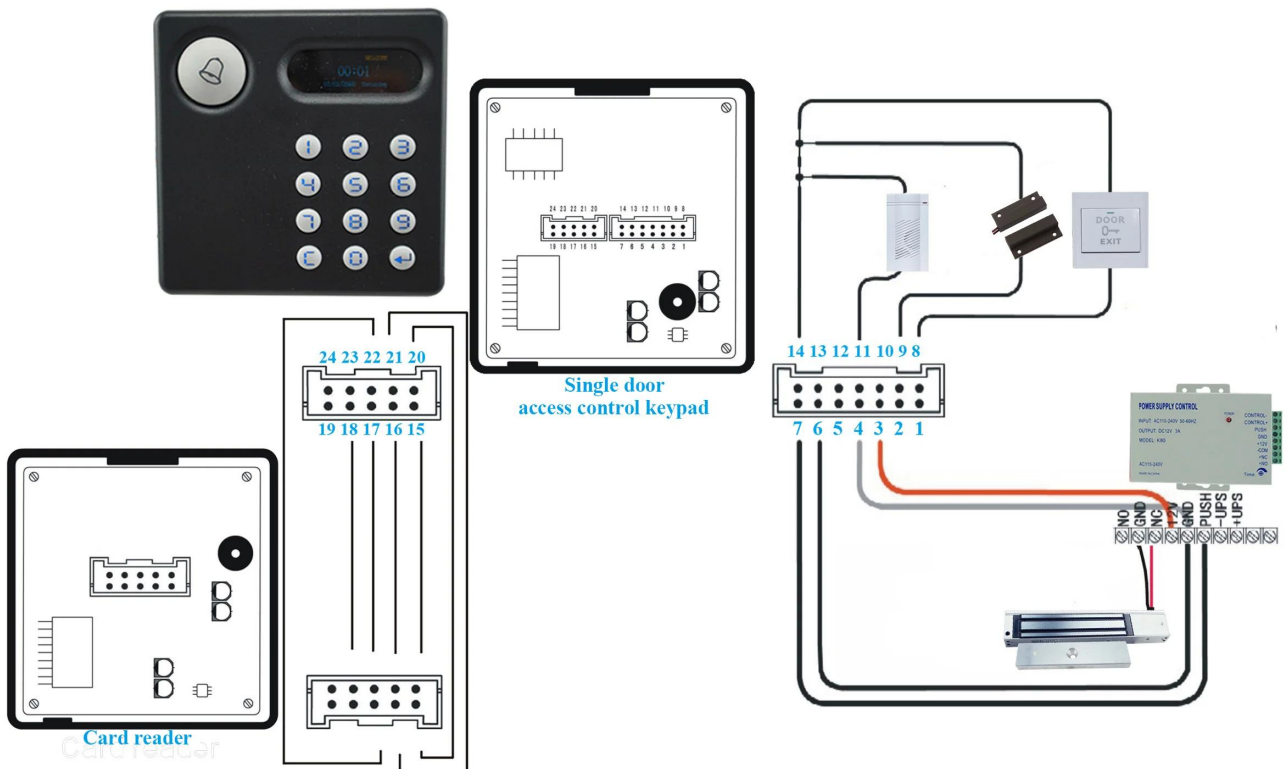

Wire port specification		
NO	Function	Description
1	RS485+	Data +
2	RS485-	Data -
3	12V+	DC Power 12V
4	GND	GND
5	OUT-NC	Door relay NC interface
6	OUT-COM.	Door relay COM interface
7	OUT-NO.	Door relay NO interface
8*	IN 1	Input 1, door release button input
9*	IN 2	Input 2, door magnet signal input
10*	IN 3	Input 3, user-defined
11	OC OUT	Build-in doorbell signal output
12*	OUT 2	OC signal, duress output
13*	OUT 3	OC signal, anti-tamper output
14	GND	GND
15	OUT 12V+	Power output, can be connected to WG reader power +
16	GND	Power output, can be connected to WG reader power GND
17	DATA 0	WG Data 0 input, connect reader Data 0
18	DATA 1	WG Data 1 input, connect reader Data 1
19	GND	GND
20	OC1-OUT	Unregistered card output, OC signal output for 3s after card flashing to open the door, can connect Green LED end of WG reader.
21	OC2-OUT	Unregistered card output, OC signal output for 3s after card flashing but not to open the door, can connect Red LED end of WG reader.
22	OC3-OUT	Unregistered card output, OC signal output for 3 times after card flashing to open the door, each interval time is 100ms, can connect Beeper end of WG reader.
23	NULL	N/A
24	ANTI-TAMPER-IN	Anti-tamper signal input, connect anti-tamper output signal of WG reader

Installation

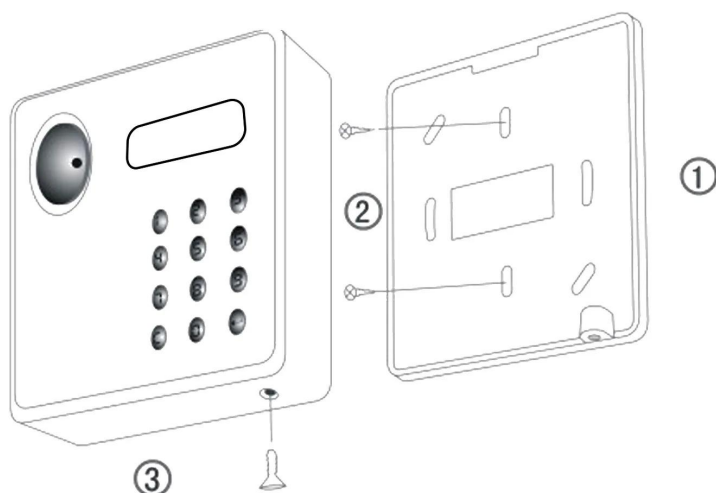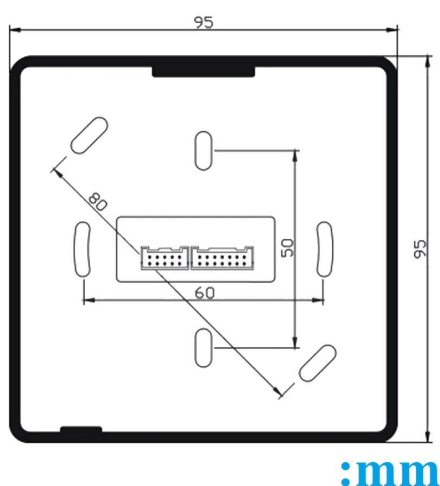

کیف حول خیار آخر؟

SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技



SMQT[®]
铭汗科技

