

Waterproof outdoor door access control Wiegand 26/34 Rfid Reader card reader with metal material frame



MQ-712B's main parameter

Product Name:	IP 67 Waterproof wiegand 34/26 outputl rfid door access control system card reader
Model number:	MQ-712B
Card type:	IC card(13.56MHz)
Power supply:	DC12V
Working current:	30~180mA
WG output format:	Default WG34, support WG26, WG34, WG66, the format of WG output can be customized
Support card:	MifareS50/S70/Desfire/NTAG213/NTAG216/ultrlight/FM1204/FM1208 CPU card/FEILICA/HID ICLASS
Reading distance:	0~3CM
Communication distance:	<80m(between card reader and controller)
Waterproof:	IP67
Dimension:	120 * 80 * 20(mm)
Wires ports:	7 wires
Contact output:	12V+(Red wire)/GND(Black wire)/D0(Green)/D1(White) /Beeper(Purple)/LED(Grey) /WG26 adjustable wire(Yellow)

Suitable for:	Door access control system
Material:	Metal frame+Acrylic+ PCB board
Housing color	Silver frame+ Black panel
Weight:	0.45kg
Warranty:	1 years warranty
OEM:	Welcome OEM

What features MQ-712B have?

Size



Appearance



What type card it can read?




Wire port introduction



- Red: DC 12V+ input
- Black: GND
- White: Wiegand D1
- Green: Wiegand D0
- Purple: Buzzer
- Gray: LED
- Yellow: WG adjustable wire

Package list

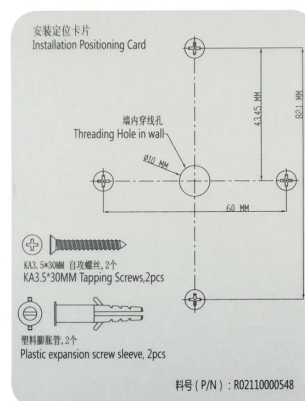

How about other choice?

